



Brookhaven
National Laboratory

BNL-101576-2014-TECH
RHIC/PG/33;BNL-101576-2013-IR

RHIC Lattice

J. Claus

February 1984

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

RHIC LATTICE

J. Claus

(BNL, February 22, 1984)

Lattices for RHIC

Claus

Dell

Hahn

Ruggiero

Basic Facts.

Luminosity deteriorates as function of time due to intra beam scattering



Luminosity life time
Time average luminosity

Life time and time average are limited by the ring admittances.

Problem: How to provide adequate admittances for acceptable cost?

Admittance is determined by aperture and focussing structure.

Transverse focussing structure consists of arcs and insertions.

Focussing in arcs determined by cell length and betatron phase advance/cell.

Cell length and phase advance affect the lattice functions, the intra beam scattering process and the cost differently.

Therefore: study different lattices.

How do we choose bench mark designs?

Different numbers of cells/are: 9, 12, 15

Different phase advances/cell: 90° , 120°

Important constraint: γ_{tr} , a parameter set by the focussing structure.

The particle motion is subject to $\eta = \frac{1}{\gamma_{tr}^2} - \frac{1}{\gamma^2}$

$$\gamma = E/E_0$$

$\eta = 0$ represents singular point, to be avoided or at least to be passed through quickly.

Cannot avoid it:

$\gamma_{tr} < \gamma_{inj} (\sim 12.5/AMU) \rightarrow$ impractically weak focussing

$\gamma_{tr} > \gamma_{final} (\sim 100/AMU) \rightarrow$ impractically slow focussing

However: proton injection at $\gamma = 31.4 \rightarrow$
 $\gamma_{tr} \neq 31.4$

Options and Constraints.

- 1 Structure has to fit inside existing CBA tunnels
- 2 Injection must occur via existing beam transfer tunnels
- 3 Beams close together radially to allow use of $2\text{ in } \pm$ magnet designs or at least of common vacuum vessels
- 4 Dipoles of different rings on common radii (or same reason)
- 5 Side by side configuration (as in CBA) Over/under leads to more complex insertions.
- 6 $\beta_y^* = 3\text{ m}$
 $\beta_x^* = 3\text{ m}$ (for $\alpha = 0$)
 $x_p^* = 0. \text{ m}$
- 7 Variable crossing angle ($0 \leq \alpha \leq 8\text{ mrad}$)
- 8 Adjustable betatron frequencies
- 9 Insertions decoupled from each other and from arcs.

1, 2, 8 Essential

6 Somewhat negotiable

9 Very desirable

1, 2, 6, 9 together pose a very difficult design problem.

Results so far

		# cells	phase advance
Def.:	RHIC1	9	90°
	RHIC2	9	110°
	RHIC3	12	90°
	RHIC4	15	120°

RHIC1,2 is a further development of the feasibility study lattice:

CBA → feasibility study → RHIC1 → RHIC2



The aperture requirements decrease with increasing cell number, the component count increases with increasing cell number.

Status: RHIC1, RHIC3 (3 versions) ready for further work
RHIC2 (2 versions) needs minor touching up
RHIC4: in process.

RHIC2 B has a strongly asymmetric dipole distribution in the cells.
→ higher $f_k = 25.2$
inefficient use of available space
higher required dipole fields.

3 different insertions for RHIC3


1	NAME	RNIC1	RNIC2		RNIC3			RNIC4
2	VERSION		A	B	A	B	C	
3	# Cells / Arc	9	9			12		15
4	Phase advance / cell	90	110			90		120
5	ftr	19	22.3	25.2		24.8		39
6	# dip \rightarrow	246	246			336		408
7	# quadrupoles	348	396		468	444	468	540/636
8	β_x^* / β_y^* (m)	40/2.0	2.7/2.9	2.7/3.0	17.1/30	22.4/30	29/30	?/?
9	$\hat{\beta} / \check{\beta}$ (m)	66.8/11.6	76/76	76/76		50/8.8		49.7/3.8
10	\hat{x}_p / \check{x}_p (m)	2.7/1.3	2.1/0.9	2.0/0.75		1.5/0.75		0.7/0.29
11	$\Delta\psi_x / \Delta\psi_y$	1.5/1.5	2/2		1.5/1.5	1.5/1.5	2.0/2.0	
12	$\hat{\beta}_x^A / \hat{\beta}_y^A$ (m)	147/452	836/531		254/523	236/739	229/312	
13	$\varepsilon_x / \varepsilon_y$	-33/-52	-98/-75		-42/-53	-38/-65	-48/-56	-69/-69
14	$B''e / B\rho$ (m) ⁻²	0.0157/0.078	0.076/0.145		0.059/0.142	0.054/0.169	0.066/0.151	0.145/0.355
15	$B'e / B\rho$ (m) ⁻¹	0.0358	0.0414			0.0477		0.0731
16	Half cell length (m)	19.75	19.75			14.81		11.85

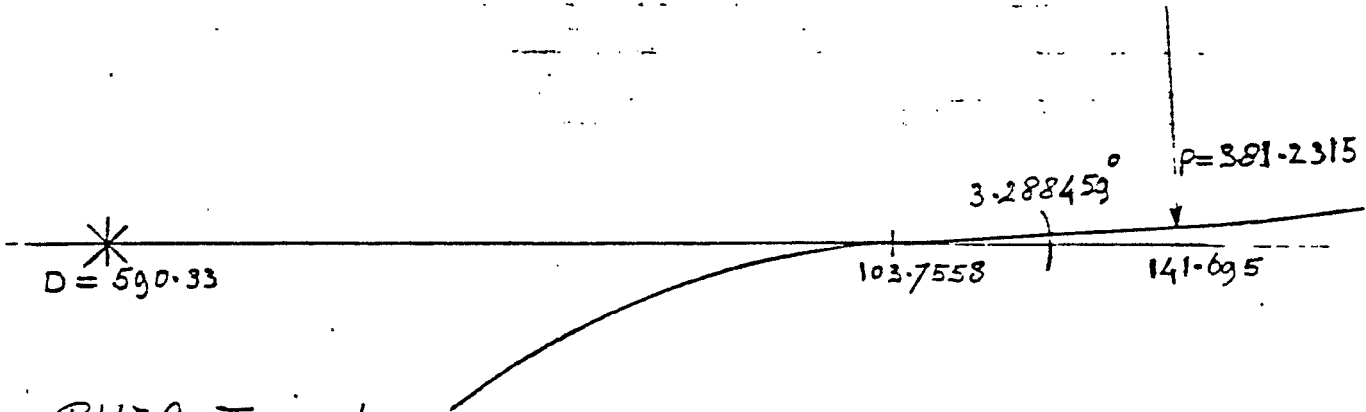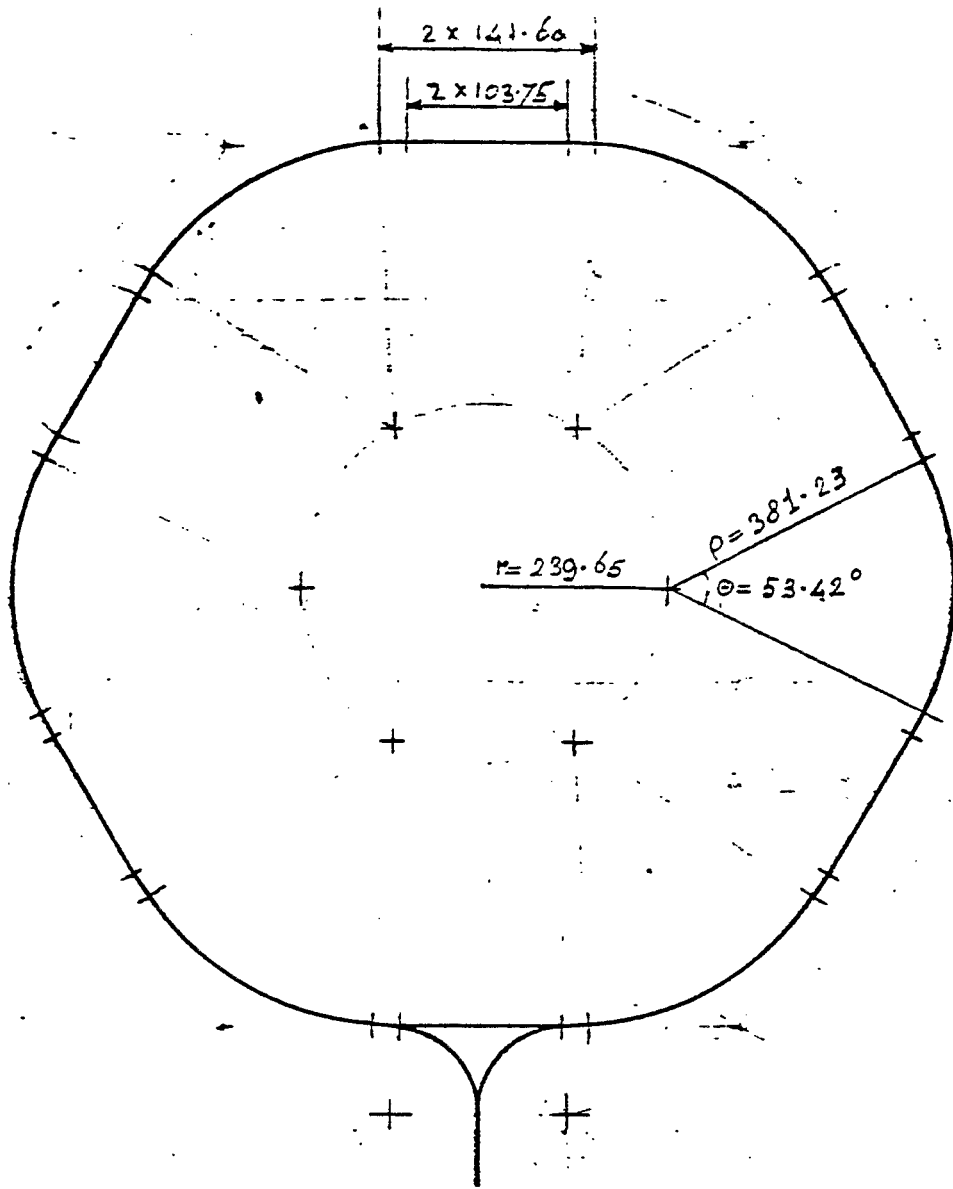

RHIC Tunnel


~~ISA~~ Geometry, July '78

circumference 3833.84 m

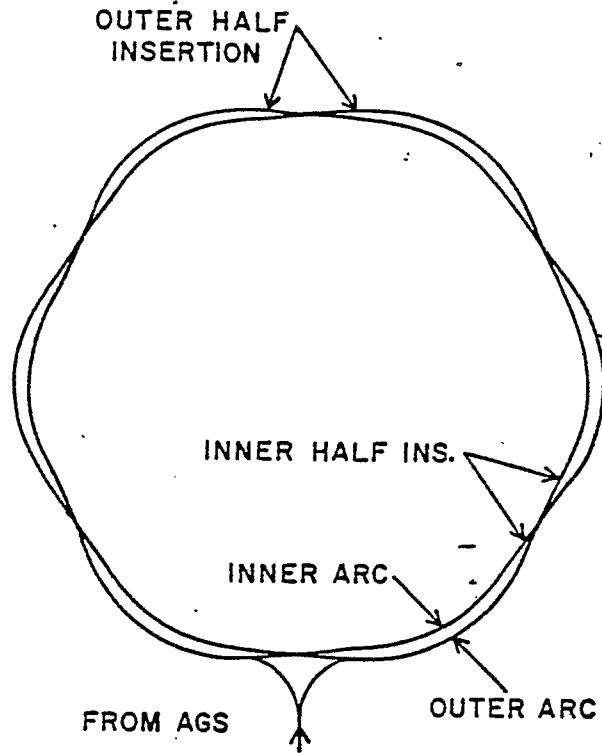


RMLC

Fig. 1.1. Topology of ISABELLE.

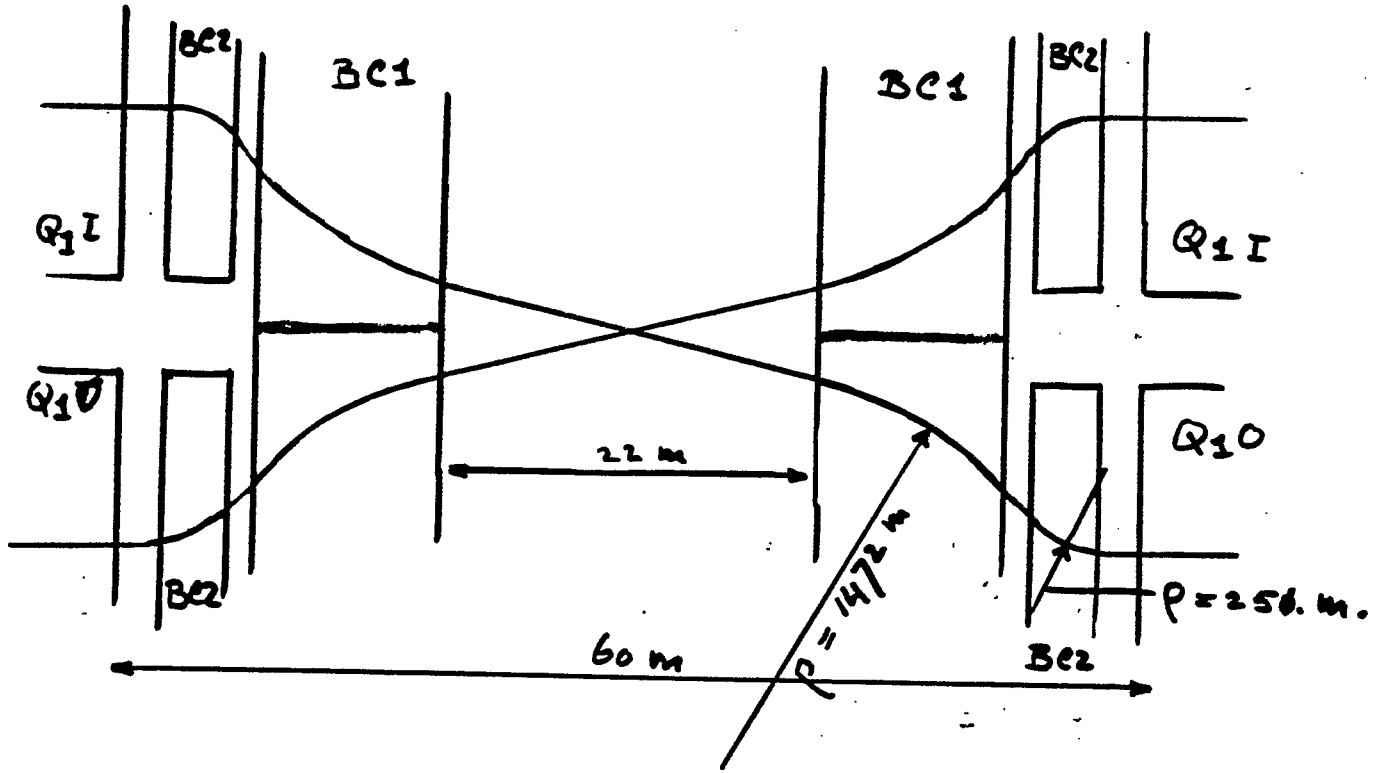

Crossing point Configuration
for R.H.I.C.

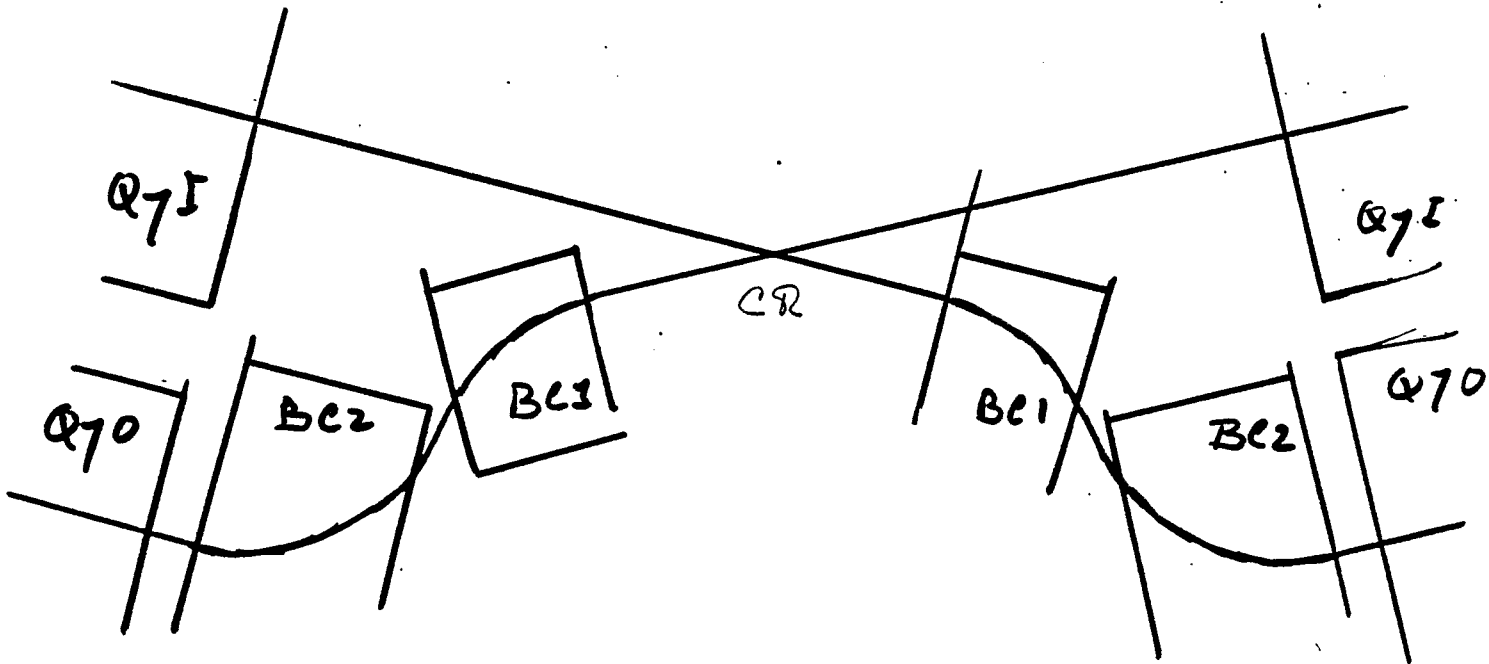

Alternate Crossing Point
Configuration for R.H.I.C


RHIC Regular Cell Pair (02/14/84 09.48.54)


$$\Theta_{HC} = \frac{B_{dip} l_{dip}}{(B\rho)} = 0.03885 \text{ rad}$$

$$\frac{B' l_q}{(B\rho)} = 0.1066 \text{ m}^{-1}$$


$$R_{AV} = 381.23 \text{ m}$$


$$L_{HC} = 14.811 \text{ m}$$

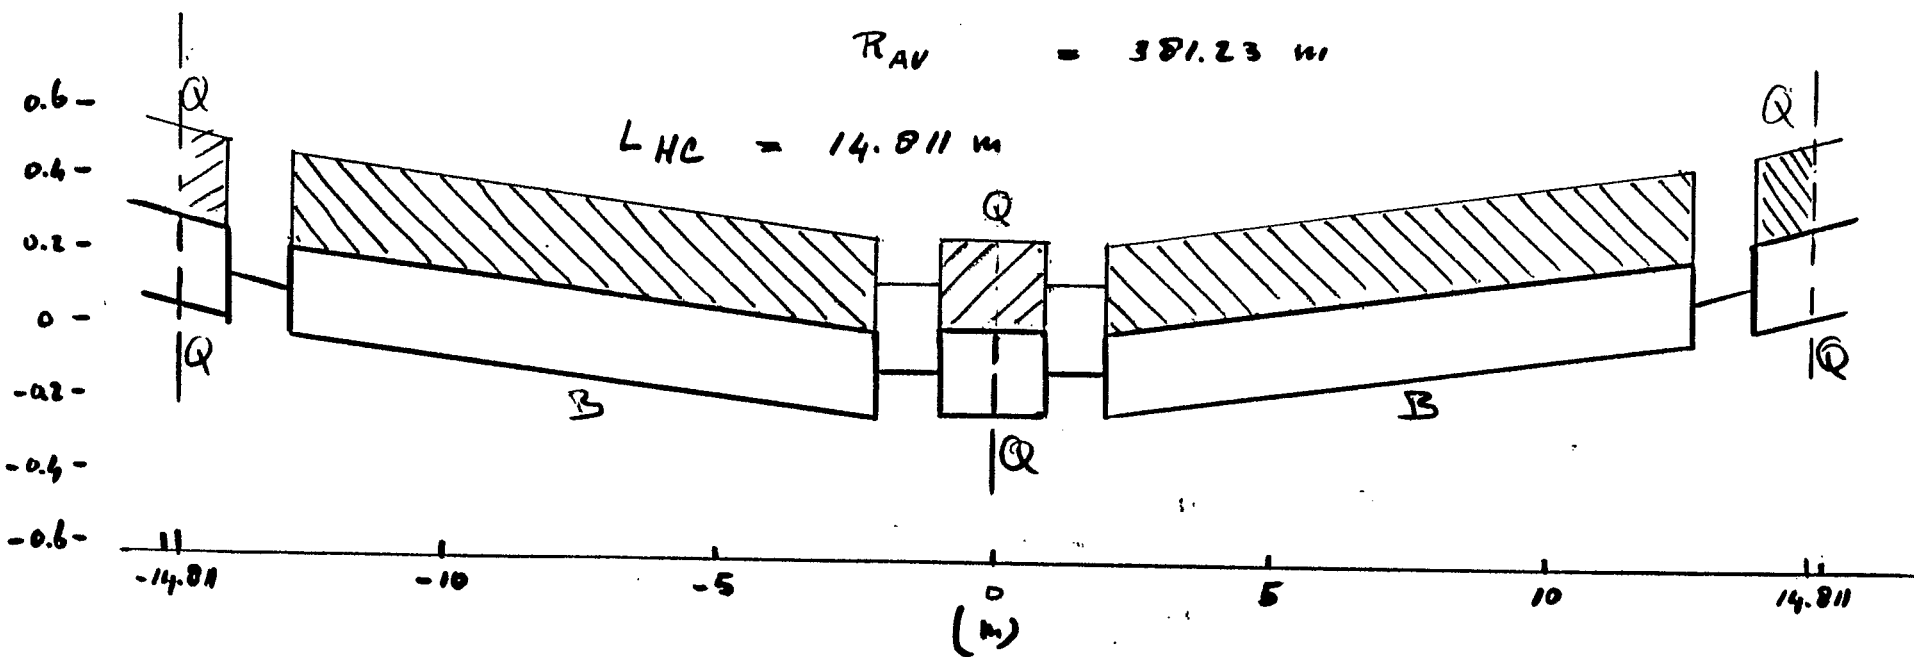

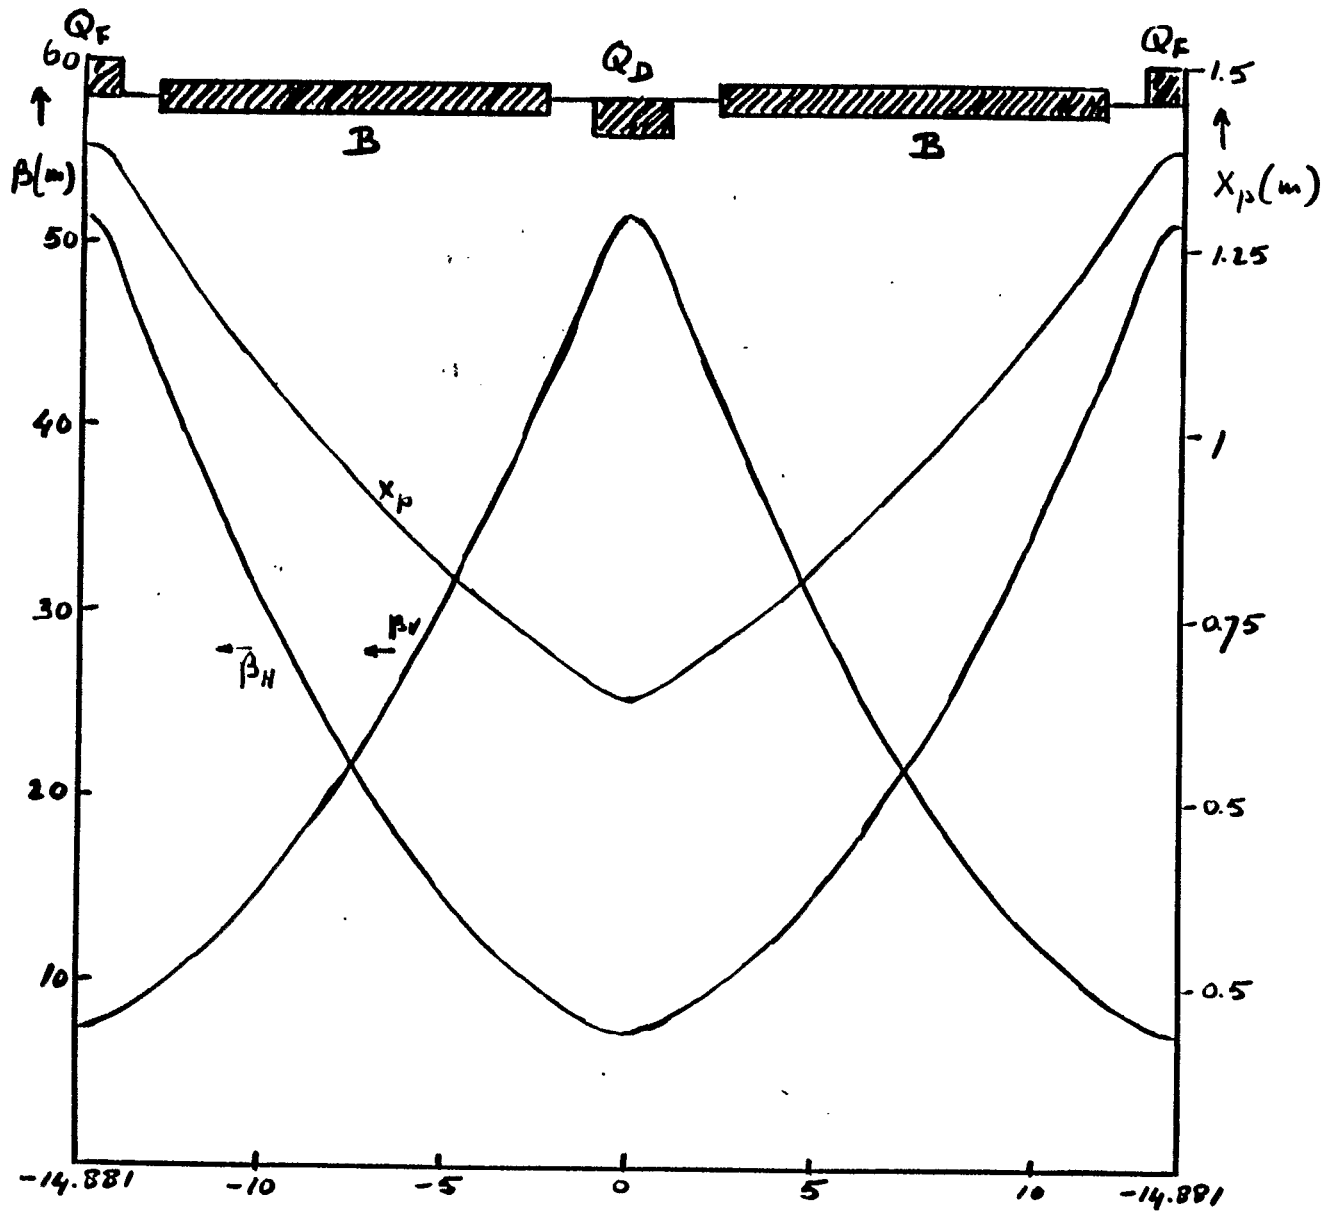

RHIC REGULAR ARC CELL (02/14/84 09.48.54)

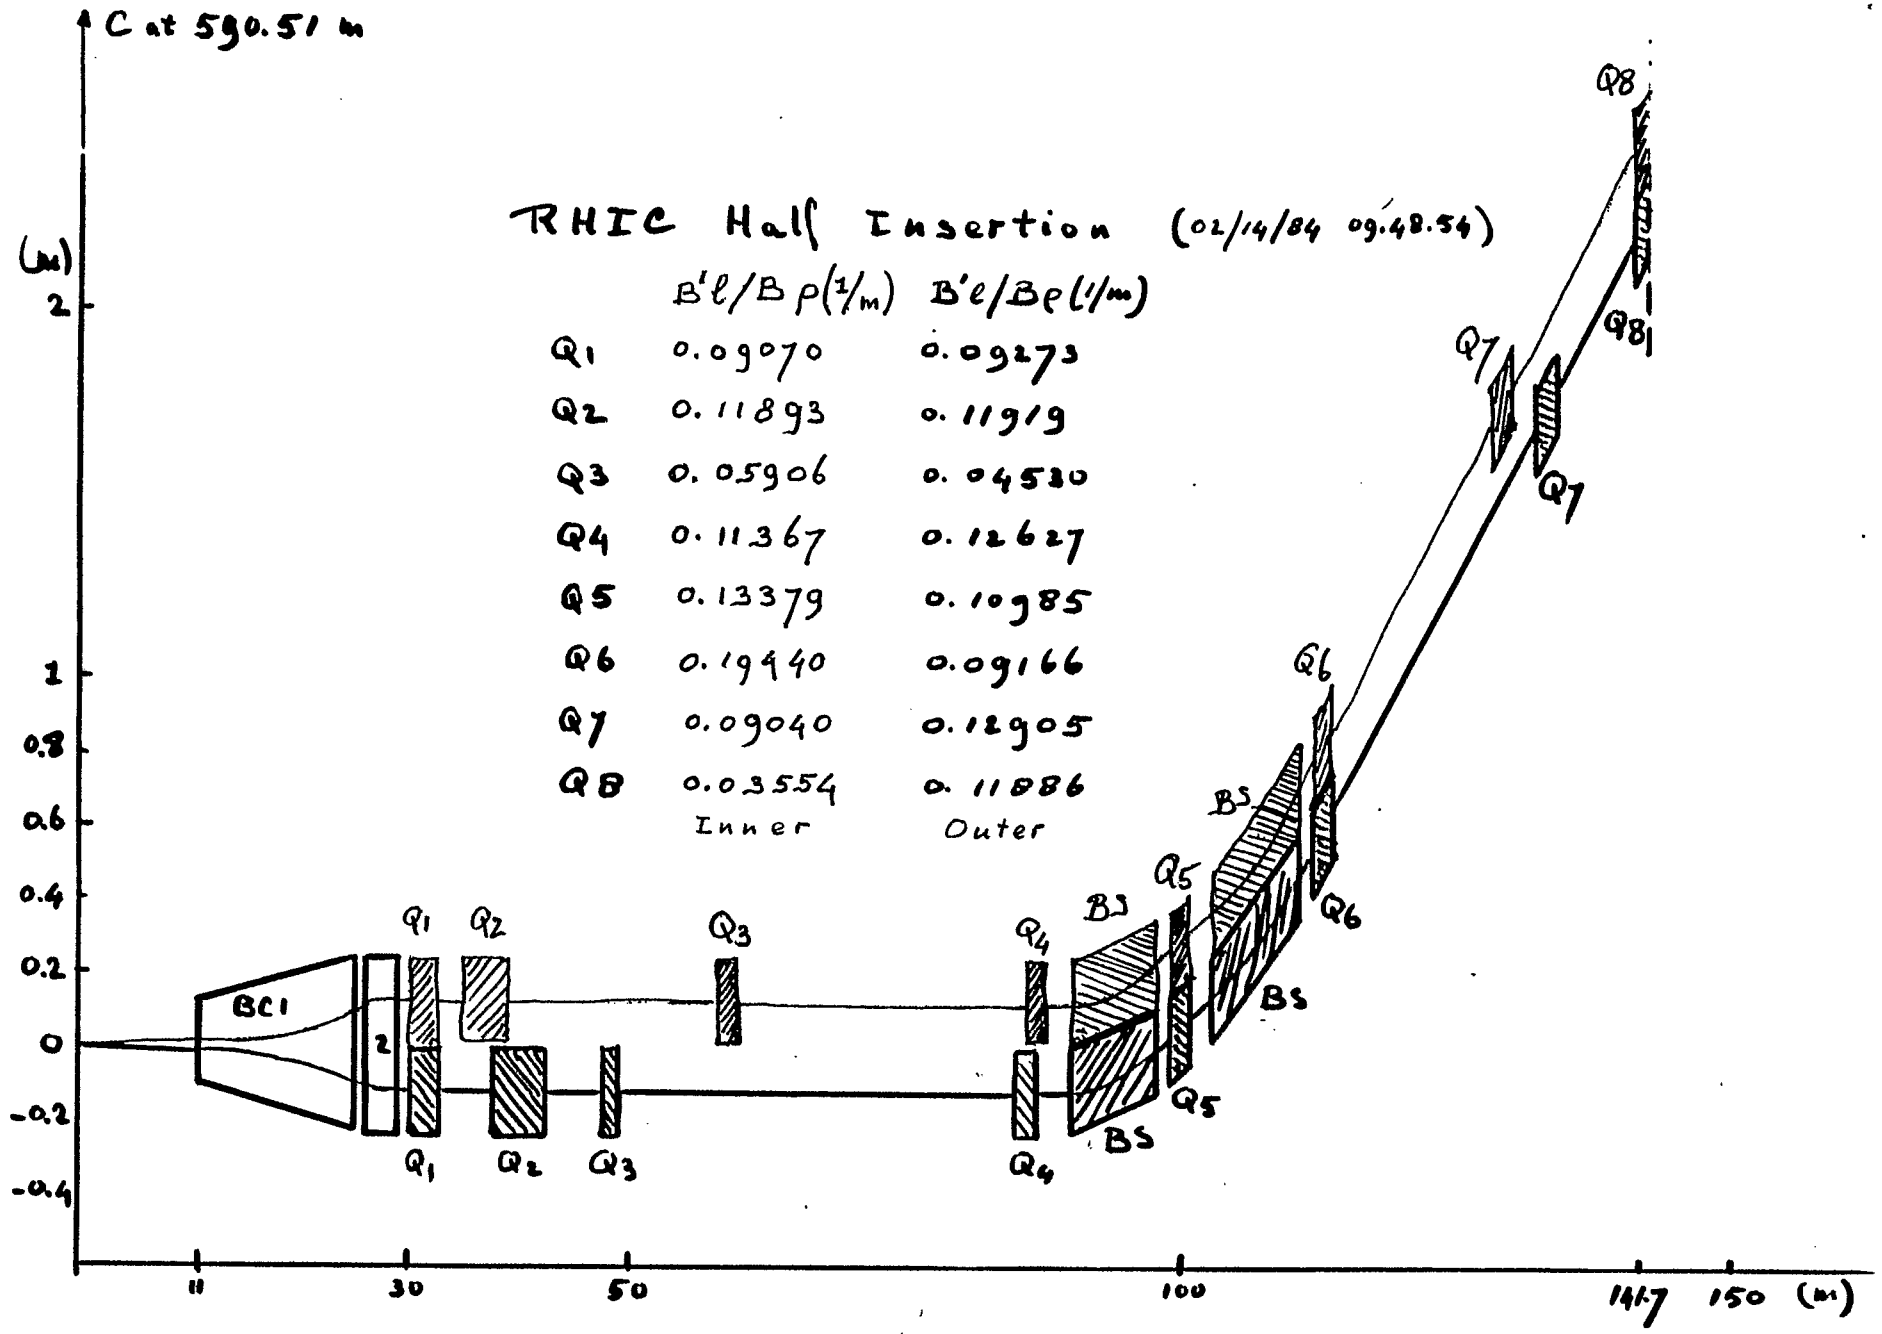

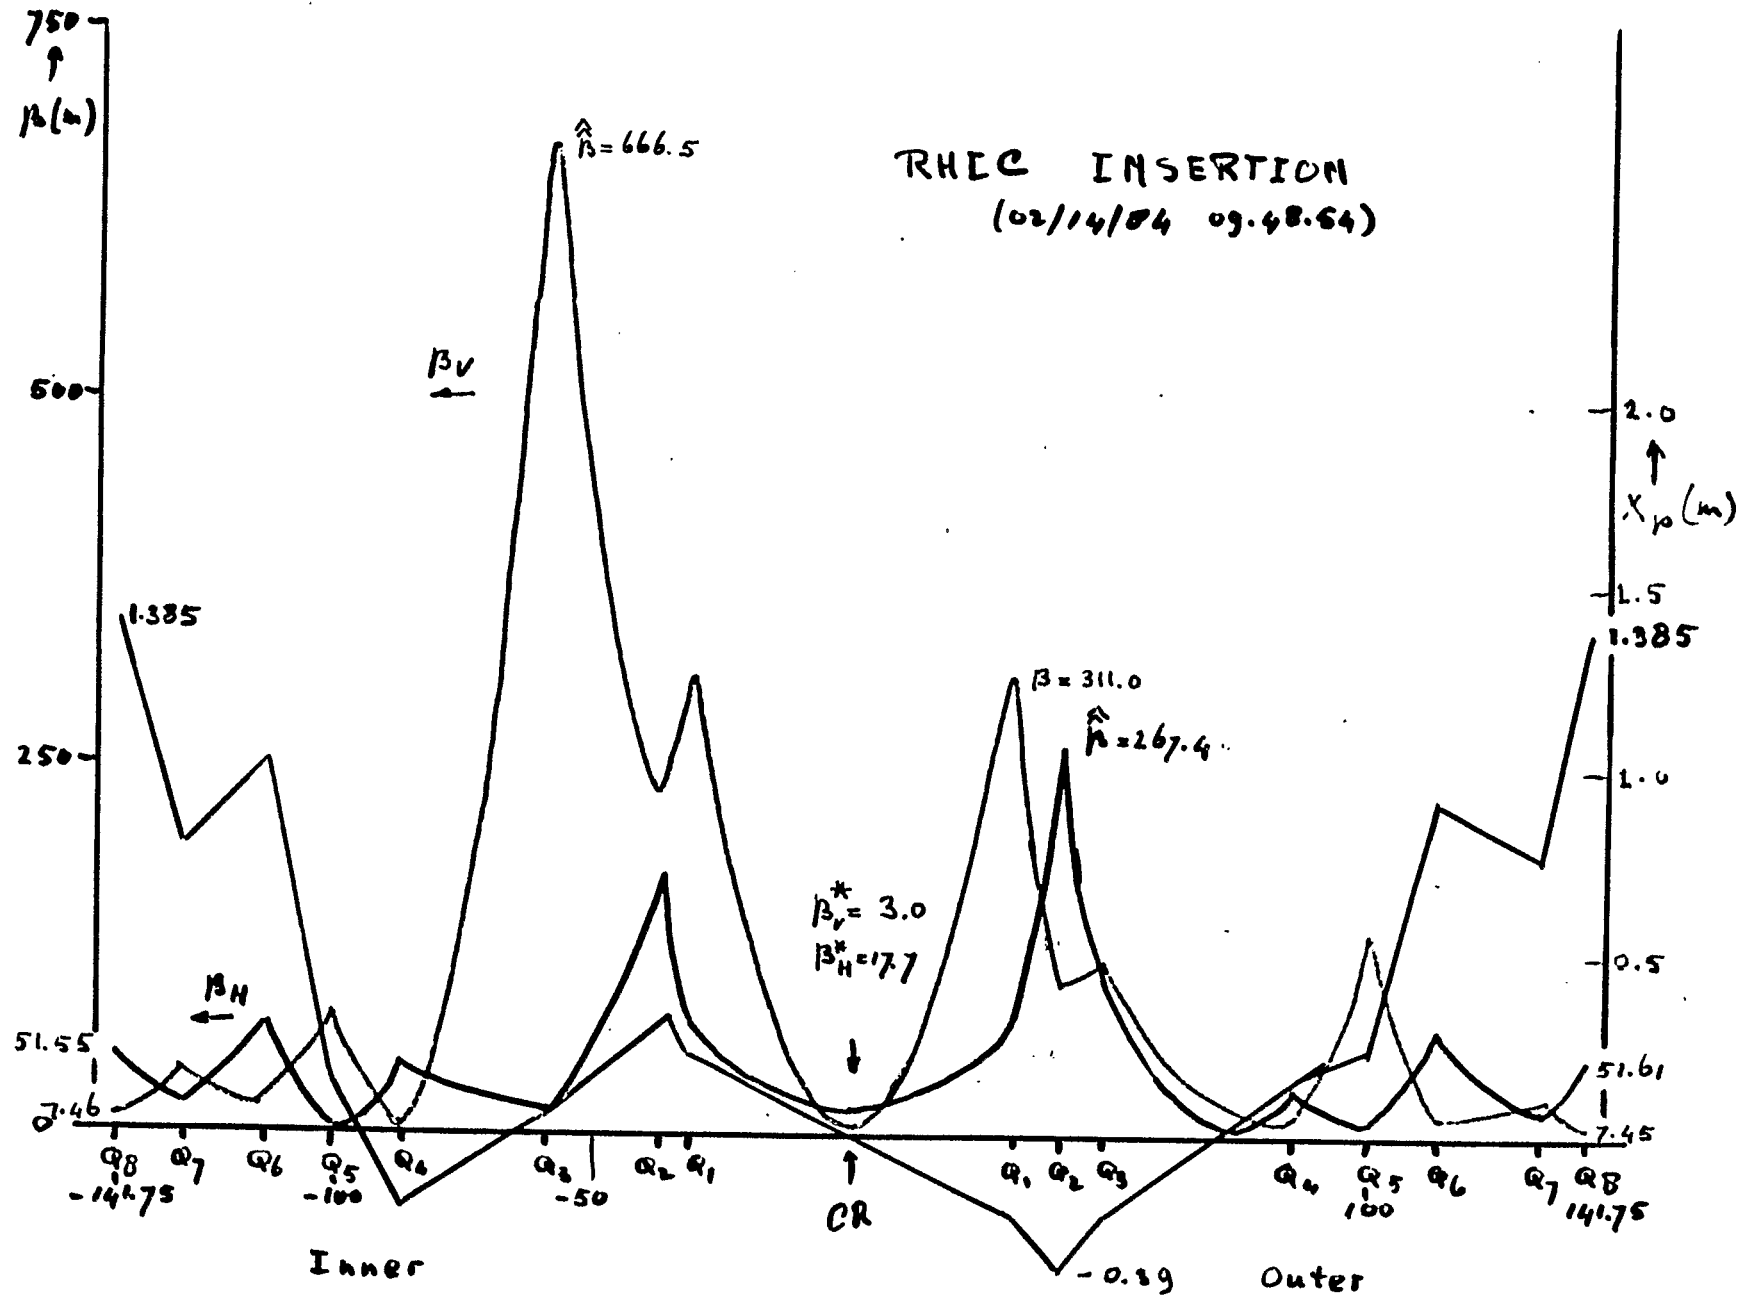

RHIC LATTICE


General Parameters (02/14/84 09.48.54)

Circumference (m)	3833.845
Number of Sextants	6
Number of Insertions	6
Number of cells / Arc	12
Mean Radius of Arc (m)	391.23
Deflection angle / Arc (rad)	0.9324
Arc length (m)	355.46
Half cell length (m)	14.811
$\hat{\beta}_H / \check{\beta}_H$ (m)	51.58 / 7.46
$\hat{\beta}_V / \check{\beta}_V$ (m)	51.58 / 7.46
\hat{x}_p / \check{x}_p (m)	1.38 / 0.64
$\Delta\psi_H / \Delta\psi_V$ (degrees)	100. / 100.
Insertion length (m)	283.509
β_H^* / β_V^* (m)	17.699 / 3.00
x_p^* (m)	0.
α_H^* / α_V^*	0 / 0.
$\hat{\beta}_H / \hat{\beta}_V$ (m)	267.4 / 666.5
D_H / D_V	31.6 / 31.6
δ_{12}	26.4

Combined Function Lattices.

The table below gives the principal characteristics of four combined function lattices. Each has a deflection angle per arc of 60° , an average radius of curvature $R \lesssim 407$ m (this will still fit inside the CBA tunnel), and a betatron phase advance of $100^\circ/\text{cell}$. The focussing structure is FOFDOO, the driftspace O between magnets is 2 m long. We vary the number of cells, thus the magnetic bending radius ρ and the magnet length LM. We also adjust the $B\rho$ value, therefore the maximum energy per atomic mass unit such that the local gap field at 7 cm from the reference orbit is about 1.95 T, at 4 cm from the reference orbit it is never more than 1.875 T. The last line gives these characteristics for the "standard" RHIC 2 lattice.

# Cells	T (GeV/AMU)	R (m)	LHC (m)	ρ (m)	B (T)	B/B (m)	LM (m)	$\Delta\psi$ (degrees)	$\hat{\beta}$ (m)	$\check{\beta}$ (m)	\hat{x}_p (m)	\check{x}_p (m)
12	73.5	406.6	17.74	360.7	1.70	3.68	15.74	100	53.89	9.53	1.70	0.89
13	70.7	406.7	16.38	357.3	1.65	4.35	14.38	100	49.57	8.82	1.45	0.76
14	67.8	407.0	15.22	353.5	1.60	5.06	13.22	100	45.87	8.22	1.25	0.65
15	65.0	406.8	14.20	349.5	1.55	5.85	12.20	100	42.63	7.69	1.08	0.57
12	100	381.2	14.81	275.4	3.03		10.7	100	51.58	7.45	1.39	0.64

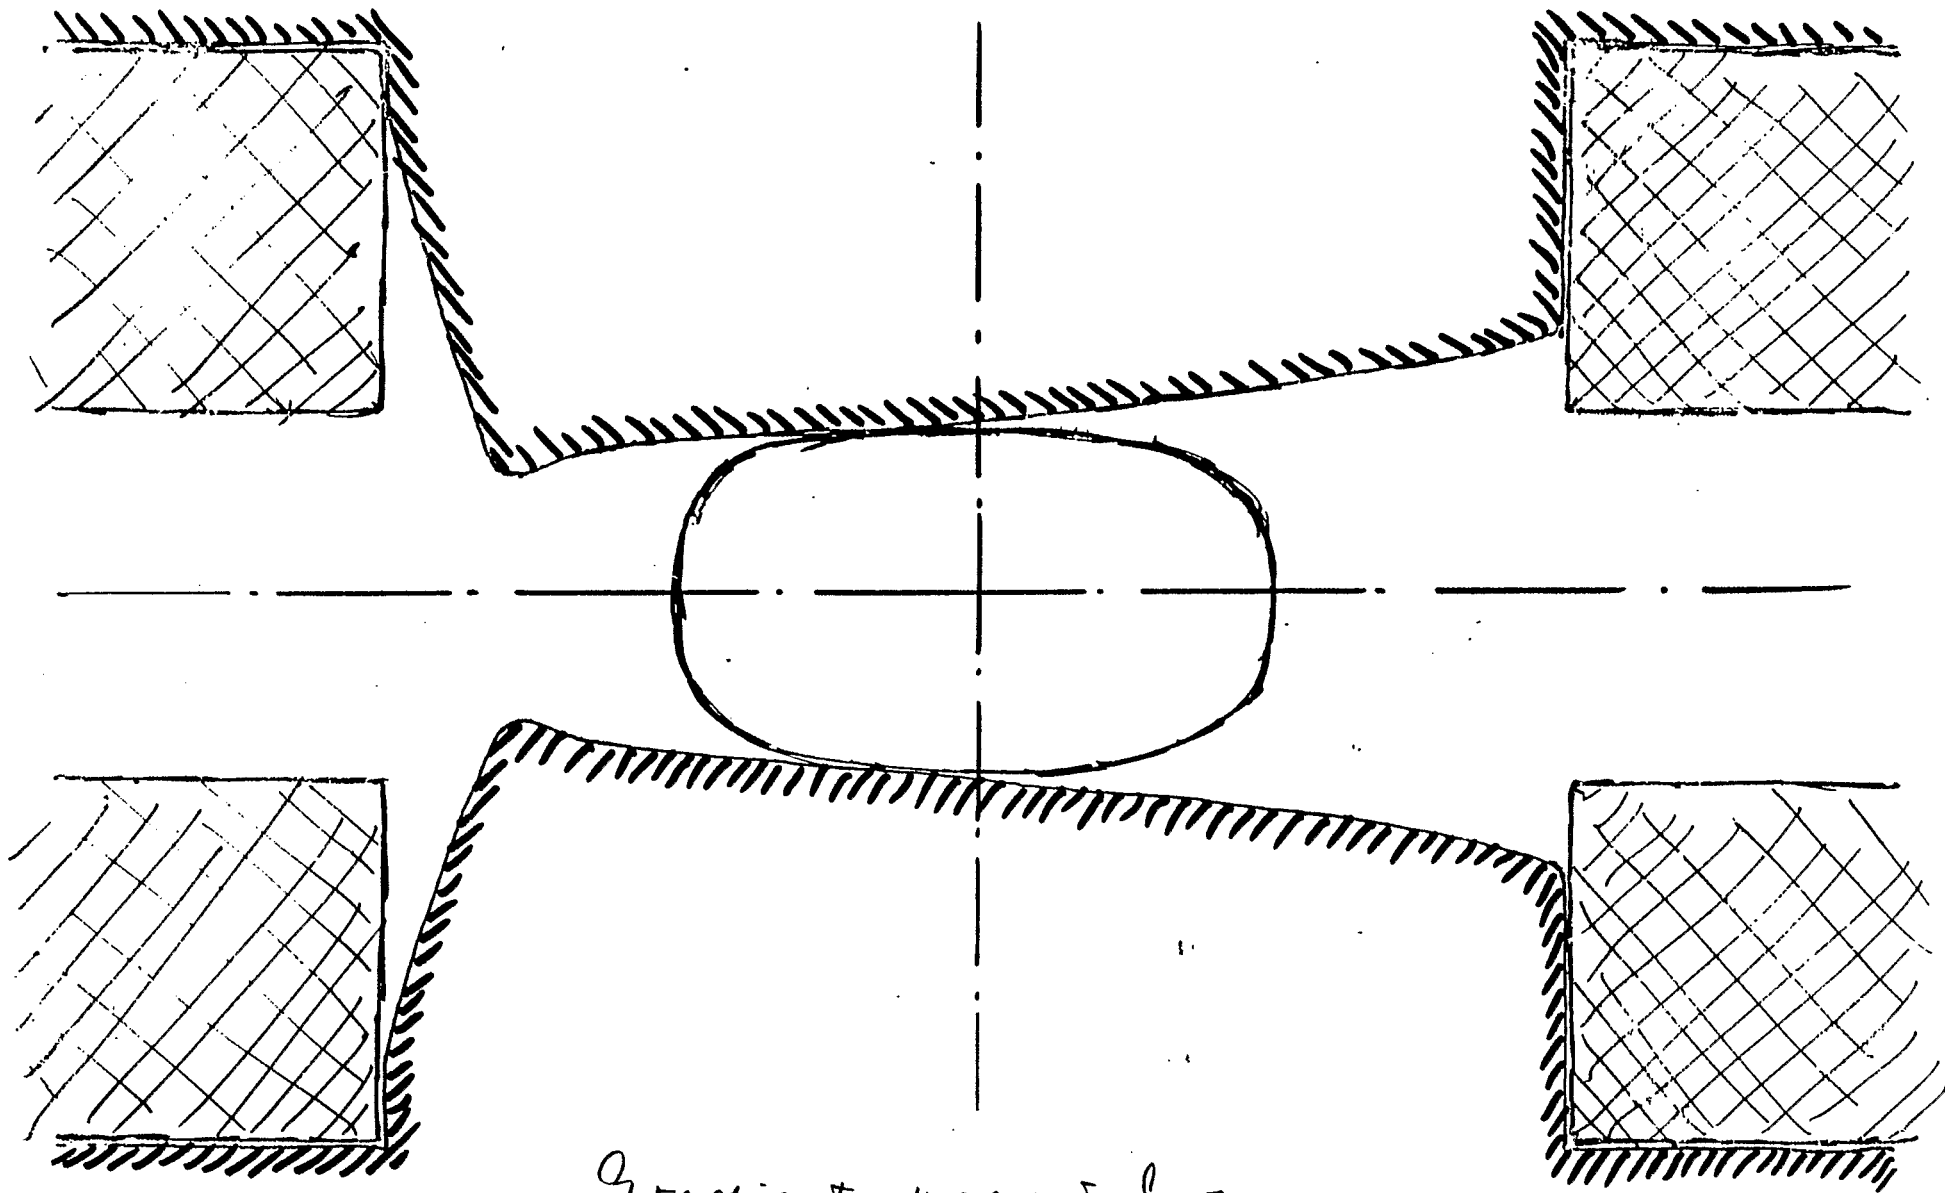

Gradient magnet for
combined function RHIC.