

Dose estimate for zero-degree calorimeters

A. J. Stevens

December 1997

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

BROOKHAVEN NATIONAL LABORATORY

December 1997

RHIC DETECTOR NOTE

RHIC/DET Note 25

Dose Estimate for Zero-Degree Calorimeters

Alan J. Stevens

**Brookhaven National Laboratory
Upton, NY 11973**

Dose Estimate for Zero-Degree Calorimeters

I. Geometry/Description of Calculations

One issue associated with the proposed Zero-Degree calorimeters (ZCAL) is possible radiation damage to the scintillator fibers. This note describes calculations of energy deposition density (dose) using the CASIM¹ Monte Carlo code.

A crude sketch of the geometry in an IR is shown in Fig. 1 below. The ZCAL modules are approximated by rectangular blocks of tungsten 10 cm. by 10 cm. by 75 cm. The front face of a module is 18m from the crossing point. Each ZCAL module is considered to have three sources of dose: (1) neutrons from electromagnetic dissociation (ED - the signal of interest for ZCAL), (2) beam-gas interactions, and (3) beam-beam interactions. The ED dose was calculated using the standard CASIM whereas the other components were calculated using VENUS events² and a modified version of CASIM previously described.³

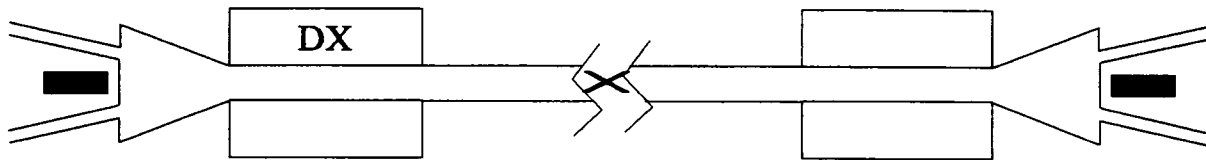


Fig. 1. Sketch Indicating two ZCAL modules (dark objects) at an IR.

In the case of the ED interaction, the geometry was not that shown in Fig. 1, but simply a tungsten block illuminated by a source of 100 GeV neutrons 18m away. The parameter critical to the maximum energy deposition is the source divergence. Here the assumption is made that the neutrons have projected angular distributions which are Gaussian with σ of 1 mrd.⁴

For both beam-gas and beam-beam interactions, the geometry illustrated by Fig. 1 is applicable. Although in principle the result depends on the material distribution in the IR (i.e., the actual detector) any such dependence is assumed to be a second order effect; the only material between the DX magnets in the simulation is a standard (0.16 cm. thick steel) beampipe.

The location of beam-gas interactions are assumed to be confined to the "warm" sections near each IR. Two such sections exist, one of length ~ 35 m between the Q4 and Q3 magnets on either side of an IR, and the IR itself, of length ~ 18 m, ± 9 m from the crossing point between the DX magnets. Both ZCAL modules are included in the simulation where the source is in the Q4-Q3 region. Beam-gas interactions are in fact simulated by Au-proton interactions. A given VENUS event is processed many times with the point of interaction being randomly chosen.

Beam-beam interactions are simulated by minimum bias Au-Au interactions. In order to not waste computer time with soft, high p_t particles, the VENUS file was pre-processed and all particles with longitudinal momentum less than 1 GeV/c were discarded.

In the non-ED simulations, ZCAL was divided into 9 segments in the transverse directions and 5 segments in Z; thus energy deposition was binned in sub-volumes with dimension $3\frac{1}{3}$ by $3\frac{1}{3}$ by 15 cm. Additional information on approximations in the simulation are given in Ref. [3].

II. Dose Per Interaction

The maximum energy deposition density per interaction found in the CASIM simulations is shown in Table 1.

Table 1 Results of CASIM Calculations

Source	Max. Energy Dep. in GeV/g-Int
Electromagnetic Dissociation	3.68×10^{-3}
Beam-Gas Q4-Q3 (Upstream)	1.84×10^{-3}
Beam-Gas Q4-Q3 (Dnstream)	1.32×10^{-4}
Beam-Gas IR	3.16×10^{-2}
Beam-Beam	1.79×10^{-2}

In this table, the ED "interaction" assumes a single 100 GeV neutron per such interaction. The ZCAL module closest to the source in the Q4-Q3 region is called the "Upstream" ZCAL, although physically each ZCAL sees both sources, one "behind" it and one (in the other beam) on the other side of the IR.

III. Normalization/Dose per Year

In order to obtain the annual dose some normalization assumptions are required. It is important to note that the ED and Beam-Beam interactions scale by luminosity and that the beam-gas background scales by intensity. I have chosen to set the beam-gas interaction rate at a value given by Bill Christie of 0.6 interactions per cm per sec.⁵ This corresponds to design beam intensity and 10^{-9} Torr pressure. Additional parameters consistent with this interaction rate are the design luminosity of 2×10^{26} cm⁻² sec⁻¹ and a total Au-Au inelastic cross section of 6.1 barns. Finally I choose a 10^7 sec year and take 100 barns for the ED cross section.⁴

Using these assumptions, and applying the conversion of 1 rad = 6.25×10^4 GeV/g to obtain a more familiar unit of dose give the results shown in Table 2. In this table the Upstream and Dnstream components of the dose per interaction given in Table 1 have been combined.

The error on the ~ 20 krad/year estimate is not entirely clear. Only about 75 different events on the VENUS files were processed (each many times as mentioned above) which gives a

statistical error of $\sim 12\%$. The systematic error inherent in the physics approximations made likely swamps this so that the 20 krads/year estimate should not be regarded as more accurate than a factor of two.

Table 2 Dose/yr. with Assumptions in Text

Source	krads/year
Electromagnetic Dissociation	11.8
Beam-Gas (Q4-Q3)	0.7
Beam-Gas (IR)	5.5
Beam-Beam	3.5
Total:	21.5

References/Footnotes

1. A. Van Ginneken, "CASIM; Program to Simulate Hadron Cascades in Bulk Matter," Fermilab FN-272 (1975).
2. VENUS 4.12. Some of the "spectators" produced by VENUS form ions. Ron Longacre employed the FAI fragmentation model with some "tuning" to NA49 data. The set of possible ion fragments was restricted to those known to the GEANT code.
3. A.J. Stevens, "Estimate of Beam-Gas Background Rates from Upstream Source Locations in a Simple Detector," RHIC/DET Note 22 (1996).
4. S. White, private communication.
5. W. Christie, Viewgraphs in "2nd Workshop Machine Backgrounds at RHIC," S. White Ed. (1996).