

## Scenario For The Case Of No RF Stacking

A. G. Ruggiero

December 1983

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

SCENARIO FOR THE CASE OF NO RF STACKING

A. G. RUGGIERO

(BNL, December 5, 1983)

Scenario for the case  
of no RF stacking

A.G. Ruggiero

(BNL - Dec. 5, 1983)

## Formulae

Luminosity :

$$L = \frac{N^2 B f_{rev}}{4\pi \sigma_v^* \sigma_H^* f}$$

Beam-Beam Tune-Shift :

$$\Delta\nu = \frac{N r_0 \beta_v^* Z^2}{4\pi \sigma_v^* \sigma_H^* f \gamma A}$$

$f$ , correction factor =  $\sqrt{1 + \rho^2}$

$$\rho = \frac{\alpha \sigma_e}{2\sigma_H^*}$$

## General Parameters

Circumference, $2\pi R$	3833.8 m
Revolution Frequency, $f_{rev}$	78.194 kHz
Element:	Gold (Au)
$A$ , atomic mass	197
$Z$ , atomic number	79
Kinetic Energy	100 GeV/A
Rest Energy	0.9381 GeV/A
$\gamma$	107.60
$\beta$	0.999957
Rigidity, $B\rho$	839.72 T·m
Momentum	100.93 GeV/c/A
No. of AGS pulses / Ring	57 box-car
No. of bunches / AGS pulse	1
No. of ions / AGS bunch	$1.87 \times 10^9$
Total No. of ions / Ring	$1.07 \times 10^{11}$
AGS Cycle Time	2.0 sec
Filling Time	2 rings $\times$ 2 min

AGS Bunch Area at Transfer  
Normalized Emittance,  $H$  and  $V$   
Emittance @ 100 GeV/A  
(95% of beam population)

0.1 eV/A-sec  
10.  $\pi$  mm-mrad

0.1  $\pi$  mm-mrad

RF Harmonic Number,  $h$

171

RF Frequency,  $f_{RF}$

13.37 MHz

Transition Energy,  $E_T$

35

Average Beam Current, particle  
electric

1.34 mA

0.106 Amp

Regular Cell, average  $\beta$ -value  
average  $\eta$ -value

30. m

0.5 m

no special magnet

septum magnet

common magnet

	no special magnet	septum magnet	common magnet
Crossing Angle, $\alpha$ mrad	8.	2.	0.
No. of Bunches/Beam, B	171	171	57
No. of Ions/Bunch, N	$6.24 \times 10^8$	$6.24 \times 10^8$	$1.87 \times 10^9$
Rms Bunch Length, $\sigma_e$ , cm	15.	15.	90.
Rms Energy Spread, $\sigma_E/E$	$1. \times 10^{-3}$	$1. \times 10^{-3}$	$.3 \times 10^{-3}$
Bunch Area, eV/A-sec	0.625	0.625	1.125
RF Voltage, kV	200	200	100
$\beta_v^*$ m	2.0	2.0	1.0
$\beta_H^*$ m	32	2.0	1.0
$\sigma_v^*$ cm	0.0183	0.0183	0.013
$\sigma_H^*$ cm	0.073	0.0183	0.013
$p = \alpha \sigma_e / 2\sigma_H^*$	0.82	0.82	0.
$f = \sqrt{1+p^2}$	1.2932	1.2932	1.
rms Interaction length, cm	7.5	7.5	45.
Luminosity, $\text{cm}^{-2} \text{s}^{-1}$	$0.25 \times 10^{27}$	$1.0 \times 10^{27}$	$0.8 \times 10^{28}$
Beam-Beam Tune Shift, $\Delta \nu$	0.0003	0.0012	0.0047
Peak Current, particle, mA	80.	80.	40.
electric, Amp	6.3	6.3	3.15
$ Z/n $ allowable, ohm	114	114	20.5
Initial Luminosity Loss Rate, $\text{h}^{-1}$	0.732	0.732	0.945




## Lattice :

### Regular Cells :

No. of Regular Cells	96
Length (Full)	24.514 m
Phase Advance (Full)	125.2°
$\beta_{max}$	56.6 m
$\beta_{min}$	3.4 m
$\eta_{max}$	0.722 m
$\eta_{min}$	0.278 m
Bending Angle / Half Cell	32.151 mrad
Contribution to $\beta$ -Tune	32.
$B' \times l_q$	121.65 Tesla
Quadrupole Gradient, $B'$	6.1 KG/cm
Quadrupole Length, $l_q$	2.0 m
Dipole length, $l_B$	8.257 m
Dipole Field	3.27 Tesla
Sagitta	3.3 cm
Bending Radius, $\rho$	256.8 m
Drift between dipole and quad	1.0 m

# Half-Regular Cell

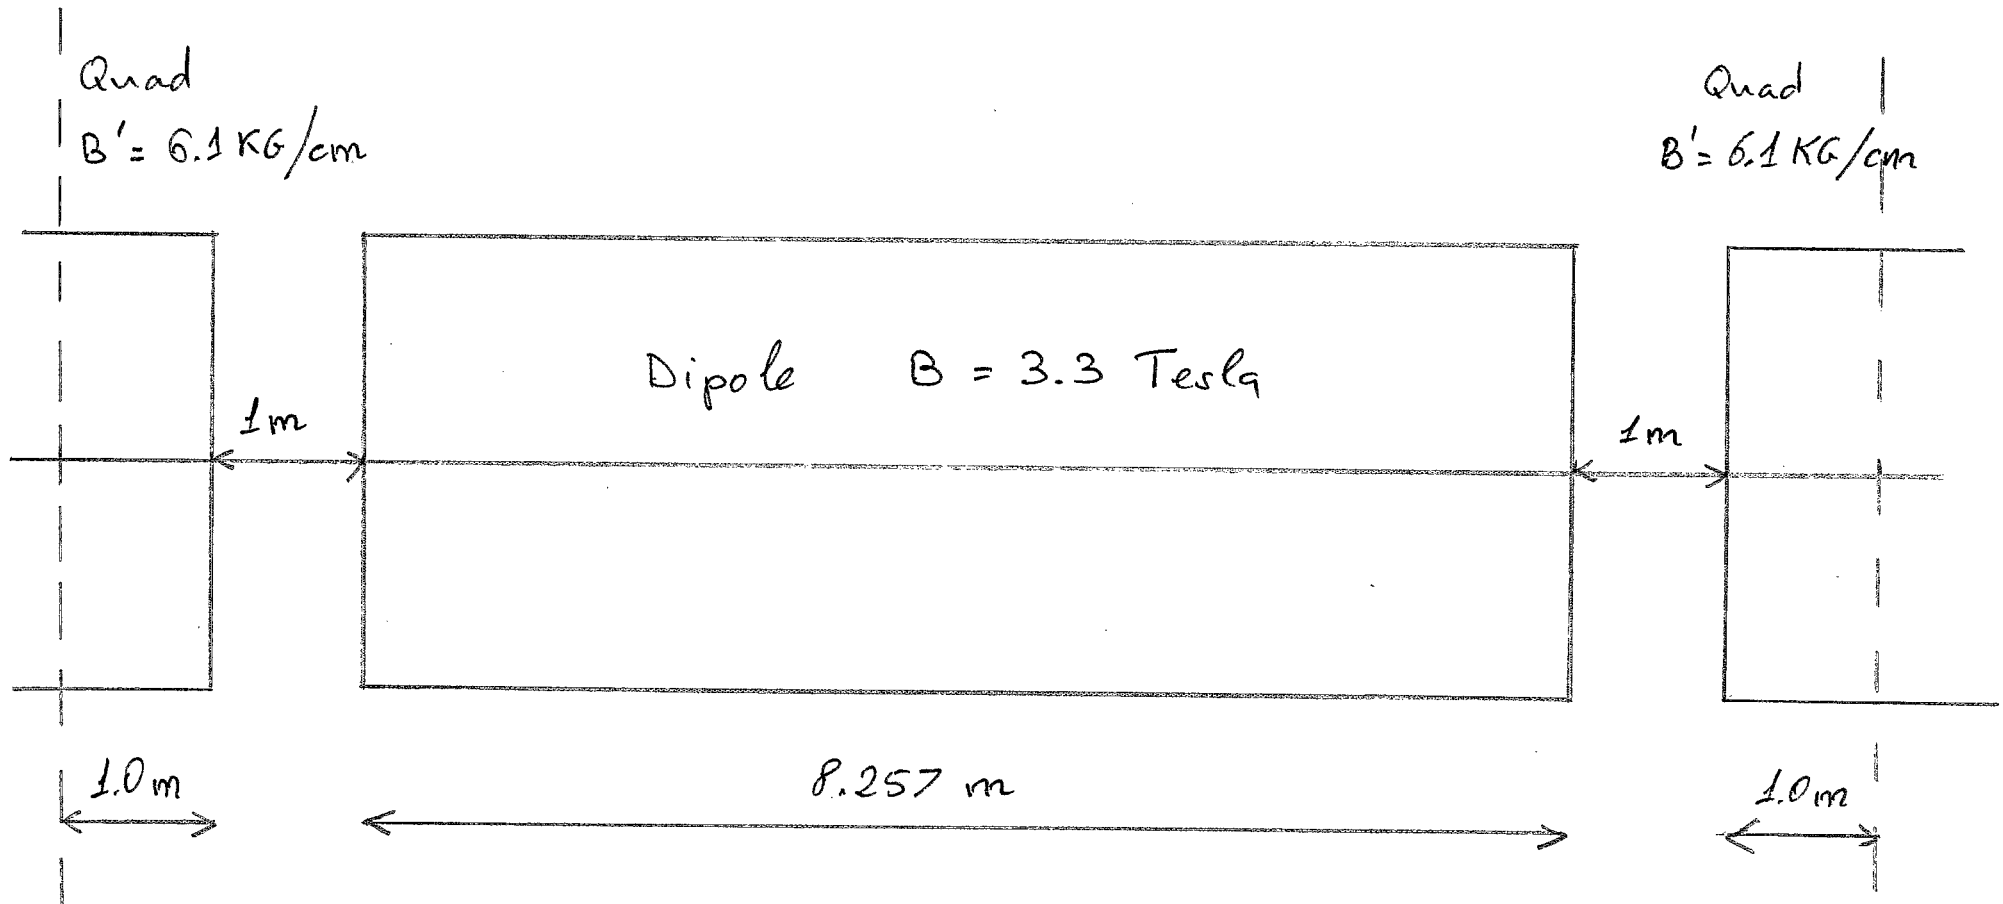

No. of Dipoles / Ring = 192

No. of Quads / Ring = 192

Special Dipoles and Quads not included

## Beam Size (Max.)

Energy	Height ( $\pm 2.5\sigma$ )	Width ( $\pm 2.5\sigma$ )
100 GeV/A	$\pm 2.4$ mm	$\pm 3.0 / 4.2$ mm
12	6.6	6.8 / 8.4
5	9.7	9.9 / 11.5

Circular Vacuum Chambers  
with i.d.

6.0 cm

Requirement on Good Field  
Region :

@ 5 GeV/A

$\pm 2.5$  cm

100 GeV/A

$\pm 1.0$  cm

$$\sigma_E/E = 10^{-3}$$

$$\gamma = 100$$
$$I = 1 \text{ A-electric}$$

Gold

# 57

$E_N$	$\chi_E^{-1}$	$\chi_H^{-1}$	$\chi_V^{-1}$
$5 \pi \text{ mm.mrad}$	$.1538 \text{ h}^{-1}$	$.2523 \text{ h}^{-1}$	$-.0554 \text{ h}^{-1}$
$\rho$	$.1007$	$.1032$	$-.0227$
10	$.0816$	$.0669$	$-.0147$
12	$.0684$	$.0467$	$-.0103$

$$E_N = 10 \pi \text{ mm.mrad}$$

$\sigma_E/E$	$\chi_E^{-1}$	$\chi_H^{-1}$	$\chi_V^{-1}$
$0.5 \times 10^{-3}$	$.5415 \text{ h}^{-1}$	$.1110 \text{ h}^{-1}$	$-.0244 \text{ h}^{-1}$
0.8	$.1547$	$.0812$	$-.0178$
1.0	$.0816$	$.0669$	$-.0147$
1.2	$.0474$	$.0560$	$-.0123$

Comparison of Diffusion Rates vs. normalized emittance  $E_N$  and rms energy spread  $\sigma_E/E$

# Comparison of Diffusion Rates with Lattice Choice

$\bar{\beta}$	m	25	30	35	40		
$\bar{\eta}$	m	.5	.5	.5	.5	←	
case #		46	57	68	79		
$\alpha_E^{-1}$	$h^{-1}$	.0964	.0816	.070	.0607		
$\alpha_H^{-1}$	$h^{-1}$	.1012	.0659	.0453	.0307		
$\alpha_V^{-1}$	$h^{-1}$	-.0145	-.0147	-.0147	-.0146		
$\bar{\beta}$	m	25	30	35	40		
$\bar{\eta}$	m	1.0	1.0	1.0	1.0	←	
case #		47	58	69	80		
$\alpha_E^{-1}$	$h^{-1}$	.0837	.0744	.0665	.0596		
$\alpha_H^{-1}$	$h^{-1}$	.3891	.2842	.2139	.1646		
$\alpha_V^{-1}$	$h^{-1}$	-.0126	-.0134	-.0140	-.0143		
$\sigma_E/E = 10^{-3}$				$\gamma = 100$			
$E_N = 10 \pi \text{ mm. mrad}$							
Gold				$I = 1.0 \text{ Amp-electric}$			

AL-0049-80  
2 X 2 INCHES  
GRAPHIC

"GOLD"

$\gamma = 100$

$I = 1 \text{ Amp - electric}$

$\bar{\beta} = 30 \text{ m}$


$\bar{r} = 0.5 \text{ m}$

$\sigma_s/\epsilon = 10^{-3}$

$\tau = 1$   
/hour

$\tau = 1$


$\tau = 1$   
H

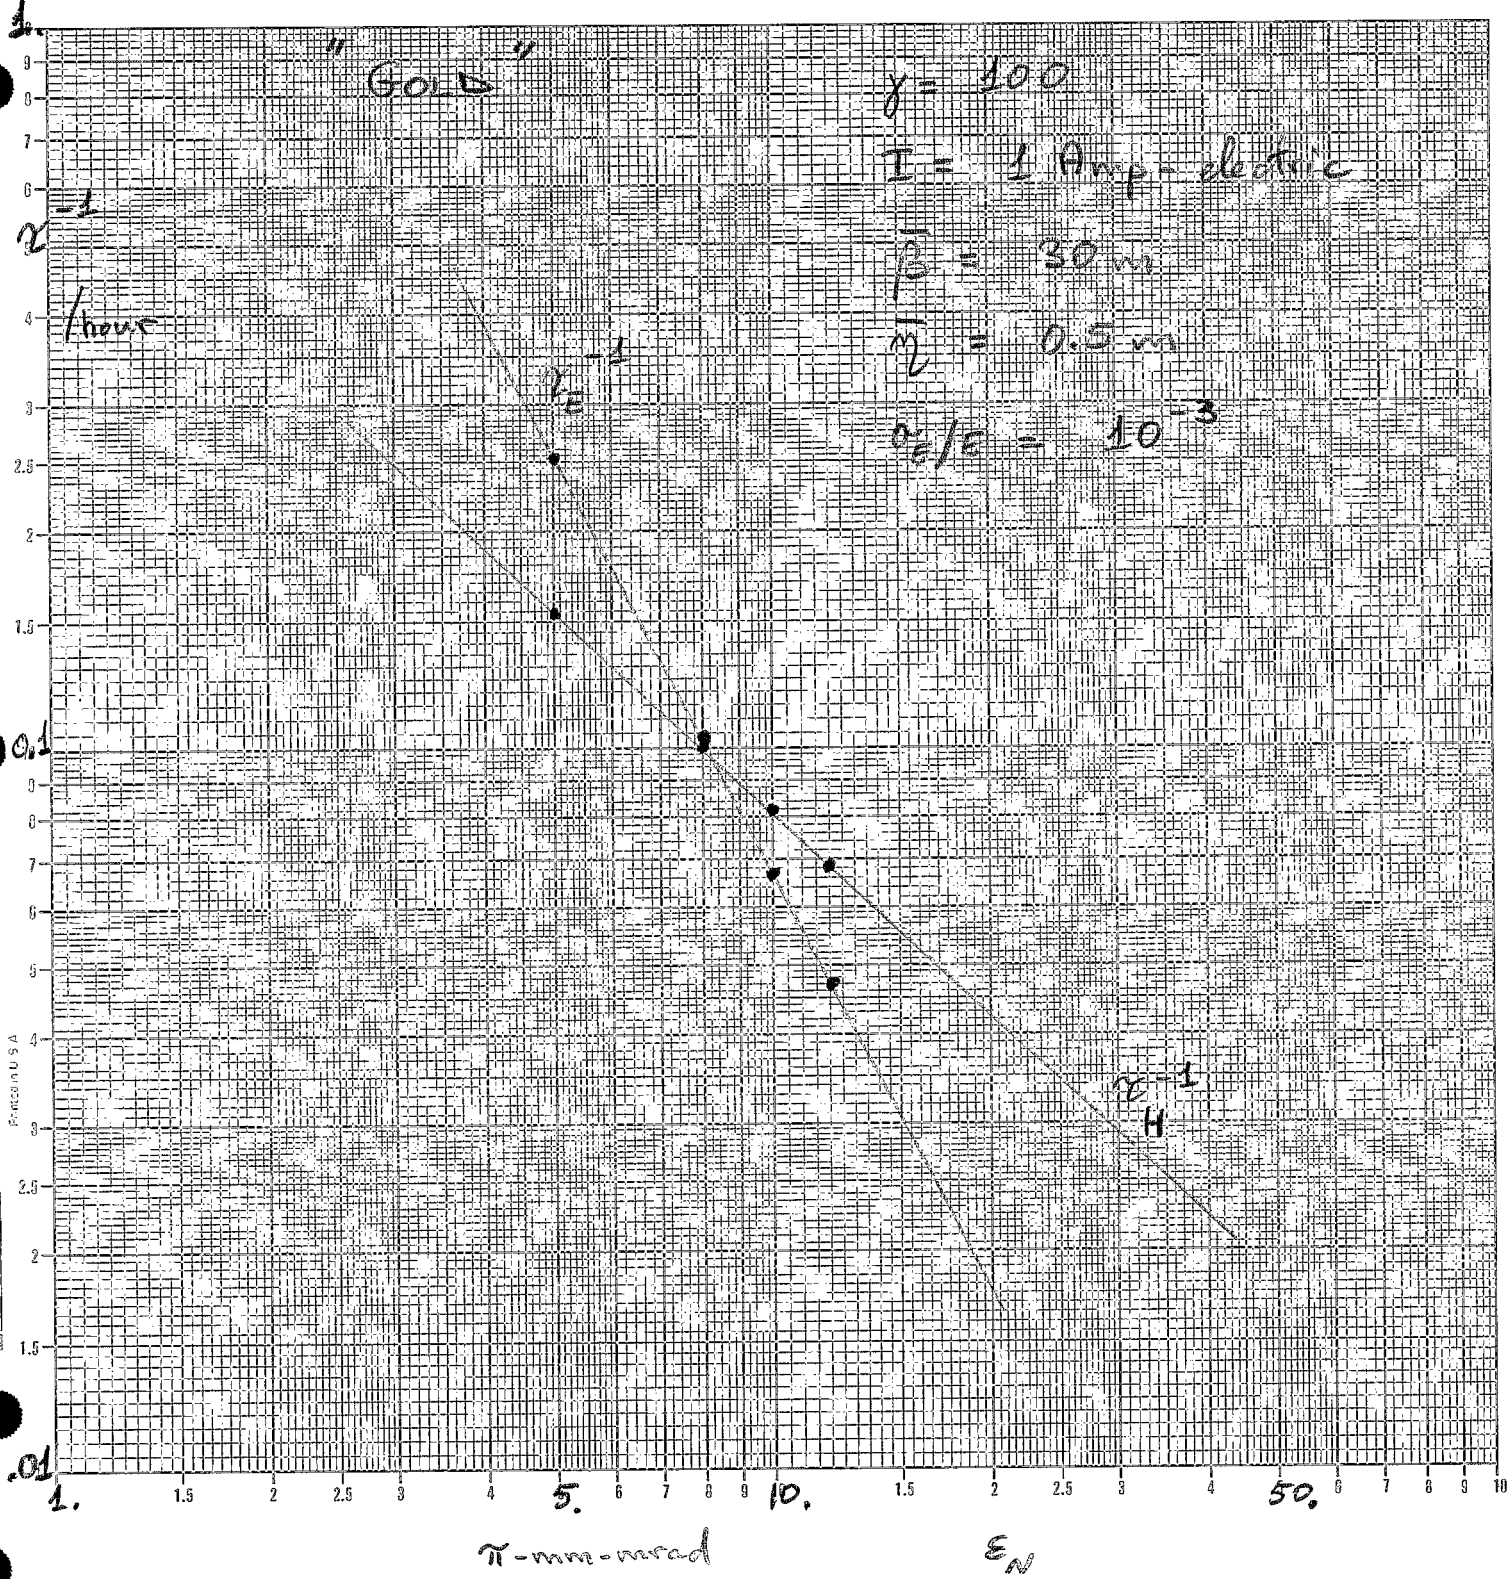

$\pi$ -mm-mrad

$\epsilon_N$

GRAPHIC CONTROLS CORPORATION Buffalo, New York  
2 x 2 CYCLES M-0500-80

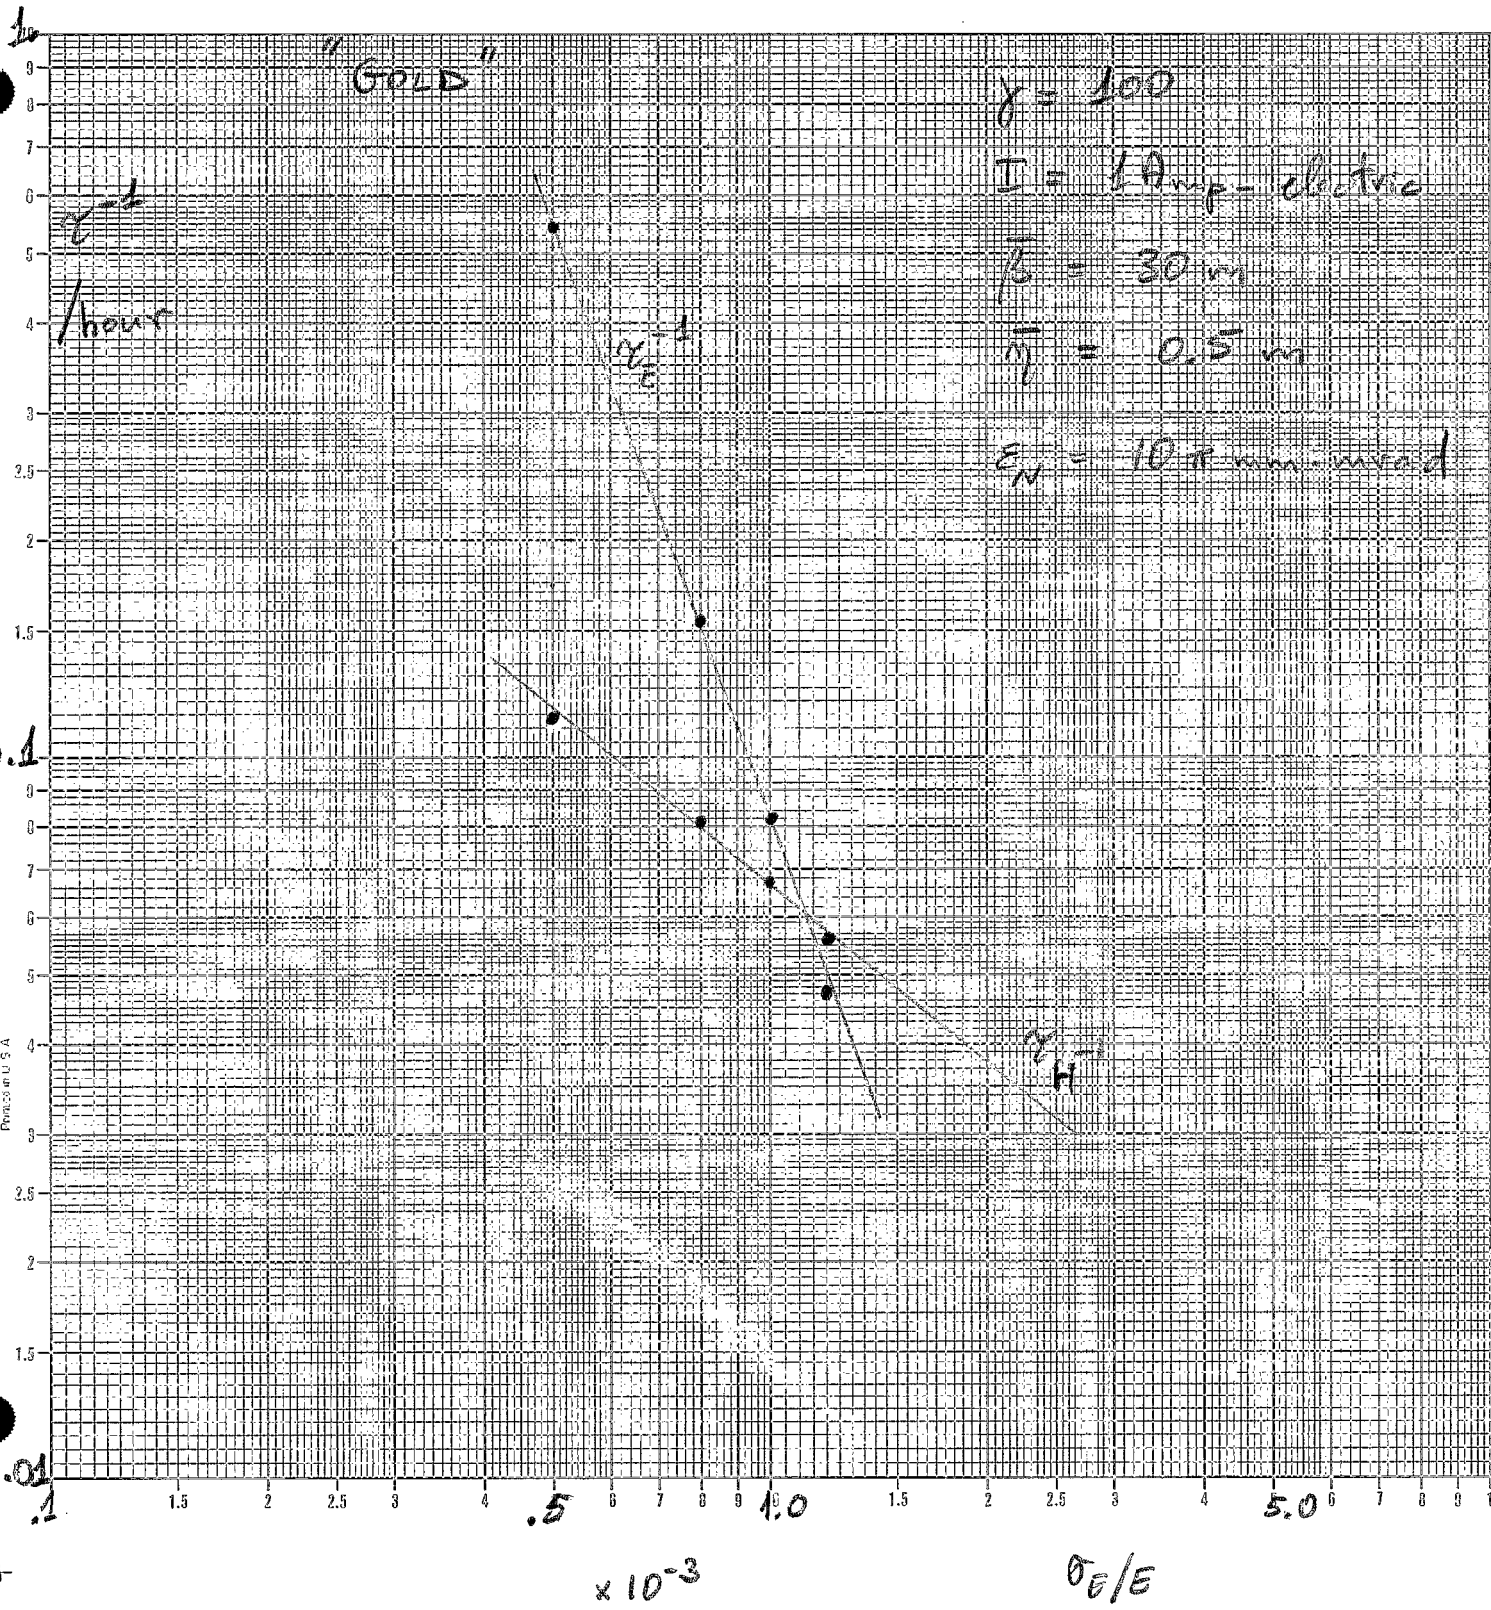

$$\sigma_E/E = 10^{-3}$$

$$E_N = 10 \pi \text{ mm} \cdot \text{mrad}$$

Gold

$$I = 1 \text{ Amp} \cdot \text{electric}$$

$\gamma$	$\chi_E^{-1}$	$\chi_H^{-1}$	$\chi_V^{-1}$
5	-3.7099 $h^{-1}$	12.904 $h^{-1}$	13.0858 $h^{-1}$
10	-0.6270	1.0605	1.1229
12	-0.315	0.4332	0.4709
20	0.0911	-0.0637	-.0818
40	0.1614	-0.0081	-0.0726
60	0.1293	0.0388	-0.0388
80	0.1017	0.0585	-0.0229
100	0.0816	0.0669	-0.0147

Comparison of Diffusion Rates vs.  $\gamma$ -



$$\bar{m} = 0$$

$$r = 100$$

Gold

$$\sigma_E/E = 10^{-3}$$

$$\epsilon_N = 10\pi \text{ mm} \cdot \text{mrad}$$

$$I = 1 \text{ A electric}$$

$\bar{\beta}$		$\tau_E^{-1}$	$\tau_H^{-1}$ ( $= \tau_V^{-1}$ )
1.	m	1.1403 h <sup>-1</sup>	-.0068 h <sup>-1</sup>
2		.7361	-.0088
3		.5624	-.0101
5		.3926	-.0118
70		.0258	-.0108
100		.0123	-.0074
200		-.0028	.0034
300		-.0069	.0125
500		-.0090	.0270
700		-.0091	.0384
1000		-.0087	.0520

# Initial luminosity loss Rates

$$\tau_L^{-1} = \frac{P^2}{f^2} \tau_E^{-1} + \left(2 - \frac{P^2}{f^2}\right) (\tau_H^{-1} + \tau_V^{-1})$$

Gold,  $\gamma = 100$ , # 57,  $I = 1$  Amp-electric

$$\sigma_E/E = 1 \times 10^{-3}$$

$\epsilon_N$	$p = 0.82$ ↓ $\tau_L^{-1}$	$p = 0$ ↓ $\tau_L^{-1}$
5 $\pi$ mm.mrad	.3765 $h^{-1}$	.3938 $h^{-1}$
8	.1691	.1610
10	.1162	.1044
12	.0857	.0728

$$\epsilon_N = 10 \pi \text{ mm.mrad}$$

$\sigma_E/E$	$\tau_L^{-1}$	
0.5 $\times 10^{-3}$	.3561 $h^{-1}$	.1732 $h^{-1}$
0.8	.1635	.1268
1.0	.1162	.1044
1.2	.0889	.0874