

RHIC Performance With Intrabeam Scattering

G. Parzen

April 1984

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

RHIC-PG-49

RHIC PERFORMANCE
WITH INTRABEAM SCATTERING

G. Parzan

BNL - April 16, 1984

RHIC Performance

RHIC3

4/16/84

t = 10 hrs

$X_p = 1.39$

$N_b = 1.2 \times 10^9$

$\beta_x = 51.4$

$v = 1.2 \times 10^6$

γ	5	12	20	30	50	75	100	δt
$\delta_0 / 10^{-3}, t=0$.818	.678	.696	1.261	.643	.452	.359	
$\sigma_{z0}, t=0$	128.	63.3	36.9	45.2	53.2	50.5	47.7	
$\epsilon / 10^{-6}, t=10$	89.0	44.5	35.8	33.2	27.7	27.8	27.8	
$\epsilon / 10^{-3}, t=10$	1.411	1.563	1.792	1.985	1.548	1.274	1.099	
$\sigma_{z0}, t=10$	221.	146.	95.0	71.7	128.	142.	146.	
Av. Lum./ L_0	.162	.319	.389	.422	.476	.471	.470	
RF								
$2.5 \epsilon / 10^{-3}$	3.53	3.91	4.48	4.96	3.87	3.18	2.74	
$\Delta P/P \text{ buckle} / 10^{-3}$	2.28	3.82	6.72	9.95	4.31	3.19	2.68	
Aperture								
$X_p \epsilon$ (mm)	1.96	2.17	2.49	2.76	2.15	1.77	1.53	
$\sigma_H = \sigma_V$ (mm)	12.4	5.64	3.92	3.08	2.18	1.78	1.54	
$2.5 X_p \epsilon$	4.90	5.42	6.22	6.90	5.38	4.42	3.82	
$2.5 \sigma_H$	31.0	14.1	9.80	7.70	5.45	4.45	3.83	
Beam Half Width								
$2.5 (\sigma_H + X_p \epsilon)$	35.1	19.1	15.7	14.3	10.6	8.70	7.52	
$2.5 \sigma_V$	31.0	14.1	9.80	7.70	5.45	4.45	3.83	
Physical Half-Aperture								
$2.5 X_p \epsilon + 6 \sigma_H$	78.9	39.1	29.6	25.2	18.3	15.0	13.0	
$6 \sigma_V$	74.4	33.8	23.5	18.5	13.1	10.7	9.24	
Av. Lum./ $L_0, t=7.5$.150	.299	.368	.401	.457	.452	.452	
Luminosity/ 10^{26}	.100	.475	.965	1.57	2.95	4.38	5.83	
Luminosity = $12.4 \times 10^{26} \times \text{LUMAV} \times \delta / 100$								

RHIC Performance

RHIC3


4/17/84

t=2 hrs


$X_p =$

$P_x =$


γ	5	12	20	30	50	75	100	δt
$\delta_0 / 10^{-3}, t=0$.818	.678	.696	1.261	.643	.452	.359	
$\sigma_{z0}, t=0$	128.	63.3	36.9	45.2	53.2	50.5	47.7	
$\epsilon / 10^{-6}, t=2$	54.2	27.4	22.4	20.4	18.3	18.5	18.7	
$\delta / 10^{-3}, t=2$	1.104	1.230	1.414	1.604	1.180	.951	.817	
$\sigma_z, t=2$	173.	115.	75.0	57.5	97.7	106.	109.	
Av. Lum./ L_0	.267	.506	.596	.645	.677	.665	.663	
RF								
$2.5 \delta / 10^{-3}$	2.76	3.08	3.54	4.01	2.95	2.38	2.04	
$\Delta P/P \text{ bucke} / 10^{-3}$	2.28	3.82	6.72	9.95	4.31	3.19	2.68	
Aperture								
$X_p \delta$ (mm)	1.53	1.71	1.97	2.23	1.64	1.32	1.14	
$\sigma_H = \sigma_V$ (mm)	9.64	4.42	3.09	2.91	1.77	1.45	1.26	
$2.5 X_p \delta$	3.82	4.28	4.92	5.58	4.10	3.30	2.85	
$2.5 \sigma_H$	24.1	11.0	7.72	6.02	4.42	3.62	3.15	
Beam Half Width								
$2.5 (\sigma_H + X_p \delta)$	27.4	15.0	12.4	11.4	8.36	6.80	5.88	
$2.5 \sigma_V$	24.1	11.0	7.72	6.02	4.42	3.62	3.15	
Physical Half-Aperture								
$2.5 X_p \delta + 6 \sigma_H$	61.6	30.7	23.4	19.9	14.6	12.0	10.4	
$6 \sigma_V$	57.8	26.5	18.5	14.5	10.6	8.70	7.57	
Av. Lum/ $L_0, t=7.5$.224	.442	.534	.588	.623	.611	.612	
Luminosity/ 10^2	.165	.753	1.48	2.40	4.20	6.18	8.22	

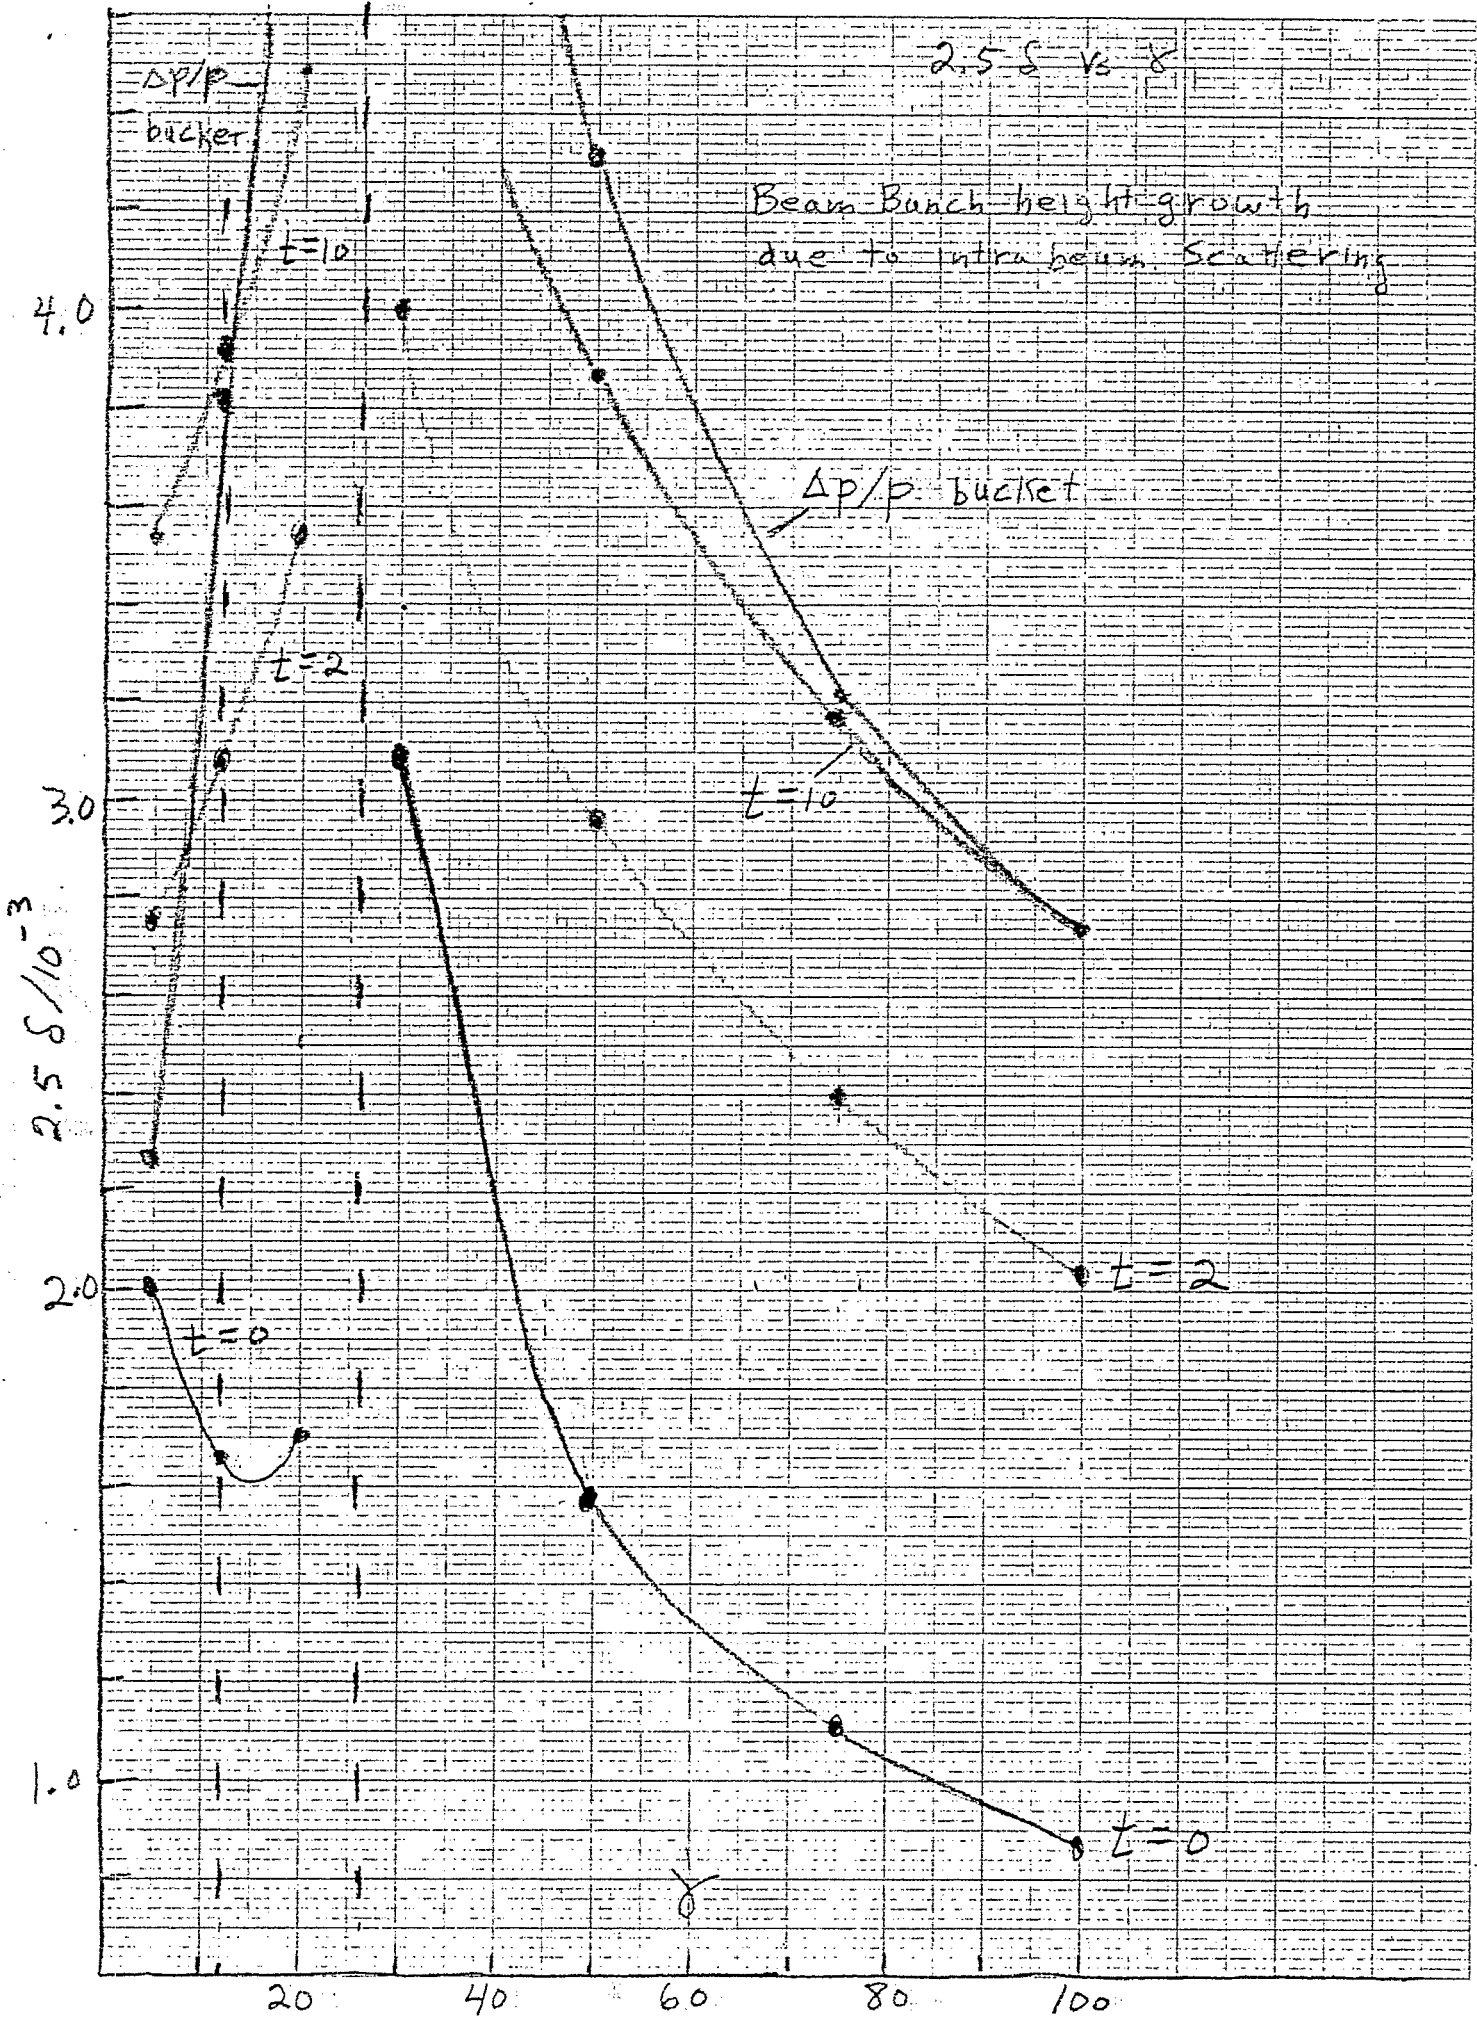

GRAPHIC CENTER, CORPORATION
Rochester, New York Printed in U.S.A.
GRAPHIC PAPER
SQUARE 10 x 10 TO THE INCH WITH
M. 1013 60

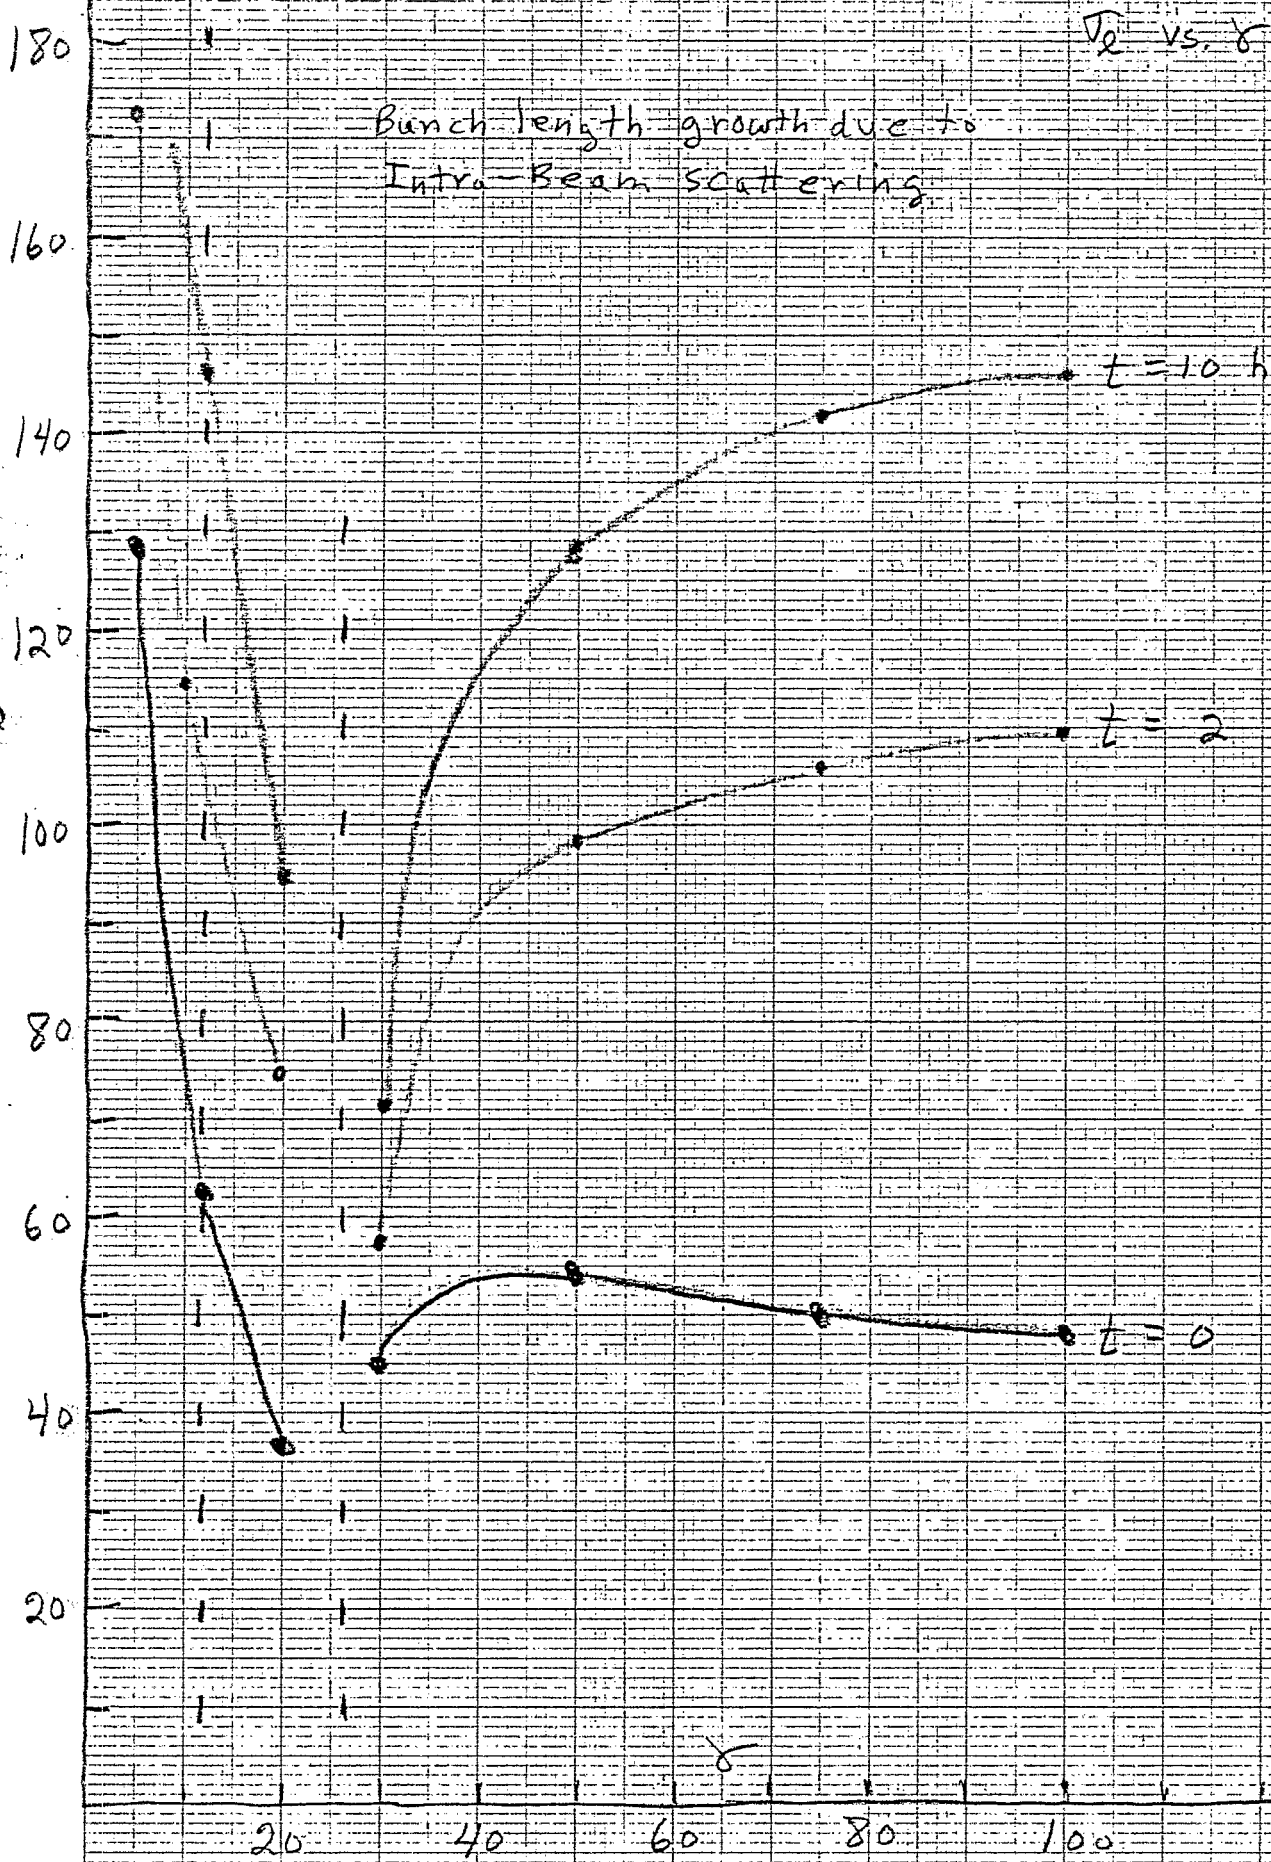

GRAPHIC CONTROL CORPORATION
New York, New York Printed in U.S.A.
GRAPHIC PAPER
SQUARE
01/13

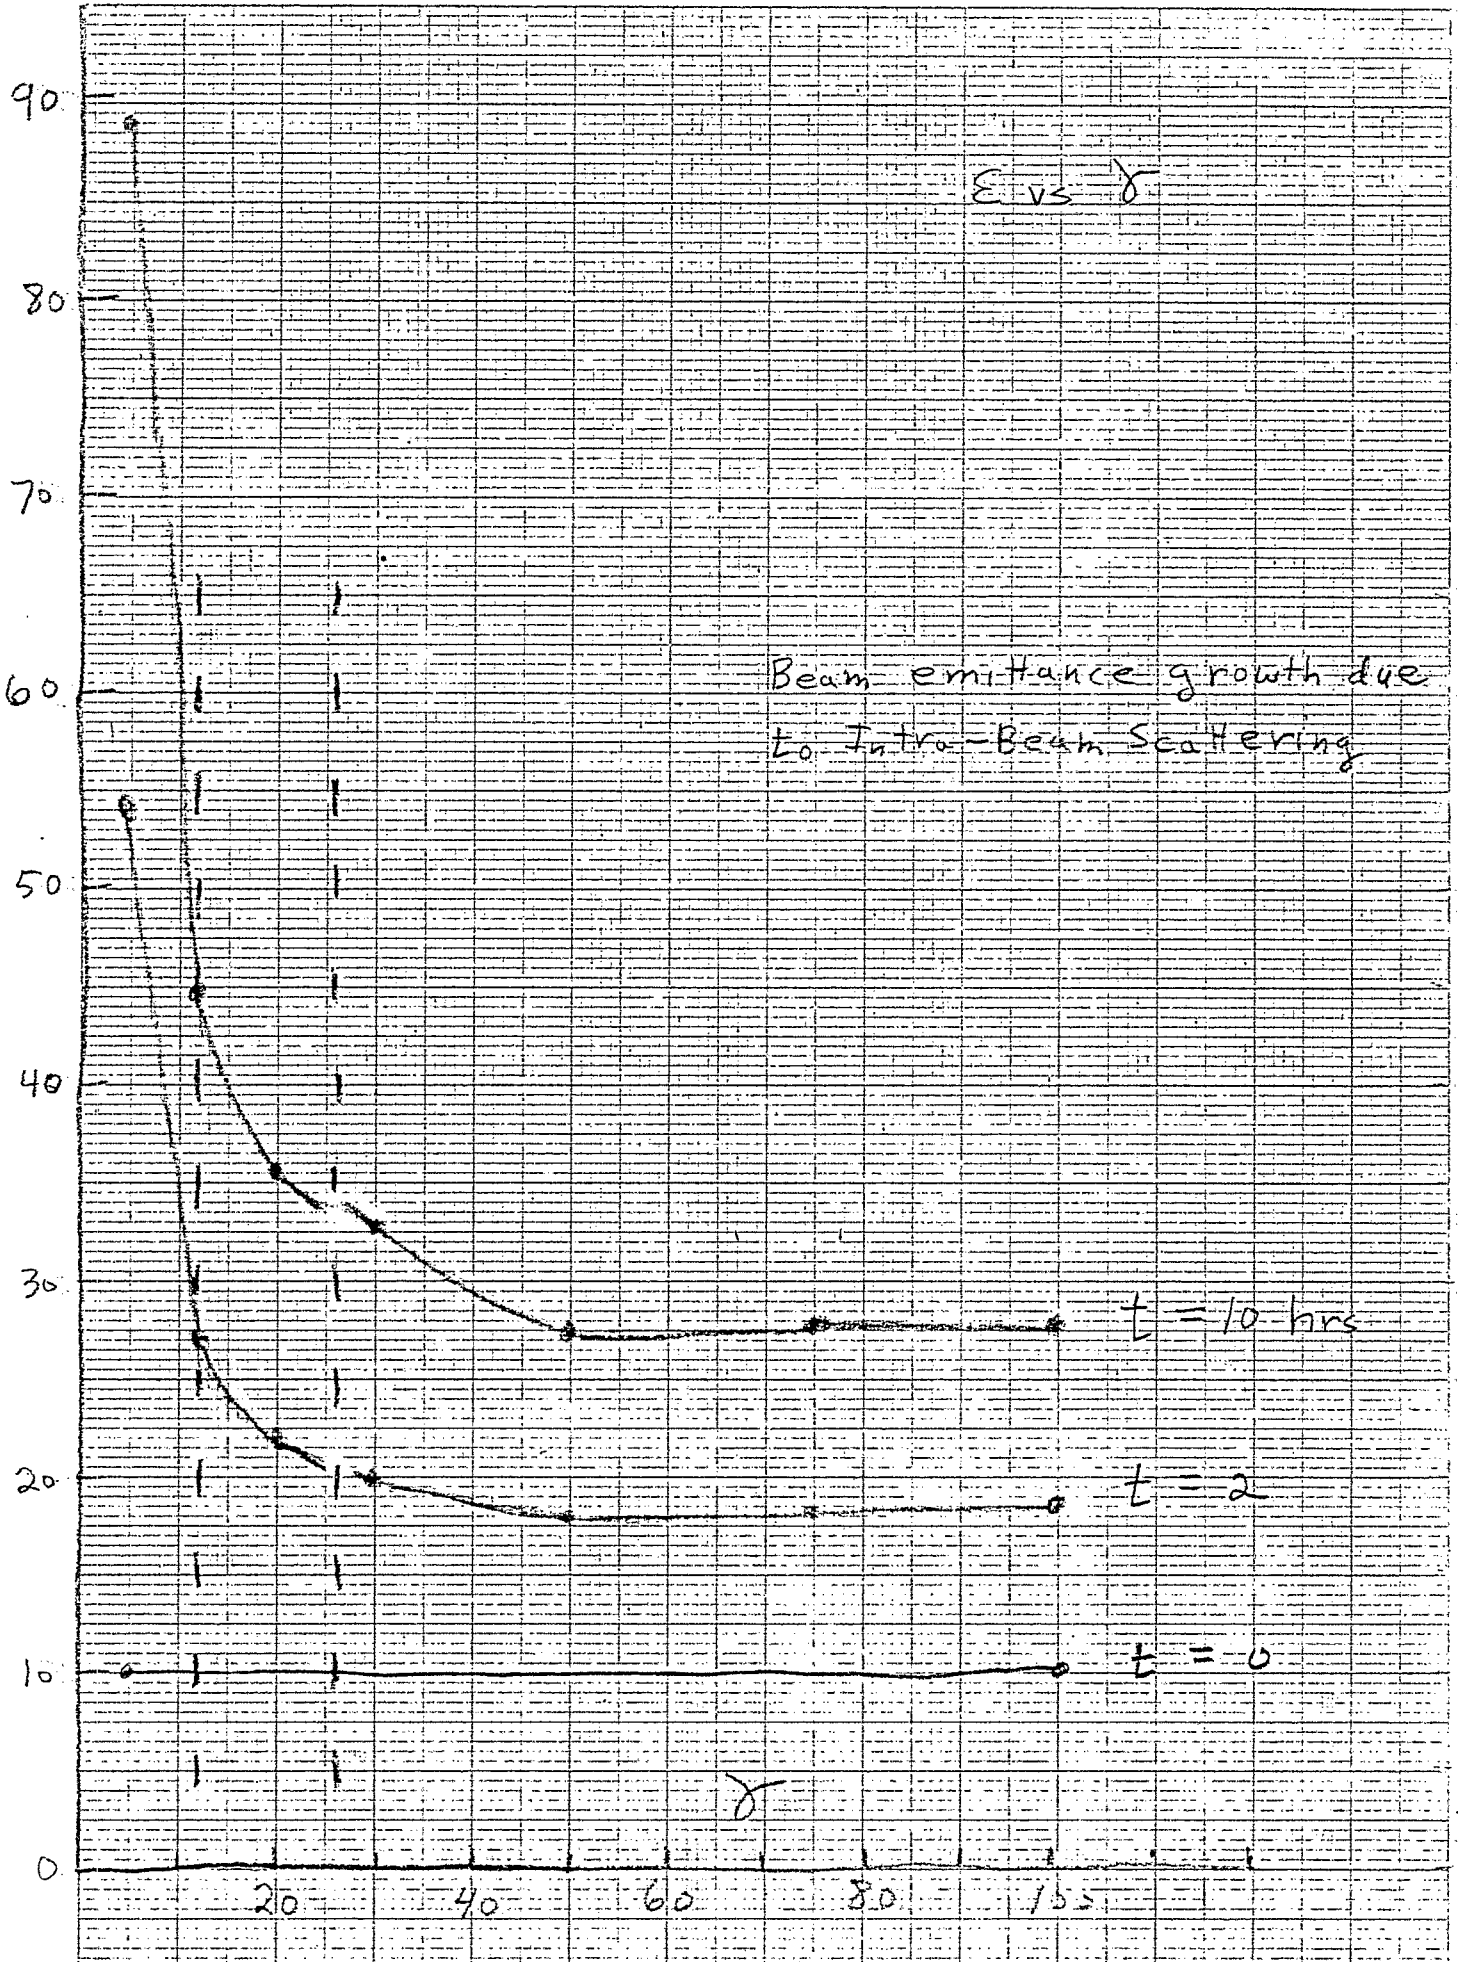

$$2.5 (X_p \delta + \sqrt{H}) \sqrt{\delta}$$

30

20

10

(mm)

Beam half-width growth due to
Intra-Beam Scattering

t = 10 hrs

t = 2

t = 0

δ

20

40

60

80

100

30MM X 10 X 10 TO THE RIGHT SIDE

ATOMIC ENERGY CORPORATION
PUBLISHED BY THE BUREAU OF STANDARDS
WASHINGTON, D.C. 20540

GRAPHIC CENTER OF CORPORATION
PUBLISHED BY THE BUREAU OF STANDARDS
WASHINGTON, D.C. 20540

GRAPHIC COURSEWORK - COMPLETION
FUTURE NEW YORK - BOSTON
SQUARE 10 X 10 IN. HALF PITCH
AS 3312 C
GRAPHIC COURSEWORK - COMPLETION
FUTURE NEW YORK - BOSTON
SQUARE 10 X 10 IN. HALF PITCH
AS 3312 C

