

Vortex stabilized electron beam compressed fusion grade plasma

A. Hershcovitch

March 2014

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

C-A/AP/508
March 2014

Vortex stabilized electron beam compressed fusion grade plasma

A. Hershcovitch



**Collider-Accelerator Department
Brookhaven National Laboratory
Upton, NY 11973**

Notice: This document has been authorized by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-98CH10886 with the U.S. Department of Energy. The United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this document, or allow others to do so, for United States Government purposes.

Vortex Stabilized Electron Beam Compressed Fusion Grade Plasma

Ady Hershcovitch

Most inertial confinement fusion schemes comprise of highly compressed dense plasmas. Those schemes involve short, extremely high power, short pulses of beams (lasers, particles) applied to lower density plasmas or solid pellets.

An alternative approach could be to shot an intense electron beam through very dense, atmospheric pressure, vortex stabilized plasma. Large azimuthal magnetic generated by the electron beam is to compress and heat the plasma to fusion viable parameters. Unlike Z-pinches, this configuration should, in principle, be stable against sausage or kink instabilities; or beam – plasma instabilities (below density threshold). Based on experimental evidence beam propagation through the plasma should not be an issue.

Density of initial, pre-compression, plasma can be taken to be $5 \times 10^{23} \text{ m}^{-3}$, i.e. typical plasma window density, which can easily be increased by more than one order of magnitude in the below vortex stabilized embodiment. Plasma window arc with those densities were extended into atmosphere for a few cm to form steady state-state a free-standing vortex stabilized arc without any enclosures [A. Hershcovitch, Phys. Plasmas **15**, 057101 (2008)]. With enclosures vortex stabilized arcs can be extended for meters.

An electron beam with current I_z generates an azimuthal magnetic field B_θ at a radial position R , which is given by Ampere's law

$$B_\theta = \frac{\mu_0 I_z}{2\pi R}$$

Magnetic “pinching force” exerted on the plasma raises its pressure P , such that the kinetic pressure gradient is balanced by the magnetic pinching force.

$$\nabla_R P = J_z \times B_\theta \quad \text{where} \quad \nabla_R P \sim \frac{P}{R} \quad \text{and} \quad J_z = \alpha \frac{B_\theta}{R}$$

While $P = nK_B T$, where n and T are plasma density and temperature respectively; K_B is the Boltzmann constant. In SI unities $K_B = 1.38 \times 10^{-23}$ and $\mu_0 = 4\pi \times 10^{-7}$.

Solving the above equations for nT in terms of R ,

$$nT = 4.6 \times 10^{15} \frac{I_z^2}{R^2} \quad (1)$$

Maximum fusion reaction rate for D-T plasma is $\langle \sigma v \rangle = 1 \times 10^{-21} \text{ m}^3/\text{sec}$, where σv is the fusion cross section velocity product. That maximum fusion reaction rate has a broad peak for T between 15 to 20 KeV, or $1.74 \times 10^8 \text{ K} - 2.3 \times 10^8 \text{ K}$.

Without exploring implementation details, reasonable electron beam and plasma parameters are assumed, based on which fusion power can be estimated.

Assuming a 1-meter long plasma compressed to 1 cm (0.01 m), equation becomes,

$$nT = 4.6 \times 10^{19} I_z^2 \quad (2)$$

Two electron beam currents of 1 MA and 10 MA are examined, for which using equation 2, $nT = 4.6 \times 10^{31}$ and $nT = 4.6 \times 10^{33}$ respectively; [comparing plasma and magnetic pressures as a check (for I_z of 1 and 10 MA, $B_\theta = 20$ and 200 Tesla respectively) equating kinetic and magnetic pressures $P = nK_B T = B_\theta^2 / 2\mu_0$, solving for nT also yields about the same results for nT].

For $T = 15$ KeV, $n = 2.64 \times 10^{+23} \text{ m}^{-3}$ and $n = 2.64 \times 10^{+25} \text{ m}^{-3}$ respectively, in which there are, in the 1-m long 1-cm radius plasma are $N = 8.3 \times 10^{19}$ and 8.3×10^{21} particles respectively.

Therefore, the total generated D-T fusion power ($Q=17.4$ MeV per fusion reaction) is


$P = Nn\langle\sigma v\rangle Q = 6.1 \times 10^{10} \text{ Watt}$ and $6.1 \times 10^{12} \text{ Watt}$ respectively (for 1 MA and 10 MA beams).

With readily available electron beam technology, net power cannot be generated by this method, since electron beam energy will need to be in the multi-MeV range, i.e. beam power will exceed fusion power by more than an order of magnitude.

But, since the plasma window was shown to separate 9 atmosphere gas targets from vacuum [A. Hershcovitch, Physics of Plasmas, **5**, 2130 (1998)], it is not inconceivable to start with a pre-compression pressure of 9 atmosphere, i.e. with a density of $4.5 \times 10^{24} \text{ m}^{-3}$. For the same compression factor with a 10 MA electron beam, close to breakeven conditions can be reached. Higher electron beam currents are reached at relatively lower extraction voltages, since electron beam current scale as $V^{3/2}$ (non-relativistic). Higher pre-compression densities are also possible. However, when considering the efficiencies of thermal to electrical conversion of fusion energy and generating the electron beam, as well as the energy required to produce the target plasma, the scheme viability as an electrical power generating reactor does not seem to be promising.

Nevertheless there is a glimmer of hope with a plasma cathode electron beam that was developed a while ago (for which DOE has a patent: A. Hershcovitch, V.J. Kovarik, K. Prelec, U.S. Patent 4,942,339, July 17, 1990, Intense High Brightness Steady State Electron Beam Generator), since with plasma cathode electron gun (non-relativistic) a perveance of over 280 microperv was achieved (factor of about 300 larger than high perveance guns), and since there are relativistic enhancements to the Child law, MA electron beams could be extracted at below MV. More details regarding that electron gun can be found at A. Hershcovitch, "Extraction of superthermal electrons in a high current, low emittance, steady state electron gun with a plasma cathode," Appl. Phys. Lett. **68**, 464 (1996). An electron beam can then be focused into a plasma target, where any space charge limitations are neutralized.

However, further R&D is required for such electron beam technology development.

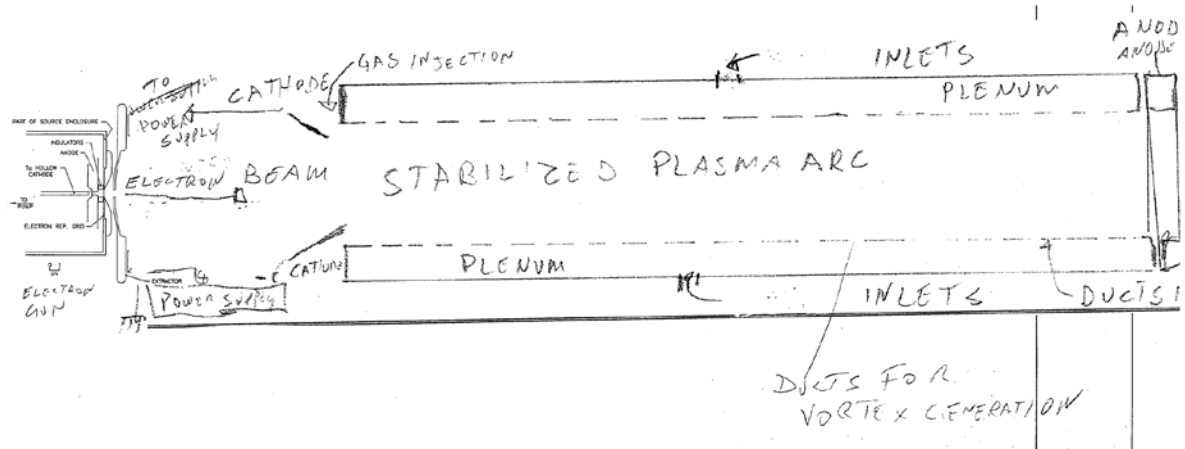

Possible embodiment of the fusion grade plasma generation concept; plasma cathode electron gun is displayed in the above figure.