

RHIC Spin flipper, fast-sweep efficiency simulations

F. Meot

August 2017

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC), Nuclear Physics (NP) (SC-26)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-SC0012704 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.


DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

C-A/AP/589
August 2017

RHIC Spin flipper, fast-sweep efficiency simulations

**F. Meot, H. Huang, J. Kewisch,
P. Oddo, G. Robert-Demolaize, T. Roser**

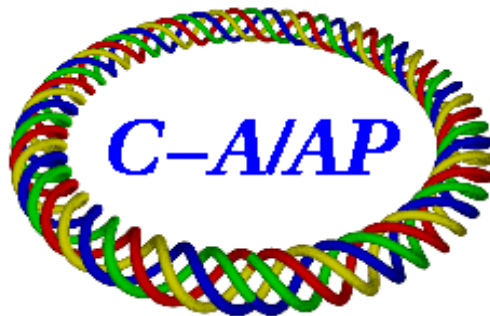

Collider-Accelerator Department
Brookhaven National Laboratory
Upton, N.Y. 11973

U.S. Department of Energy
Office of Science, Office of Nuclear Physics

Notice: This document has been authorized by employees of Brookhaven Science Associates, LLC under Contract No. **DE-SC0012704** with the U.S. Department of Energy. The United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this document, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

RHIC spin flipper, fast-sweep efficiency simulations


F. Méot, H. Huang, J. Kewisch, P. Oddo, G. Robert-Demolaize, T. Roser

Collider-Accelerator Department, BNL, Upton, NY 11973

August 8, 2017

Abstract

Polarization flip simulations have been performed during Run 17 in parallel to resuming spin flipper experiments in RHIC. They are reported here, including some guidance they brought.

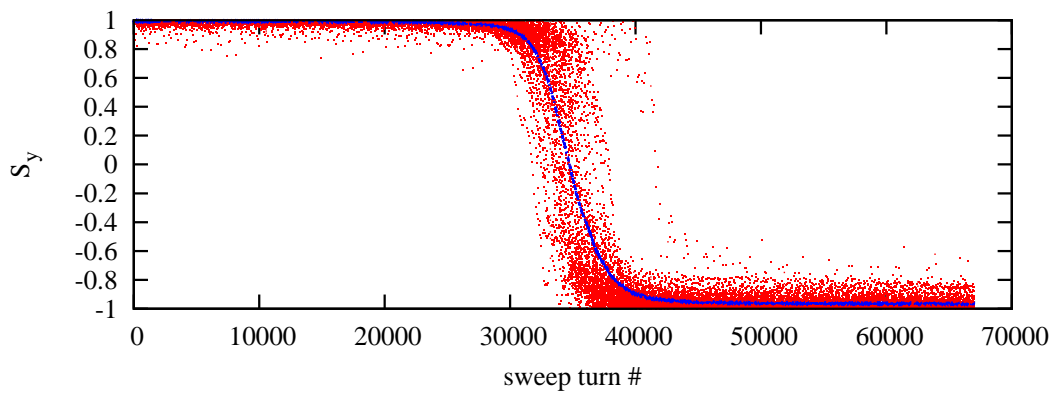

*Tech. Note CA/AP/589
BNL C-AD*

Contents

| | | |
|-----|---|----|
| 1 | Introduction | 3 |
| 2 | Spin flipper in RHIC, simulation conditions | 3 |
| 3 | Numerical outcomes | 6 |
| 3.1 | Injection ($G\gamma = 45.5$) | 6 |
| 3.2 | Store ($G\gamma = 487$) | 10 |
| 3.3 | A summary table | 12 |
| 4 | Conclusions | 13 |

1 Introduction

Spin flip simulations in RHIC were performed in the May-June period during Run 17, in parallel with RHIC spin flipper experiments which were resumed during this very RHIC run.

These simulations have had two significant outcomes :

(i) increasing the AC dipole frequency sweep rate, by a substantial amount compared to the value initially used during the experiments, appears to improve the spin flip efficiency,

(ii) in the conditions of the simulations (e.g., defect-free ring ; ideal snakes : 180° spin rotation at $\pm 45^\circ$ from the longitudinal axis ; 180° orbit angle between the two snakes opposing in RHIC diameter ; perfect spin flipper setting including absence of image resonance, etc.), the difference in the dispersion derivative at the two snakes as a source of spin tune spread via the chromatic orbit angles at the snakes [1], subject to dedicated RHIC optics settings during Run 17 spin flipper experiment, does not seem of very stringent importance.

These two observations from the simulations were used as a guidance : the first one was confirmed experimentally, and there are indications from the experiments that the second observation holds.

Section 2 below recalls the principles of the spin flipper system in RHIC, and introduces the resulting input data to the simulations for the sake of clarity. Section 3 presents the main outcomes of these simulations, which Section 4 comments on.

2 Spin flipper in RHIC, simulation conditions

The spin flipper in RHIC is an interleave of four horizontal dipoles (“DC rotator” in Fig. 1) and five vertical AC dipoles (AC dipole#1-5). It is located in the RHIC Blue ring, between “BI9_TQ4” and “BI9_QF3” quadrupoles.

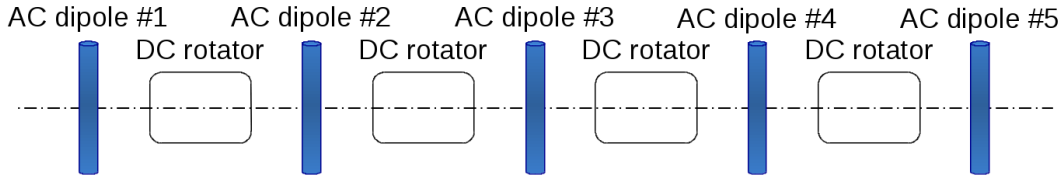


Figure 1: Layout of the spin flipper [1].

The principles of this spin flipper and its installation in RHIC are detailed and discussed in Refs. [1]-[5]. The 4 “spin rotator” dipoles are DC, they yield spin y-rotation angles $+/-/-/+ \times \phi_0$ respectively, with

$$\phi_0 = (1 + G\gamma) \frac{BL}{B\rho} \quad (1)$$

Orbit-wise this defines a closed local horizontal bump and, spin-wise, it leaves the spin tune Q_s unchanged.

The 5 AC dipoles are operated at frequency $Q_{osc} \approx f_{rev}/2$, with fractional part in the vicinity of Q_s . ACD1-3 and ACD3-5 ensure the same $+1/-2/+1 \times \psi_{osc}$ spin x-rotation sequence,

$$\psi_{osc} = (1 + G\gamma) \frac{B_{osc}L}{B\rho} \quad (2)$$

Orbit-wise, each triplet ensures a local vertical orbit bump. Fields in ACD 2 and 4 are $180^\circ + \phi_0$ distant in phase.

This configuration induces spin resonance at $Q_{osc} = Q_s$ while eliminating the image resonance at $1 - Q_s$, therefore ensuring *single resonance crossing* during Q_{osc} sweep through $Q_s \approx \frac{1}{2}$ and allowing full spin flip (isolated resonance crossing in the presence of image resonance instead, would otherwise require Q_s to be away enough from $\frac{1}{2}$ and Q_{osc} excursion accordingly small).

The strength of this spin-resonance system is

$$|\epsilon| = \frac{\psi_{osc}}{\pi} \sin \phi_0 \sin \frac{\phi_0}{2} \quad (3)$$

The crossing speed (rate of sweep of Q_{osc} through $Q_s \approx \frac{1}{2}$) is

$$\alpha = \frac{\Delta Q_{osc}}{d\theta}, \quad d\theta = 2\pi N \quad (4)$$

with ΔQ_{osc} the AC dipole frequency span and N the number of turns of the sweep. α has to be small enough (N large enough) for spins to follow the flip of the spin precession axis so that the polarization states P_f (final) and P_i (initial) satisfy

$$\frac{P_f}{P_i} = 2 \exp^{-\frac{\pi}{2} \frac{|\epsilon|^2}{\alpha}} - 1 \approx -1 \quad (5)$$

D' lattice : Momentum dispersion induces spin tune spread, via

$$\delta Q_s = \frac{G\gamma}{\pi} \Delta D' \frac{\Delta p}{p} \quad (6)$$

with $\Delta D'$ the difference in D' at the two snakes [6]. This effect is considered a cause of loss of polarization during the frequency sweep, in particular by inducing multiple resonance crossing under the effect of synchrotron motion - following the sketch in page 7.

“D' lattice” optics are aimed at overcoming that effect, by ensuring minimized $\Delta D'$ during the ACD frequency sweep. They require dedicated, possibly lengthy, tunings based on the use of gamma transition quads [1].

Typically: $\delta Q_s / \frac{\Delta p}{p} = 150 \times \Delta D'$ at 250 GeV, about 10 times less at injection. Thus, assuming $\delta p/p < 10^{-3}$, reducing δQ_s at $< 10^{-3}$ level (namely, small enough by comparison with ΔQ_{osc} , see sketch p. 7) requires a typical $\Delta D' < 70$ mrad at injection, $\Delta D' < 7$ mrad at store.

DC rotator and AC dipole settings in these simulations are consistent with (although not strictly identical to) Run 17 APEX conditions in RHIC, Table below.

| Numerical simulation data (actual APEX conditions in column 5) | | | | |
|--|---------------|-------------|-------------|---------------------------------------|
| | | injection | store | |
| $G\gamma$ | | 45.5 | 487 | |
| $B\rho$ | (T.m) | 79.37 | 850.128 | |
| ACD strength | (G.m) | 102 | 102 | APEX : 100 G.m |
| ACD ψ_{osc} | (deg) | 0.342 | 0.336 | |
| DC rotator ϕ_0 | (deg) | 29.9 | 44.9 | APEX : 48.8° at store |
| $ \epsilon $ | (10^{-4}) | 2.45 | 4.32 | |
| Q_{osc} range | | 0.49 - 0.51 | 0.49 - 0.51 | APEX : $\Delta Q_{osc} = 0.005$ |
| RF systems | (MHz) | 9 or 28 | 9 + 197 | APEX : 9 + 197 at injection and store |

Details of RF conditions during APEX :

Blue 9MHz cavity is the main one for injection and acceleration. It is set at 22 kV at injection and 30 kV at store. The 28 MHz (BA1 and BA2) are considered off. However 28 MHz has been investigated in the simulations (not reported here - with a trend to loss of spin flip efficiency due to multiple crossing, sketch in page 7, also discussed in [7]).

The Landau cavities (BS1 and BS2) are 197 MHz ones and voltage is around 10 kV at injection, 15 kV at store. These are the conditions as well for the double-RF simulations (see p. 11).

Detailed data for the rotator and AC dipoles in Zgoubi [8] are given in page 5. Details of RF conditions are given in due place together with the tracking outcomes (Sec. 3).

Zgoubi input/output files used in these studies can be found in

/rap/lattice_tools/zgoubi/RHICZgoubiModel/spinFlipper

C-AD server folders.

- ZGOUBI INPUT -

• DC rotators and AC dipoles input data, injection :

AC dipole sweep command :

```
MULTIPOL ACD1
-88
0.521678913421 0.49 0.51 1. C Q1 Q2 P
50 3000 20000 3000
MULTIPOL ACD2
-88
0.0 0.49 0.51 1. C Q1 Q2 P
50 3000 20000 3000
```

Spin flipper sequence :

```
'MULTIPOL' ACD1 BI9_DAC3.5
0 .kicker
0.100000E+03 10. -0.0494 0. 0. 0. 0. 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
1.57079632679 0. 0. 0. 0. 0. 0. 0. 0.
#20|4|20 Kick
3 0. 0. 0.
'DRIFT' DRIF DRIFT_87
36.464200
'MULTIPOL' DCRot BI9_TH3.4
0 .kicker
0.183000E+03 10. -0.691857780671 0. 0. 0. 0. 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
0.000000000 0. 0. 0. 0. 0. 0. 0. 0.
#20|4|20 Kick
1 0. 0. 0.
'DRIFT' DRIF DRIFT_88
109.414800
'MULTIPOL' ACD1 BI9_DAC3.4
0 .kicker
0.100000E+03 10. 0.101857839 0. 0. 0. 0. 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
1.57079632679 0. 0. 0. 0. 0. 0. 0. 0.
#20|4|20 Kick
3 0. 0. 0.
```

```
'DRIFT' DRIF DRIFT_89
82.463600
'MULTIPOL' DCRot BI9_TH3.3
0 .kicker
0.183000E+03 10. 0.691857780671 0. 0. 0. 0. 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
0.000000000 0. 0. 0. 0. 0. 0. 0. 0.
#20|4|20 Kick
1 0. 0. 0.
'DRIFT' DRIF DRIFT_90
63.415400
'MULTIPOL' ACD1 BI9_DAC3.3_1
0 .kicker
50. 10. -0.104915681 0. 0. 0. 0. 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
1.57079632679 0. 0. 0. 0. 0. 0. 0. 0.
#20|4|20 Kick
3 0. 0. 0.
'MULTIPOL' ACD2 BI9_DAC3.3_2
0 .kicker
50. 10. -0.104915681 0. 0. 0. 0. 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
1.57079632679 0. 0. 0. 0. 0. 0. 0. 0.
#20|4|20 Kick
3 0. 0. 0.
'DRIFT' DRIF DRIFT_87
36.464200
'MULTIPOL' DCRot BI9_TH3.2
0 .kicker
0.183000E+03 10. 0.691857780671 0. 0. 0. 0. 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
0.000000000 0. 0. 0. 0. 0. 0. 0. 0.
#20|4|20 Kick
1 0. 0. 0.
```

```
'DRIFT' DRIF DRIFT_88
109.414800
'MULTIPOL' ACD2 BI9_DAC3.2
0 .kicker
0.100000E+03 10. 0.101857834 0. 0. 0. 0. 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
1.57079632679 0. 0. 0. 0. 0. 0. 0. 0.
#20|4|20 Kick
3 0. 0. 0.
'DRIFT' DRIF DRIFT_89
82.463600
'MULTIPOL' DCRot BI9_TH3.1
0 .kicker
0.183000E+03 10. -0.691857780671 0. 0. 0. 0. 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
0.000000000 0. 0. 0. 0. 0. 0. 0. 0.
#20|4|20 Kick
1 0. 0. 0.
'DRIFT' DRIF DRIFT_90
63.415400
'MULTIPOL' ACD2 BI9_DAC3.1
0 .kicker
0.100000E+03 10. -0.0494 0. 0. 0. 0. 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
.0 .0 1.00 0.00 0.00 0.00 0.00 0.0 0. 0.
4 .1455 2.2670 -.6395 1.1558 0. 0. 0.
1.57079632679 0. 0. 0. 0. 0. 0. 0. 0.
#20|4|20 Kick
3 0. 0. 0.
```

• DC rotators and AC dipoles input data, store :

AC dipole sweep command :

```
BEND ACD1
-88
0.785398163 0.49 0.51 1.
50 3000 28000 3000
BEND ACD2
-88
0.0 0.49 0.51 1.
50 3000 28000 3000
```

Spin flipper sequence :

```
'BEND' ACD1
0
100.0000000 1.5707964 -0.0494
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
#10|200|10
1 0. 0. 0.
'DRIFT' DRIF O3B9L9
2.1336
'DRIFT' DRIF O3B9L10
17.3228
'DRIFT' DRIF O3B9L11
17.0078
'BEND' DCRot
0 .Bend
183.0000000 0.0000000 -7.47658814
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
#10|100|10
3 0. 0. 0.
'DRIFT' DRIF O3B9L12
23.4360
'DRIFT' DRIF O3B9L13
23.9268
'DRIFT' DRIF O3B9L14
17.2720
'DRIFT' DRIF O3B9L15
17.7800
'DRIFT' DRIF O3B9L15X
27.0000
'BEND' ACD1
0
100.0000000 1.5707964 0.101857839
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
#10|200|10
1 0. 0. 0.
'DRIFT' DRIF O3B9L16
17.7800
```

```
'DRIFT' DRIF O3B9L17
19.4818
'DRIFT' DRIF O3B9L18
45.2018
'BEND' DCRot
0 .Bend
183.0000000 0.0000000 7.47658814
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
#10|100|10
3 0. 0. 0.
'DRIFT' DRIF O3B9L19
16.9590
'DRIFT' DRIF O3B9L20
17.3228
'DRIFT' DRIF O3B9L21
2.1336
'DRIFT' DRIF O3B9L21X
27.0000
'BEND' ACD1
0
50.0000000 1.5707964 -0.104915681
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
#10|200|10
1 0. 0. 0.
'BEND' ACD2
0
50.0000000 1.5707964 -0.104915681
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
#10|200|10
1 0. 0. 0.
'DRIFT' DRIF O3B9L22
2.1336
'DRIFT' DRIF O3B9L23
17.3228
'DRIFT' DRIF O3B9L24
17.0078
'BEND' DCRot
0 .Bend
183.0000000 0.0000000 7.47658814
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
#10|100|10
3 0. 0. 0.
'DRIFT' DRIF O3B9L25
45.1530
```

```
'DRIFT' DRIF O3B9L26
19.4818
'DRIFT' DRIF O3B9L27
17.7800
'DRIFT' DRIF O3B9L27X
27.0000
'BEND' ACD2
0
100.0000000 1.5707964 0.101857834
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
#10|200|10
1 0. 0. 0.
'DRIFT' DRIF O3B9L28
17.7800
'DRIFT' DRIF O3B9L29
19.4818
'DRIFT' DRIF O3B9L30
45.2018
'BEND' DCRot
0 .Bend
183.0000000 0.0000000 -7.47658814
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
#10|100|10
3 0. 0. 0.
'DRIFT' DRIF O3B9L31
16.9590
'DRIFT' DRIF O3B9L32
17.3228
'DRIFT' DRIF O3B9L33
2.1336
'DRIFT' DRIF O3B9L33X
27.0000
'BEND' ACD2
0
100.0000000 1.5707964 -0.0494
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
0.00 0.00 0.00
4 .2401 1.8639 -.5572 .3904 0. 0. 0.
#10|200|10
1 0. 0. 0.
```

3 Numerical outcomes

3.1 Injection ($G\gamma = 45.5$)

Fig. 2 shows the two optics tracked, regular Run 17 lattice (left plot), and D' lattice (right) using the gamma transition patch translated from RHIC MADX model. $\Delta D'$ can easily be changed by tweaking a sensitive one of the γ_{tr} quadrupole families [1] - this is done here regardless of possible $\delta\beta/\beta$ betatron modulation however that tweak is small. Separation bumps at all IPs have been zeroed in the simulations, the orbit is flat. Snakes are simulated using "SPINR", pure spin rotation, no local orbit bump.

D' at snakes 1 and 2 takes the following values :

◇ **without transition gamma quadrupole patch :**

SNAKE 1 : +13.713194E-003 rd $|D'_1 - D'_2| = 63.2$ mrad.
SNAKE 2 : -49.502845E-003

◇ **with transition gamma quadrupole patch, typical :**

SNAKE 1 : -10.379716E-003 $|D'_1 - D'_2| = 5.7$ mrad.
SNAKE 2 : -16.113063E-003

Spin flip has been tracked with several different $\Delta D'$ values. Note that in the non-D' lattice case $\Delta D' = 63$ mrad < 70 mrad, so that in the presence of $dp/p < 1.5 \times 10^{-3}$ it ensures, as seen earlier, $\delta Q_s < 1.5 \times 10^{-3}$, smaller than the $\Delta Q_{osc} = 0.02$ span considered here, so partial flip can be expected.


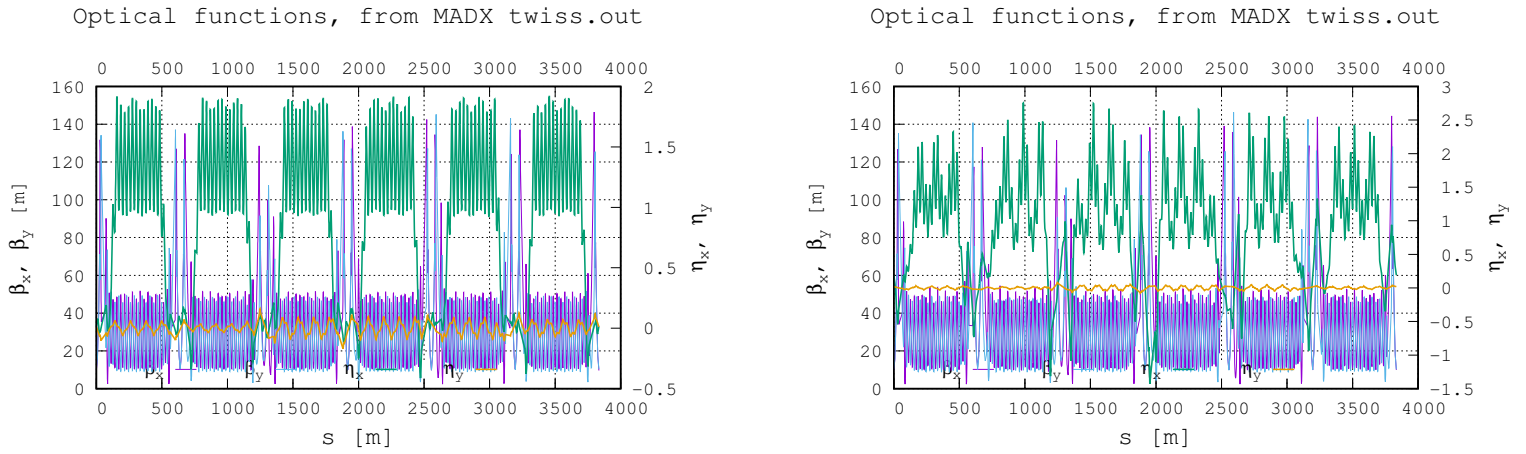


Figure 2: Blue injection optics, without (left) and with (right) D' lattice transition gamma quadrupole patch. In both cases, vertical separation bumps at IPs have been zeroed, here as well as in the flip simulations.

In addition :

- RF frequency is 9 MHz,
- 960 particles are tracked, Gaussian-distributed (truncated) in a 6-D bunch, polarization is computed as an average over that ensemble,
- particles possibly lost in some cases (due to purposely large/long bunch, in small number anyway) are not counted in the average polarization.

Orbit : possible residual orbit induced by the spin flipper (case of DC or AC bumps not strictly locally closed) may have a deleterious effect on the resonance crossing [3]. The two figures below show the horizontal and vertical orbits in the course of a sweep in the present simulations, namely, negligible orbital motion (at a few micro-meter level at IP6, about two orders of magnitude smaller than the betatron excursions of the particles).

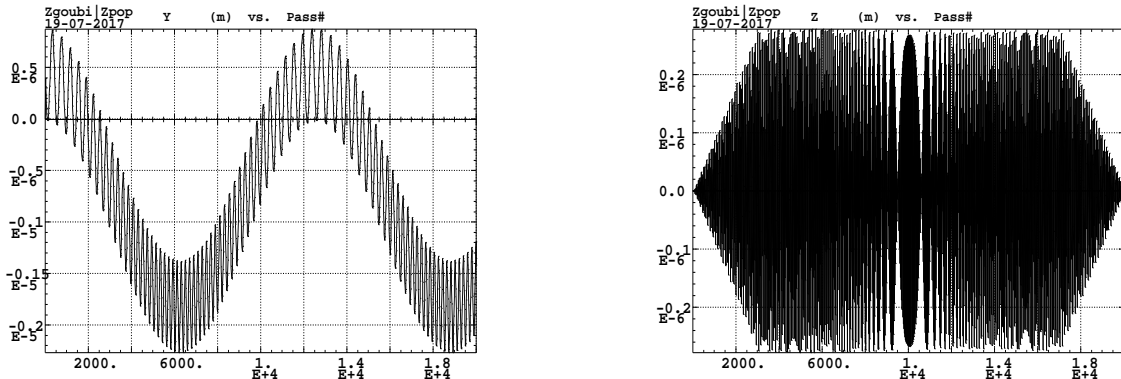

Orbital motion observed at IP6 (left : horizontal, right : vertical), in the conditions of the "regular optics" ΔQ_{osc} sweep of pp. 8, 9.

The 9 MHz RF 6 Hz synchrotron oscillation (13,000 turns about) is apparent on the left graph.


In both cases the residual orbit is marginal, well below 1 μm .

Multiple crossing has been identified as a possible cause for polarization loss during the Q_{osc} sweep, this is sketched in the figures on the right (with simulation conditions of page 8).

However, a $\Delta Q_{\text{osc}} = 0.02$ sweep in $\approx 15,000$ turns, with 9 MHz RF, is about one synchrotron period :

$$\Omega_s = \frac{c}{R} \sqrt{\frac{h\eta \cos(\phi_s) q \hat{V}}{2\pi E_s}}$$

Here, $R = 3833.8$ m, $h = 120$ (9 MHz), $\eta = 25.4^{-2} - 0.002 = -4.5 \times 10^{-4}$, $\cos(\phi_s) = -1$, $q\hat{V} = 20$ keV, $E_s = 23.8$ GeV, so that $\Omega_s/2\pi \approx 6$ Hz, $2\pi/\Omega_s \approx 12,000$ turns. As a consequence, a 10 – 20,000 turn Q_{osc} sweep as considered in the simulations, $1 \sim 2$ synchrotron oscillations, limits the possible number of crossings during the sweep (top figure on the right). Instead, 28 MHz, 200 kV RF, $\Omega_s/2\pi \approx 36$ Hz, $2\pi/\Omega_s \approx 2,200$ turns, yields conditions more prone to multiple crossing, bottom figure on the right. This is confirmed by simulations (see Ref. [7] for instance).

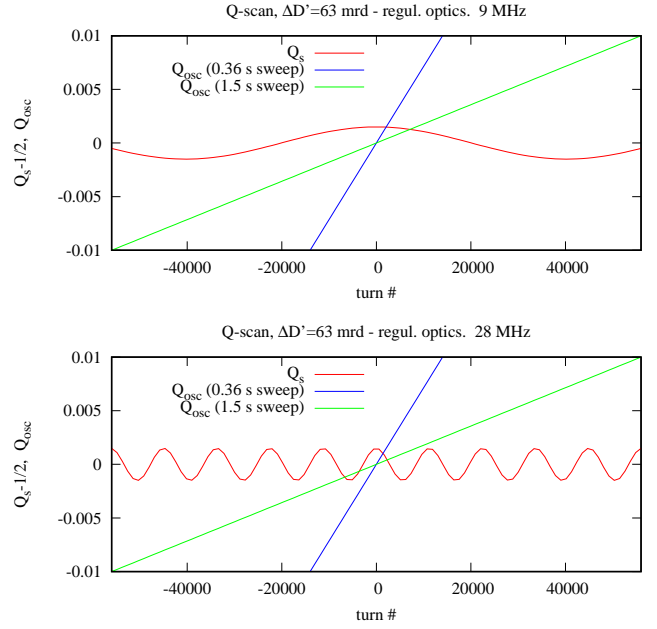

The next pages 8-9 give sample spin flip simulation results (simulations performed on NERSC [9]), for various $\Delta D'$ values and sweep durations. The graphics displayed include spin motion across the resonance for a 50-particle sample (red dots), and the average polarization over 960 particles (blue curves), as well as orbital motion monitoring of the 6-D bunch tracked.


Beyond showing the efficiency improvement with increased sweep rate, the tracking results in page 9 are an indication that spin flip can be obtained with $\Delta D'$ substantially different from zero - at least in the defect free, perfect flipper setting conditions of these simulations.

- REGULAR OPTICS ($\Delta D' = 63$ mrad), TWO DIFFERENT SWEEP DURATIONS. RF 9 MHz -


(Red dots : sample trajectories. Blue curves : average over ~ 960 particles)

The two plots below show that the simulations yield substantial spin flip efficiency, in spite of a large $\Delta D'$ value (regular Run 17 lattice).

• REGULAR OPTICS, SWEEP 20,000 TURNS

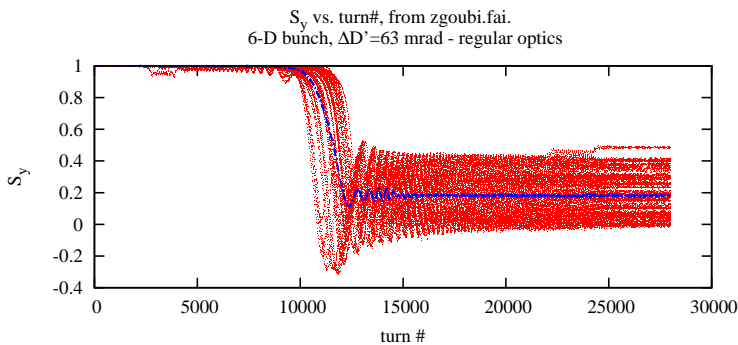

• REGULAR OPTICS, SWEEP 200,000 TURNS

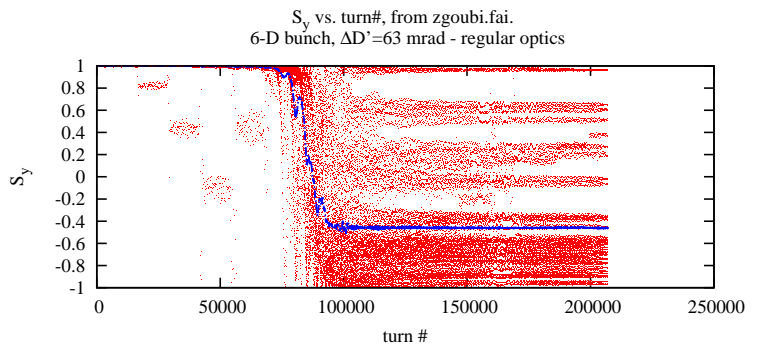


- D' OPTICS, TWO DIFFERENT $\Delta D'$ VALUES. 9 MHz RF, 100,000 TURN SWEEP -


(Red dots : sample trajectories. Blue curves : average over ~ 960 particles).

$\Delta D'$ is varied over a wide range here, it can be seen that the effect on the spin flip efficiency is small, with -0.837 at $\Delta D' = 0.6$ mrad and -0.814 at $\Delta D' = 13$ mrad. Note that in both cases, 200,000 turns sweep ensures close to 100% spin flip efficiency (see $\Delta D' = 13$ mrad case above and next page ; more results in Tab. 1, p. 12).

• $\Delta D' = 0.6$ mrad

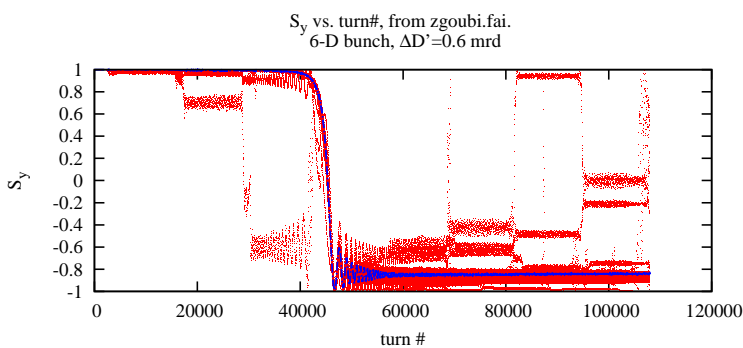

• $\Delta D' = 13$ mrad,

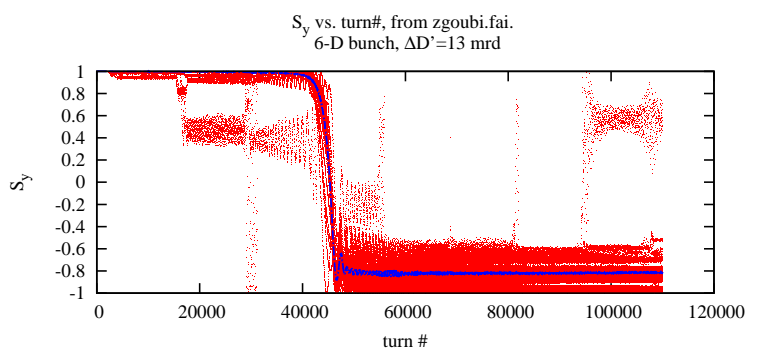

◇ TYPICAL BUNCH AND RF CONDITIONS IN ZGOUBI :




Bunch dimensions in the tracking simulations, above and next page, are about $1 \mu\text{m}$ normalized *rms* emittance, transverse, 30 ns length and $dp/p = \pm 1.5 \times 10^{-3}$ momentum extent. Coordinates are taken Gaussian, truncated at 2σ transverse. The three figures below show phase space motion of a few particles from the 960 particle bunch, during a sweep.

Some particles may be lost (this is apparent in the phase spaces below) depending on RF conditions such as voltage, however in a reduced number (a few percent), and in this case they are not taken into account in computing the average polarization. It has been observed (not shown here) that, taking a smaller bunch, half the transverse excursions displayed in the figures below, same longitudinal phase space, has marginal effect on final polarization.

```
'MCOBJET'
79.366774592048841e3
3
1
2 2 2 2 2 2
0. 0. 0. 0. 0. 1. 'o'
0. 10. 2.5e-8 4 ! rms emittance ~0.6pi micro-m norm.,
0. 9.8 2.5e-8 4 ! cut-off 4-sigma.
0. 5.e4 5e-4 1
123456 234567 345678
```

```
'CAVITE'
2
3833.84668 120.
20.d3 3.14159265359
'REBELOTE'
28000 0.4 99
```


Typical transverse and longitudinal orbital motion, in these simulations :

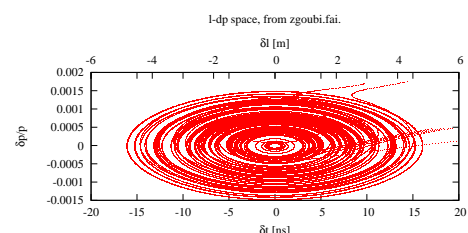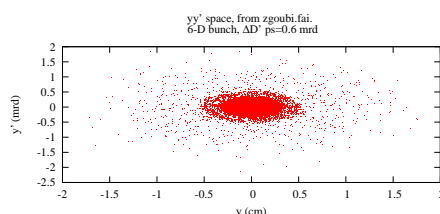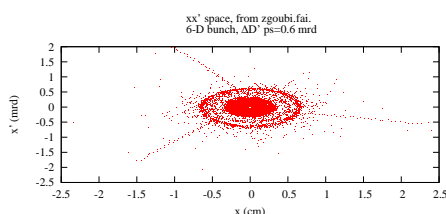


- INJECTION, $D'=13$ mrad, 9 MHz RF. FROM TOP TO BOTTOM : DECREASING SWEEP RATE TOWARDS $P_f/P_i \gg -1$ -

A systematic scan of the sweep rate is illustrated, showing the limits of slow sweep (multiple crossing, top plot) and fast sweep ($P_f/P_i \gg -1$). With $\Delta D' = 13$ mrad, a 200,000 turn sweep, 2.6 seconds, case of $\Delta Q_{osc} = 0.02$, ensures spin flip, equivalent to 50,000 turns, 0.6 second about in the $\Delta Q_{osc} = 0.005$ APEX conditions.


• SWEEP 200,000 TURNS

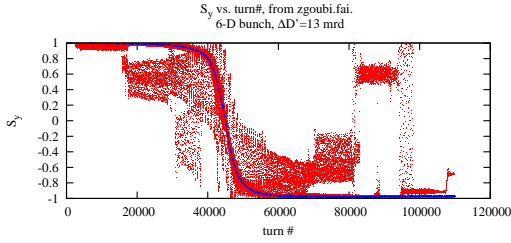


• SWEEP 100,000 TURNS

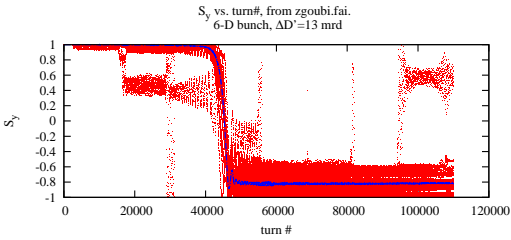


• SWEEP 50,000 TURNS

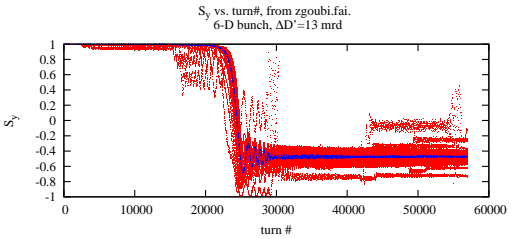

• SWEEP 10,000 TURNS

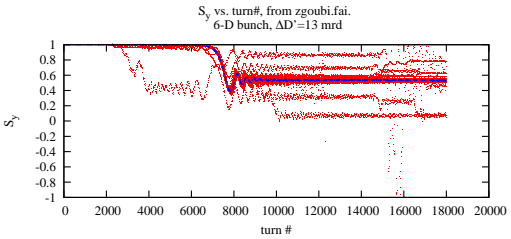

• SWEEP 2,000 TURNS

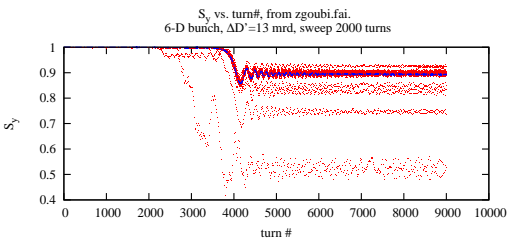


- A match (Fig. below) of (P_f, P_i) data out of the simulations on the left, using

$$\frac{P_f}{P_i} = 2 \exp\left(-\frac{\pi}{2} \frac{|\epsilon|^2}{\alpha}\right) - 1$$

with $\alpha = \Delta Q_{osc}/(N \times 2\pi)$ and $\Delta Q_{osc} = 0.51 - 0.49 = 0.02$, yields

$$|\epsilon| = 2.35402 \times 10^{-4}$$

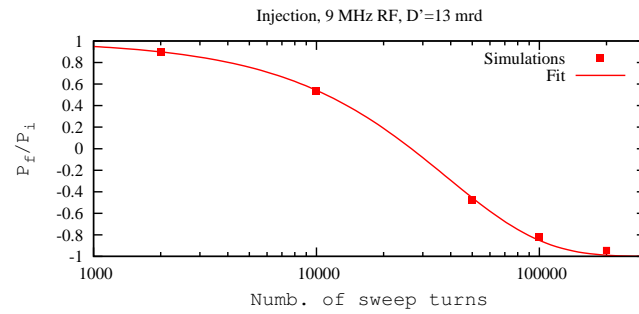

- On the other hand, the numerical simulation hypotheses, namely,

$$\psi_{osc} = (1 + G\gamma) \frac{B_{osc}L}{B\rho} = 5.97 \times 10^{-3}$$

given $G\gamma = 45.5$, $B\rho = 79.4$ T.m, $B_{osc}L = 0.0102$ T.m, and

$$\phi_0 = (1 + G\gamma) \frac{BL}{B\rho} = 0.5215 \text{ rd}, 29.9 \text{ deg}$$

given $BL = 0.4866 \times 1.83$ T.m, yield a resonance strength value within 4% of the matched value above, namely

$$\frac{\psi_{osc}}{\pi} \sin \phi_0 \sin \frac{\phi_0}{2} = 2.445 \times 10^{-4}$$

- The Table below compares the present simulation conditions for 99% spin flip efficiency, and Run 17 APEX conditions :

| | $B_{osc}L$ | ϕ_0 | ϵ | ΔQ_{osc} | minimal N for > 99% flip | duration of the sweep |
|-------------|------------|----------|---------------|------------------|-----------------------------|--------------------------|
| | (G.m) | (deg) | (10^{-4}) | | (turns) | (s) |
| simulations | 102 | 29.9 | 2.35 | 0.02 | 194,000 | 2.48 |
| APEX | 100 | 29.9 | 2.40 | 0.005 | 47,000 | 0.60 |

3.2 Store ($G\gamma = 487$)

Fig. 3 shows typical D' optics conditions for these simulations, namely, taken from C-A/AP-478 [1]. Snakes are simulated using “SPINR”, pure spin rotation, no local orbit bump.

D' values at snakes 1 and 2 in the original lattice are :

SNAKE 1 : -21.041930E-003
SNAKE 2 : -18.937173E-003

$$|D'_1 - D'_2| = 2.1 \text{ mrad.}$$

Note that $\Delta D' = 2.1 \text{ mrad} < 7 \text{ mrad}$, so that $\delta Q_s < dp/p$ (see page 4), well within $\Delta Q_{osc} = 0.02$, a small amplitude which favors absence of multiple crossing.

Spin flipping has also been simulated for the following D' values :

SNAKE 1 : -7.0955449E-004
SNAKE 2 : -2.3282297E-002

$$|D'_1 - D'_2| = 22.5 \text{ mrad.}$$

and with $\Delta p/p \in [-3 \times 10^{-4}, +3 \times 10^{-4}]$. In that case $\delta Q_s = \frac{G\gamma}{\pi} \Delta D' \frac{\Delta p}{p} \approx \pm 10^{-3}$, well within the sweep $\Delta Q_{osc} = 0.02$.

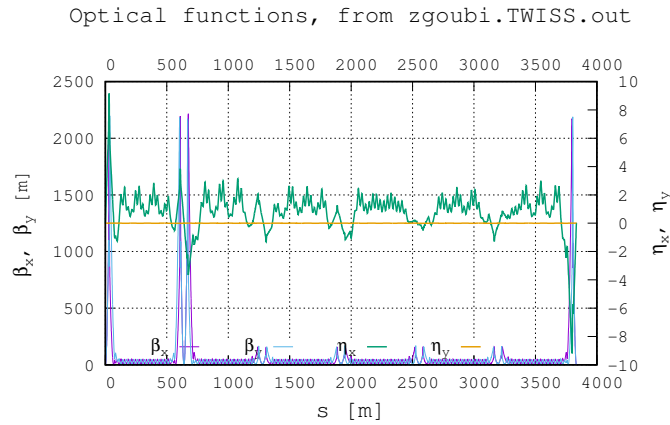


Figure 3: D' lattice optics used in C-A/AP-478.

The DC rotator and AC dipole settings in these store simulations are detailed in page 5.

In particular,

- ◇ AC dipole strength is set to 102 G.m (100 G.m in Run 17 APEX),
- ◇ DC rotator strength is set to 45° (48.8° in RHIC APEX) for appropriate resonance strength ϵ for full spin flipping,
- ◇ the ACD#2-ACD#4 $180^\circ + \phi_0$ phase relationship is set accordingly.

In addition :

- double RF frequency is considered here : $9 + 197 \text{ MHz}$, respectively 30 kV and 15 kV (data and figure below),
- 960 particles are tracked, polarization is the average over that ensemble,
- particles possibly lost (due to excessive bunch size) are not counted in the average polarization.

The next page gives spin flip simulation results (simulations performed on NERSC [9]), for various sweep durations.


The graphics displayed include spin motion across the resonance for a 50-particle sample (red dots), and the average polarization over 960 particles (blue).

◇ TYPICAL BUNCH AND RF CONDITIONS IN ZGOUBI :

Bunch dimensions in the tracking simulations, next page, are about $2.5 \mu\text{m}$ normalized *rms* emittance, transverse, 30 ns length and $dp/p = \pm 3 \times 10^{-4}$ momentum extent. Coordinates are taken Gaussian, transverse are truncated at 2σ . The figure below shows longitudinal phase space motion of a few particles from the 960 particle bunch, during a sweep.

```
'MCOBJET'
850128.3284      ! RIGIDITY
3
1
2 2 2 2 2 2
0. 0. 0. 0. 0. 1. 'o'
0. .6 1e-8 4      ! rms emittance ~2.7pi micro-m norm.,
0. .6 1e-8 4      ! cut-off 4-sigma.
0. 10e4 2.5e-4 1
123456 234567 345678

'CAVITE'
2.1
3833.8459 { 120. , 2520. }      ! double RF, 9 + 197 MHz
{ 30.d3, 15.d3 } 3.14159265359 ! voltages
```

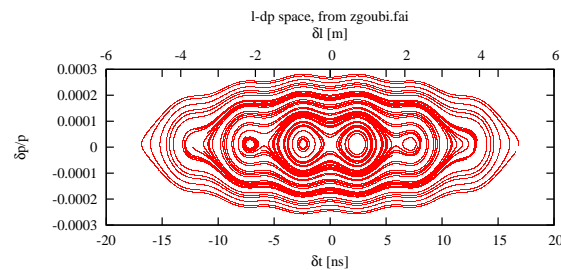


Longitudinal motion, typical.

- STORE, D'=22.5 mrad, DOUBLE-RF 9 + 197 MHz (30 + 15 kV) -
FROM TOP TO BOTTOM : INCREASING SWEEP RATE, UP TO CAUSING $P_f/P_i \gg -1$ -

With $\Delta D' = 22.5$ mrad, a 40,000 turn sweep, 0.5 seconds, ensures spin flip, equivalent to about 8,000 turns, 0.11 second, in the $\Delta Q_{osc} = 0.005$ APEX conditions.

• SWEEP 60,000 TURNS

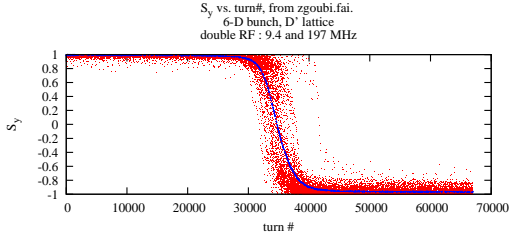



- A match (Fig. below) of (P_f, P_i) data out of the simulations on the left, using

$$\frac{P_f}{P_i} = 2 \exp\left(-\frac{\pi}{2} \frac{|\epsilon|^2}{\alpha}\right) - 1$$


with $\alpha = \Delta Q_{osc}/(N \times 2\pi)$ and $\Delta Q_{osc} = 0.51 - 0.49 = 0.02$, yields

$$|\epsilon| = 5.15757 \times 10^{-4},$$

• SWEEP 28,000 TURNS

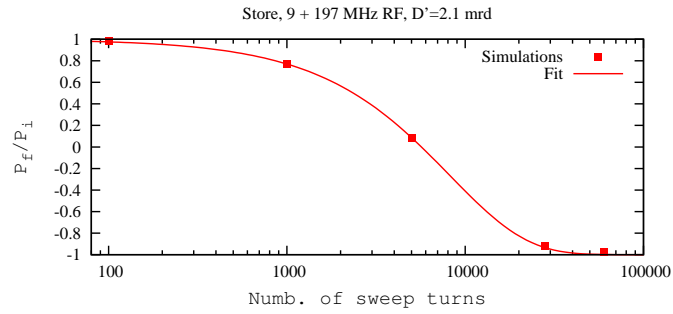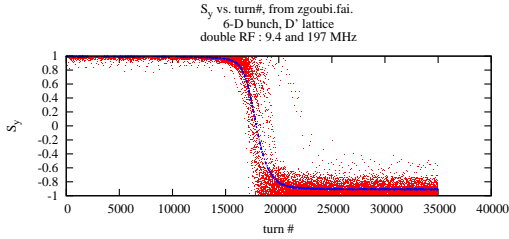

• SWEEP 5,000 TURNS

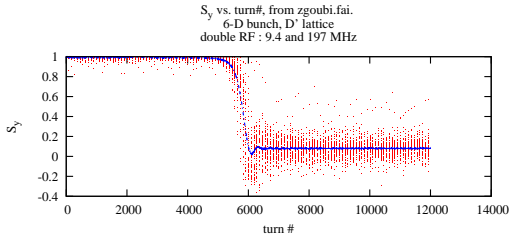

- On the other hand, the numerical simulation hypotheses, namely,

$$\psi_{osc} = (1 + G\gamma) \frac{B_{osc}L}{B\rho} = 5.86 \times 10^{-3}$$


given $G\gamma = 487$, $B\rho = 850$ T.m, $B_{osc}L = 0.0102$ T.m, and

$$\phi_0 = (1 + G\gamma) \frac{BL}{B\rho} = 0.5215 \text{ rd, } 45.1 \text{ deg}$$

given $BL = 0.7476 \times 1.83$ T.m, yield a resonance strength value within 2% of the matched value above, namely


$$\frac{\psi_{osc}}{\pi} \sin \phi_0 \sin \frac{\phi_0}{2} = 5.06345 \times 10^{-4}$$

• SWEEP 1,000 TURNS

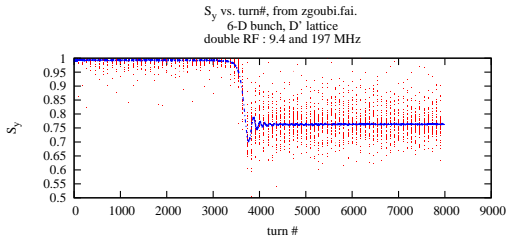

- The Table below compares the present simulation conditions for 99% spin flip efficiency, and Run 17 APEX conditions :

• SWEEP 500 TURNS

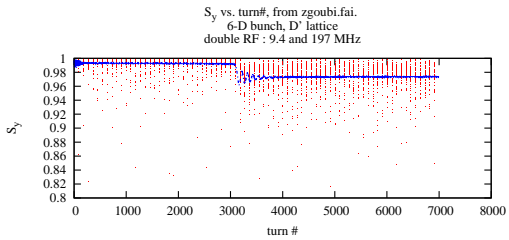

| | $B_{osc}L$ | ϕ_0 | ϵ | ΔQ_{osc} | minimal N for > 99% flip | duration of the sweep |
|-------------|------------|----------|---------------|------------------|-----------------------------|--------------------------|
| | (G.m) | (deg) | (10^{-4}) | | (turns) | (s) |
| simulations | 102 | 45.1 | 5.16 | 0.02 | 40,400 | 0.52 |
| APEX | 100 | 48.8 | 5.68 | 0.005 | 8,300 | 0.11 |

3.3 A summary table

Table 1 below summarizes results obtained for typical cases amongst the various spin flip simulations performed.

The quantities varied here are $\Delta D'$ and the number of turns of the sweep. Other parameters : RF frequency and voltage, ΔQ_{osc} , bunch size, etc., are as specified earlier at either injection, with in particular momentum spread $\Delta p/p \in [-1.5 \times 10^{-3}, +1.5 \times 10^{-3}]$ (Sec. 3.1) or store with momentum spread $\Delta p/p \in [-3 \times 10^{-4}, +3 \times 10^{-4}]$ (Sec. 3.2).

Note that due to the large beam size, in particular large momentum spread, up to 10% of the beam is lost in the 200,000 tracking cases. Large momentum spread could be the cause for the maximum efficiency of about 95% found in the 0.6-13 mrad range, this is to be investigated further.

Table 1: A summary of P_f/P_i values in some of the spin flip simulations performed. Initial polarization P_i is taken at the end of the 3000 turn AC-dipole up ramp, final polarization P_f is the asymptotic value after the ΔQ_{osc} sweep.

| Injection | | | | | |
|------------------|----------------------------------|-----------------|-----------------|-----------------|---------------|
| D' (mrad) | Number of turns of the ACD sweep | | | | |
| | 200,000 | 100,000 | 50,000 | 20,000 | 10,000 |
| 0.6 | -0.947 / 0.9995 | -0.837 / 0.9995 | | | |
| 4.8 | -0.946 / 0.9995 | | | | |
| 13 | -0.944 / 0.9995 | -0.814 / 0.9995 | -0.472 / 0.9995 | | 0.53 / 0.9995 |
| 63 | -0.449 / 0.9995 | | | +0.180 / 0.9995 | |
| Store | | | | | |
| D' (mrad) | Number of turns of the ACD sweep | | | | |
| | 60,000 | 28,000 | 5,000 | 1,000 | |
| 0.0 | -0.985 / 0.992 | | | | |
| 2.1 | -0.982 / 0.992 | -0.924 / 0.992 | | | |
| 22.5 | -0.967 / 0.992 | -0.908 / 0.992 | +0.080 / 0.992 | +0.763 / 0.992 | |


As summarized in Tab. 1, the simulations show weak dependence of spin flip efficiency on $\Delta D'$, namely (figure below),

- at injection, efficiency $\approx 94 \sim 95\%$ over the range explored $0.6 \leq |\Delta D'| \leq 13$ mrad,

- at store, efficiency $\approx 97 \sim 99\%$ over the range explored $0 \leq |\Delta D'| \leq 22$ mrad.

For the record, the number of turns of the “fast sweep”, respectively 200,000 and 60,000, has been determined by its yielding, in theory, 99% spin flip, see bottom right tables in pp. 9 and 11 respectively.

These results seem in contradiction with APEX measurements : polarization is lost during the sweep if $\Delta D'$ is not at mrad level or less [10, 11]. This needs further investigation.

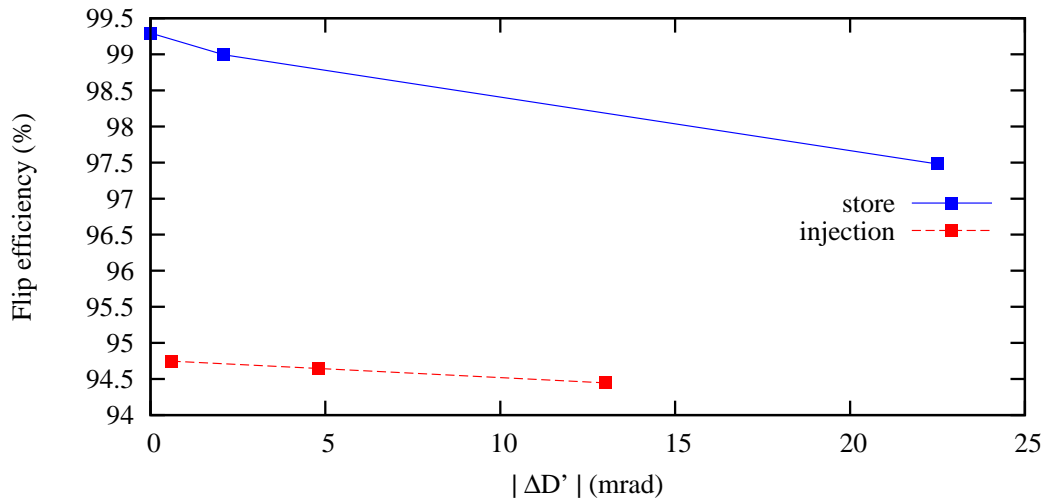

$\Delta D'$ dependence of spin flip efficiency.

4 Conclusions

These simulations show the following :

(i) All the simulations performed (much more than summarized in this note), covering various $\Delta D'$ values including non-D' lattice, various RF frequencies including double RF, various transverse and longitudinal beam sizes up to such sizes as to generate dynamical beam loss, show improved flip efficiency with resonance crossing speed $\alpha = \Delta Q_{\text{osc}}/2\pi N$ on the high side.

This has been confirmed experimentally,

- in a first trial at injection, $G\gamma = 45.5$, with sweep time decreased from 3 second as in usage (about 235,000 turns for a frequency span of 0.005, i.e., $\Delta Q_{\text{osc}}/\Delta t = 0.005/3 = 0.0017 \text{ s}^{-1}$), 92 % flip efficiency, down to 1 sec (0.005 s^{-1}) and further to 0.5 sec (0.01 s^{-1}) both yielding 97.5 % flip instead [10],

- in a second trial at store, $G\gamma = 487$, with a flip efficiency of 90 % for a 1 second sweep, and 97 % for 0.5 second sweep [11] with no indication that the latter is a lower limit.

(ii) APEX measurements at injection [10] show an optimal sweep between 0.5 and 1 second, in accord with simulations which yield ≈ 0.6 second for 99% flip efficiency given the APEX ΔQ_{osc} value (page 9). APEX measurements at store [11] indicate that the sweep duration could be decreased further below 0.5 second, in accord with simulation data that yield an optimal ≈ 0.11 second sweep for 99% flip efficiency given the APEX ΔQ_{osc} and ϕ_0 values (page 11).

The optimum is between two limits : number of turns N small enough (greater α) to avoid multiple crossing, large enough (smaller α) to ensure $2 \exp(-\frac{\pi}{2} \frac{|\epsilon|^2}{\alpha}) - 1 \approx -1$.

(iii) The numerical simulations show significant tolerance on $\Delta D'$, in the limit that δQ_s (Eq. 6) is maintained well within ΔQ_{osc} sweep range. This is illustrated in the injection case, $\Delta D' \leq 13 \text{ mrad}$ (p. 8 and Tab. 1, p. 12), which satisfies $\Delta D' < 70 \text{ mrad}$ so maintaining $\delta Q_s < \delta p/p \approx 1.5 \times 10^{-3}$ (bottom right plot in p. 8). In a similar manner at store, simulations with $\Delta D'$ up to 22 mrad ($\delta Q_s \approx 3.4 \times \Delta p/p \approx 0.001$) yield high efficiency spin flip (p. 11 and Tab. 1).

The numerical simulations indicate one thing in that respect :

- a non-small $\Delta D'$ value may not be in itself an overriding cause of the poor flip efficiency which seems correlatively obtained in the experiments : the mechanism of multiple crossing that large D' contributes inducing may be overcome for instance by faster sweep as discussed in (i) and (ii). Tests were planned at 255 GeV during the latest APEX, based on the fact that a 40 % flip efficiency had been obtained with 3 second sweep (and $|\Delta D'| = 3 \text{ mrad}$) [11], a value expected to be substantially improved with faster sweep, however APEX time allotted, time spent on tuning $\Delta D'$ optics, and other machine downtime did not allow verifying that.

Understanding the details of these spin flip dynamics simulations, and answering the various questions they raise, will require more investigations. This includes, as part of the plans, more simulations in the very spin flipper and bunch conditions of Run 17 APEX.

References

- [1] J. Kewisch et al., Correction of the spin chromaticity in RHIC, C-A/AP/478 (2013).
- [2] M. Bai and T. Roser, Full Spin Flipping in the Presence of Full Siberian Snake, Phys. Rev. ST Accel. Beams 11, 091001 (2008).
- [3] S. R. Mane, Comment on "Full spin flipping in the presence of full Siberian Snake", Phys. Rev. ST Accel. Beams 12, 099001 (2009).
- [4] M. Bai, W. W. MacKay, and T. Roser, Comment on "Spin manipulation of 1:94 GeV=c polarized protons stored in the COSY cooler synchrotron", Phys. Rev. ST Accel. Beams 12, 099001 (2009).
- [5] Rhic Spin Flipper Project Status, M. Bai, C. Dawson, J. Kewisch, A. A. Poblaguev, P. Oddo, Brookhaven National Laboratory, Upton, NY (2015)
- [6] M. Bai et al., Impact on Spin Tune From Horizontal Orbital Angle Between Snakes and Orbital Angle Between Spin Rotators, C-A/AP/334 (10/1/2008).
- [7] RHIC SPIN FLIPPER STATUS AND SIMULATION STUDIES, M. Bai et al., Procs. 2011 PAC, NY.
- [8] The ray-tracing code Zgoubi, F. Méot, NIM A 767 (2014) 112-125.
https://zgoubi.sourceforge.io/ZGOUBI_DOCS/Zgoubi.pdf
- [9] NERSC computing, on web : <http://www.nersc.gov/>
- [10] H. Huang, Spin meeting minutes, 26 May 2017, BNL C-AD. <http://www.cadops.bnl.gov/AP/spinmeeting.htm>
- [11] H. Huang, Spin meeting minutes, 27 July 2017, BNL C-AD. <http://www.cadops.bnl.gov/AP/spinmeeting.htm>