

Half Integer Stopband Width of the Booster

C. Gardner

April 1993

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

AGS STUDIES REPORT	
Date(s) of Study: 4/14/93 and 4/17/93	Time(s):
Beam: 4/14/93: USER1 High B-dot inj. (70 G/ms); 4/17/93: USER3 Low B-dot inj. (30 G/ms); Intensity 10^{12} ppp, 70° -5 turns	
Experimenter(s): C. Gardner and Y. Shoji	
Reported By: Y. Shoji	
Subject: Half Integer Stopband Width of the Booster	

I. MOTIVATION

There are two motivations. One is a proposal by Machida (SSC Laboratory) to measure the beta function. Unfortunately, the quadrupole backleg windings in the AGS Booster do not have individually separated power supplies. Therefore, we can only measure the mean beta function. When we use the tune control current as a parameter, the experiment is identical to the measurement of the stopband width of the half-integer resonance.

The other motivation for the study is the mystery of the residual beam loss on the half-integer resonance line. At three resonances in the AGS Booster, $2Q_h=9$, $2Q_v=9$, and $Q_h+Q_v=9$, even after the optimization of the resonance correction parameters, there still exists considerable beam losses. The strange thing is that they are much larger than the loss on the uncorrected third order resonances ($3Q_h=14$, $3Q_v=14$, $Q_h+2Q_v=14$, and $2Q_h+Q_v=14$). We want to confirm that the half-integer resonances are corrected and that higher order resonances (in particular, the 4th order structure resonances, $4Q_h=6 \times 3$, $4Q_v=6 \times 3$, and $2Q_h+2Q_v=6 \times 3$) are for the beam losses.

II. PRINCIPLE

Because the beta function is modulated near the stopband, we expect the ratio of the tune and the unperturbed tune (which is roughly proportional to the tune control quadrupole current) to change.

$$4\pi \delta Q = \int \delta K \beta ds$$

The tune near the stopband is approximated as

$$\cos(2\pi Q) = \cos(2\pi Q_0) - (2\pi \Delta Q)^2/8.$$

Here Q and Q_0 are perturbed and unperturbed tunes. At this time, they correspond to measured tune and set value, respectively. ΔQ is the half-integer resonance stopband width.

III. METHOD

The method used was to change the horizontal tune very slowly and let it cross the horizontal half-integer resonance, $2Q_h=9$. The trace in the tune space is shown in Figure 1. Next, the horizontal tune change was measured with the tune meter.

The crossing speed was $dQ/dt = 0.004$ ms. The beam intensity was 7×10^{11} ppp. The incoherent tune spread from the space charge is estimated to be 0.01. The chromaticities were corrected to zero. The residual coherent tune spread observed on the FFT spectrum of the tune meter was 0.008 (see Figure 2).

The stopband correction strings were turned off. The optimized values were $\cos 9x=600$ and $\sin 9x=100$. The calculated stopband width from the correction parameters was 0.007. The tune meter measured dR for about 1 ms after the kick. The resolution of the tune meter was 0.001. The fluctuation of the monitored current of the horizontal tune control power supply was $\delta Q_h = 0.005$ p-p.

IV. RESULTS

The results of the study performed on April 17 are shown in Figure 3. The stopband width was much smaller than the sensitivity of the measurement. The oscillation of the data points are thought to be from the ripple of the power supplies. The beam was lost before the measured tune had reached to the half integer (see Figure 4). The real tune is thought to be smaller than the measured tune because of the incoherent tune spread by the space charge.

V. DISCUSSION

The calculated stopband width of $2Q_v=9$ is only a little bit larger than that of $2Q_h=9$. The half-integer stopband widths are very small and undetectable. If the power supplies in the quadrupole backleg windings were separated, we could hardly detect the modulation of beta functions. The beam loss due to the half-integer stopband is large because the stopband is narrow but very strong.

We have some ways to improve the sensitivity of the measurement, but the required sensitivity to detect the residual stopband width is better than 0.0001. It is almost impossible. We will have to do other kinds of studies to know whether the residual loss is due to the half-integer stopband or not.

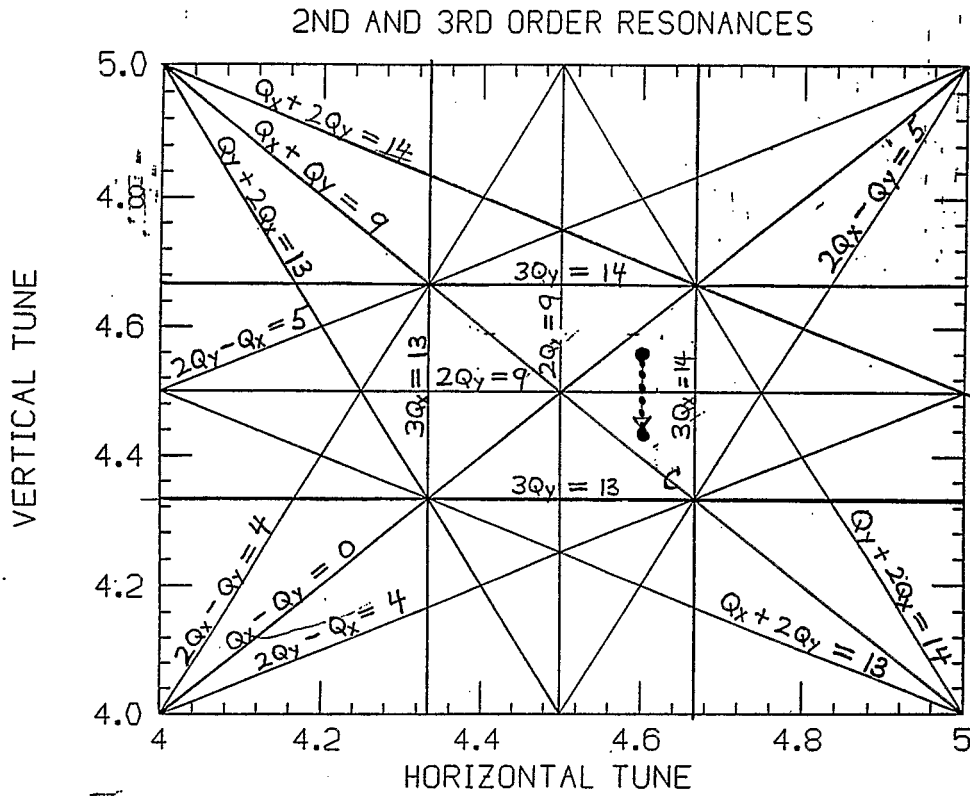


Figure 1. Trace of the moving tunes in a tune space.

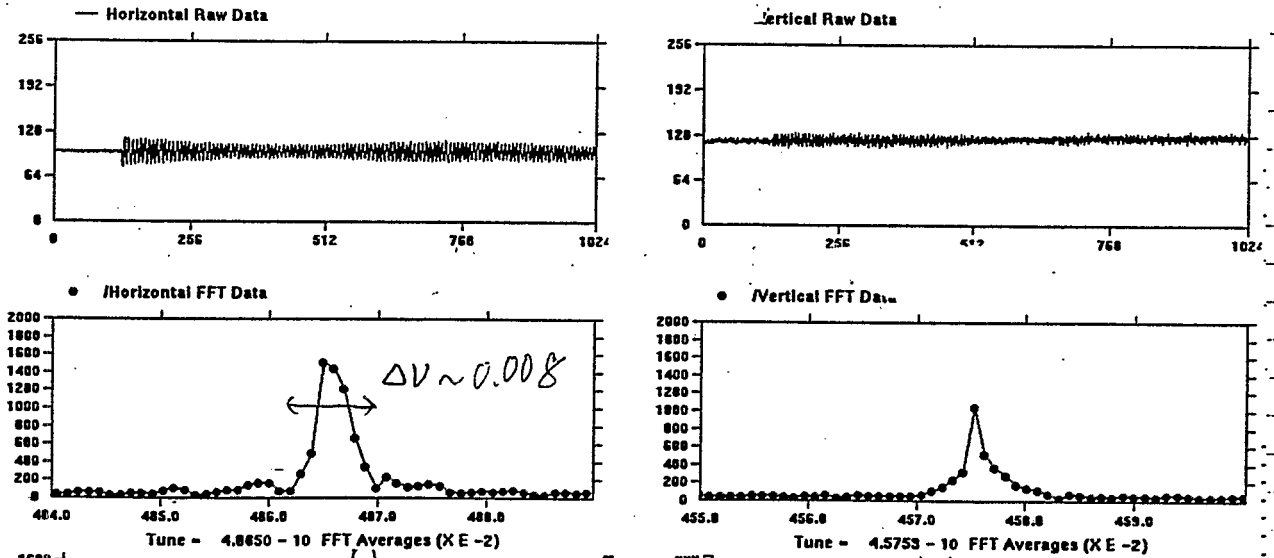


Figure 2. Spread of the betatron frequencies. The chromaticities of both H and V planes are corrected to 0. FFT spectrum are results of several times average.

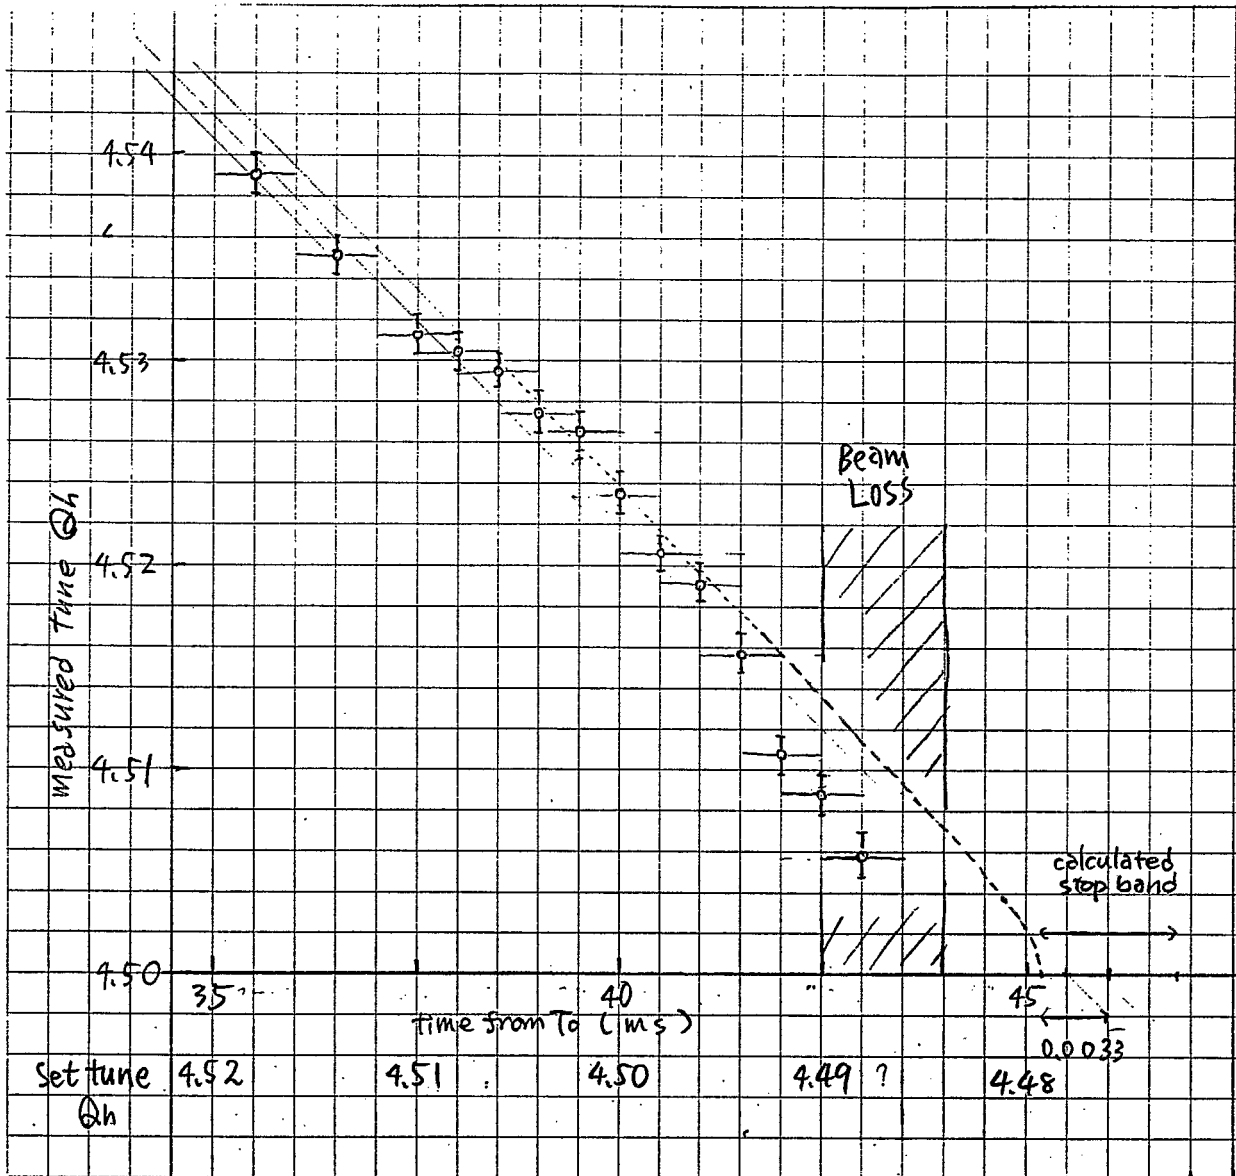


Figure 3. Set tune (Q_0) and measured tune (Q). Horizontal and vertical errors bars of data points are the resolution of time and tune of the tune meter. Broken line is the tune obtained using Equation (1) with the stopband width $\Delta Q = 0.0066$.

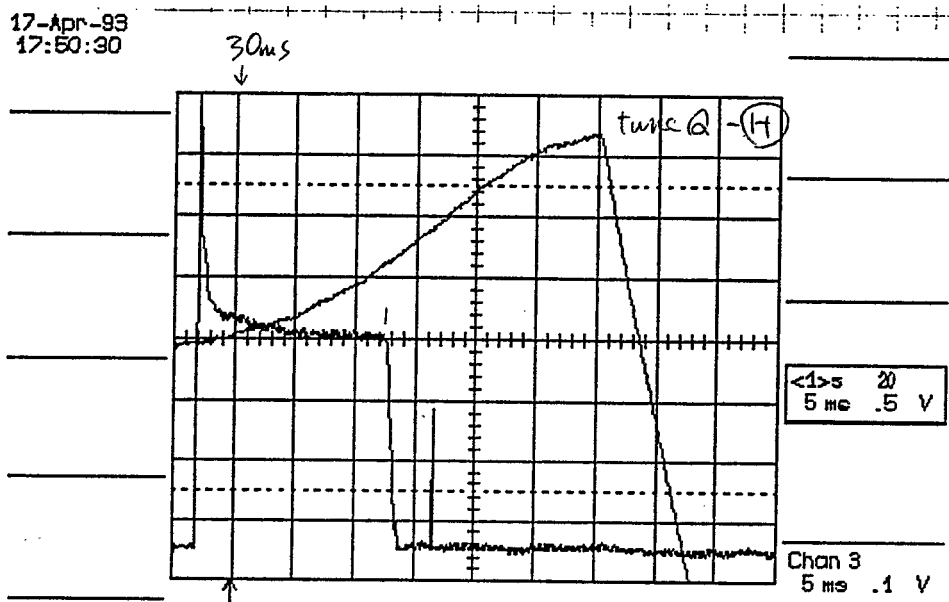


Figure 4. Beam current in the Booster.