

Passing Transition with a Double Phase Jump

L. Ahrens

November 1985

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

AGS Studies Report

Date(s) November 7, 1985 Time(s) 1600-1900
Experimenter(s) L. Ahrens, E. Gill, E. Raka
Reported by E. Raka
Subject Passing Transition With a Double Phase Jump

Observations and Conclusion

The beam intensity was reduced to 5.2×10^{12} and the "integrator" time was set to 2540 or about 305 msec from transition. This reduces the d.c. loop gain of the radial control system. The latter was adjusted to give essentially zero signal at transition by using the L-20 current transformer for normalization and adding 12' to the delay cable.

Next, a clamping circuit was installed between the output of the radial position chassis and the input to the phase shifter. This made it possible to effectively open the radial loop at transition and then close it subsequently. In order to pass transition rapidly, the phase jump was adjusted to $(\pi/2 - \phi_s)$ and held there while the radial loop was opened. Then about 2.5 msec later the radial signal was unclamped and a fast radius shift signal was introduced. The latter was adjusted to partially cancel the radial error signal so as to produce an additional phase jump of $(\pi/2 - \phi_s)$ degrees. The result is passage through transition at the maximum possible rate with an accompanying rapid outward radius shift (≈ 1.5 cm at a β_{\min}) with no additional radial excursion.¹

The signals in Figure 1 show the behavior of the radius, phase, and radial error signal. Also shown is the current transformer at 3.3×10^{11} /division. As can be seen, the loss is $\approx 10^{11}$ at 5.2×10^{12} and occurs more than 5 msec after transition. This is several milliseconds later than seen on October 23, 1985, when the radial loop was used to carry the beam through transition (see AGS Studies Report No. 191). The loss is slightly less for the method used here and the bunches are somewhat cleaner as can be seen in Figure 2. Again, the time was 470 msec from injection peaker where the momentum is 21.8 GeV/c, not 22.8 as reported in Studies Report No. 191. The bunches at 21.8 GeV are still ≈ 25 nsec wide corresponding to ≈ 1 eV sec area. Figure 3 shows

the wall current monitor at 5 ms/division with ≈ 300 MHz bandwidth. The presence of bunch shape oscillations indicates some mismatch and hence potential dilution which on the basis of the 470 msec measurements, cannot be very great. Figure 4 shows the wall current monitor signal as seen on a 1 GHz bandwidth scope. We see the same bunch at approximately 1 msec intervals as it passes through transition. The two-step phase jump is readily apparent as is the onset of a microwave instability just before the second jump. Triggering is by counting down the rf frequency obtained from the cavity voltage.

This method makes it possible, therefore, to obtain the highest density bunches possible at high energies. With such bunches, studies of longitudinal or transverse impedances can be more readily be carried out.

¹E. Raka, Betatron Frequency Jump at Transition in the Brookhaven AGS, AGS Div. 70-1.

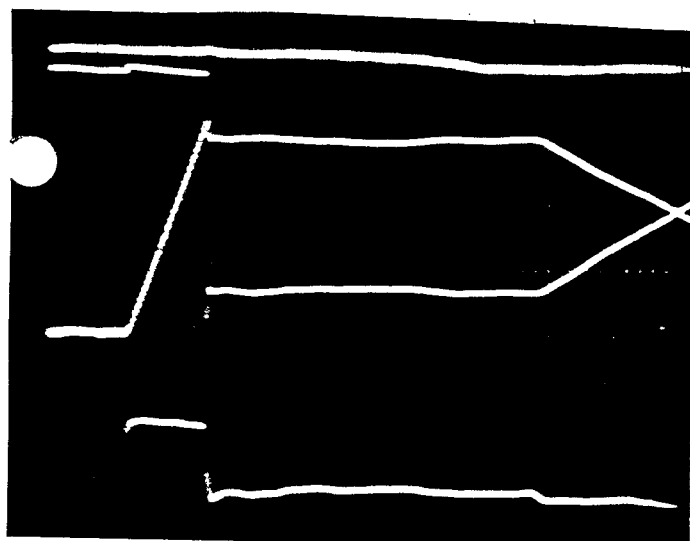


Figure 1 2 msec/div.

← Current x FMR $3.3 \times 10^{11}/div$

← Radial Error

← Radial Pos.

← Zero for Phasedet. and RadPos.

← Phase Detector $50^\circ/div$

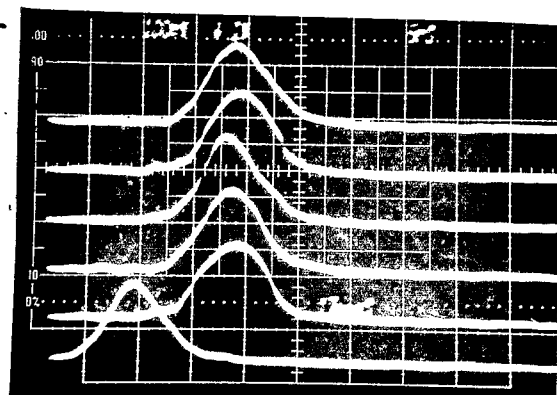


Figure 2 10 nsec/div.

2 msec.
7

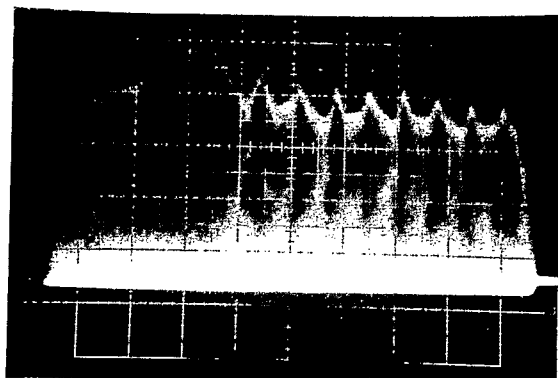


Figure 3 5 msec/div.

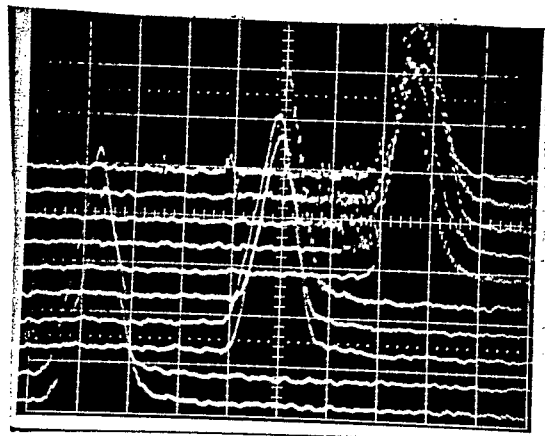


Figure 4 10 nsec/div.

1 msec.
7