



BNL-104641-2014-TECH

AGS/AD/Tech Note No. 214; BNL-104641-2014-IR

BEAM LINE RAY TRACING

J. Ryan

April 1985

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

AGS Department
BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, New York 11973
Accelerator Division Technical Note

No. 214.

BEAM LINE RAY TRACING

John Ryan
April 26, 1985

Introduction

This technical note reviews how one may trace a beam through a beam transport line from the known magnetic element transport matrices. It shows that only in a rare case may one calculate the beam position in a downstream portion of a line from the known input position and the matrix product of the elements between the input and output. A set of corollaries are obtained that one needs only to remember to trace a beam thru any beam line. Procedures are given to treat any type of magnetic element offset, tilt, or rotation in the beam line.

The Drift Space

To illustrate the procedure necessary to trace a beam thru different magnetic elements, the drift space will be studied thoroughly. One may argue correctly that this procedure is not necessary for simple lines, but it is the only way to treat bending magnets with edge focussing, gradient magnets, or magnets with horizontal or vertical offsets.

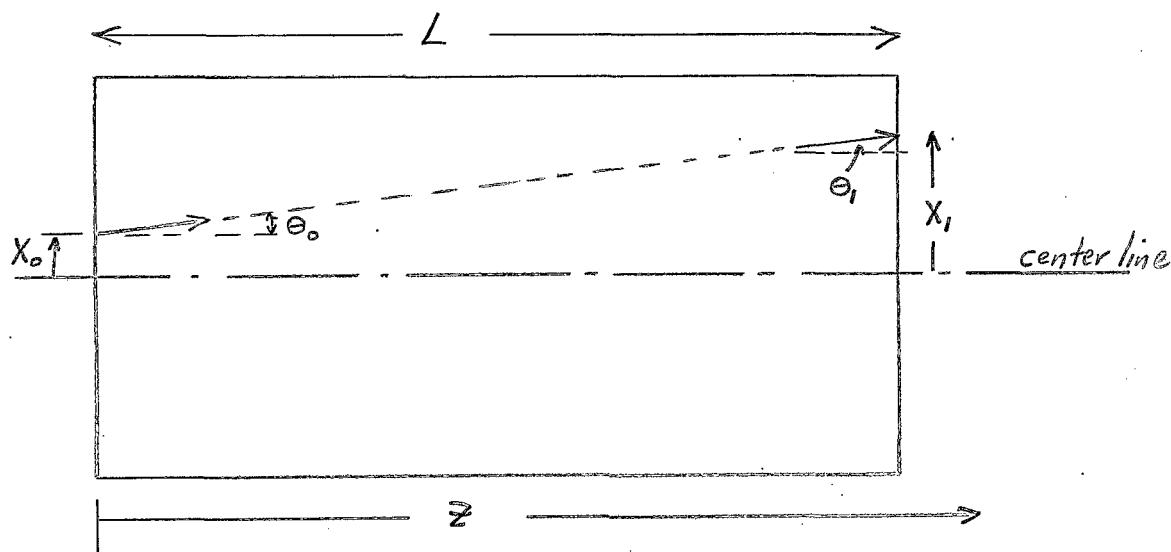


FIGURE 1 -- DRIFT SPACE

Figure 1 shows a drift space of length L. By definition no forces are exerted on the particles in a drift space, and as a result, the particles travel in a straight line. Initially only two dimensions will be used:

Defining:

x_o ---- x displacement of the beam from the center line of the drift space at the entrance to the drift space (inches).

θ_o ---- angle, measured with respect to the center line of the drift space at the input, (radians)

One may easily write;

$$x_1 = x_o + L \tan \theta_o \quad (1)$$

$$\theta_1 = \theta_o$$

where x_1 and θ_1 are the values at the output of the drift space.

This value is exact and can be used for ray tracing. However, in a transport line one is also interested in the beam size as well as the beam position. In fact, in beam line design, one is more interested in beam size since this determines the beam line apertures.

It has been shown in beam line design that if all the elements are described with linear matrices, a simple matrix equation can be used to find beam sizes in a lossless beam line. As a result, one always tries to express equations like equation 1 in matrix form. It is not necessary for ray tracing, but it is necessary for beam size determinations.

Matrix form requires a form as:

$$x_1 = Ax_o + B\theta_o \quad (2)$$

$$\theta_1 = Cx_o + D\theta_o$$

where A, B, C, and D are independent of x_o and θ_o .

One can see that equation 1 can be put in the matrix form if:

$$\tan \theta_o \approx \theta_o \quad (3)$$

This occurs for small angles.

Thus the well known transport matrix form for a drift space becomes:

$$x_1 = 1x_o + L\theta_o \quad \text{inches} \quad (4)$$

$$\theta_1 = 0x_o + 1\theta_o \quad \text{radians}$$

If milliradians are used, as is common:

$$x_1 = 1x_o + \frac{L}{1000} \theta_o \quad (5)$$

$$\theta_1 = 0x_o + 1\theta_o$$

Corollary #1 can now be stated:

- #1 The transport matrix equation representation of a magnetic element is not the exact description of the element. It is only a simplification.

The distance and angle for the drift space are measured with respect to the center line of the drift space. This center line will now be referred to as the element centroid as in standard transport practice.

Corollary #2 can now be stated:

- #2 To use the transport matrix, one must know where the centroid is for that matrix. Knowing only the transport matrix is insufficient information to solve beam ray tracing problems.

Matrix form and matrix multiplication can be used to transport a particle or a beam from the input of a magnetic element to the output of the magnetic element.

Equation 4 can be written in matrix form as:

$$\begin{bmatrix} vx_1 \\ vx_0 \end{bmatrix} = \begin{bmatrix} A & B \\ C & D \end{bmatrix} \times \begin{bmatrix} vx_0 \\ vx_0 \end{bmatrix} \quad (6)$$

where:

$\begin{bmatrix} vx_0 \\ vx_0 \end{bmatrix}$ is the vector describing the input parameters:

For Figure 1:

$$\begin{bmatrix} vx_0 \\ vx_0 \end{bmatrix} = \begin{bmatrix} x_o \\ \theta_o \end{bmatrix} \quad (7)$$

The input vector [VX0] can also be a 5 dimensional vector:

$$[VX0] = \begin{bmatrix} x_0 \\ \theta_0 \\ y_0 \\ \phi_0 \\ \delta_0 \end{bmatrix} \quad (8)$$

where x_0 , θ_0 , y_0 , ϕ_0 , and δ_0 have standard transport definitions.

x_0 -- horizontal displacement of input ray, in inches, with respect to the assumed central trajectory or centroid.

θ_0 -- the angle that this input ray makes in the horizontal plane with respect to the central trajectory or centroid.

y_0 -- vertical displacement of input ray with respect to central trajectory or centroid.

ϕ_0 -- the angle that this input ray makes in vertical plane with respect to central trajectory or centroid.

δ_0 -- $\Delta p/p$ = fractional momentum deviation (%) of this input ray and the assumed central trajectory or centroid.

If a 5 dimensional vector is used, the transport matrix for the magnetic element also becomes a 5x5 square matrix, R.

$$[R] = \begin{bmatrix} R_{11} & R_{12} & R_{13} & R_{14} & R_{15} \\ R_{21} & R_{22} & R_{23} & R_{24} & R_{25} \\ R_{31} & R_{32} & R_{33} & R_{34} & R_{35} \\ R_{41} & R_{42} & R_{43} & R_{44} & R_{45} \\ R_{51} & R_{52} & R_{53} & R_{54} & R_{55} \end{bmatrix} \quad (9)$$

The output vector then is a 5 dimensional vector.

The standard vector equation for a drift space or any other magnetic element is the following well known equation:

$$[VX1] = [R] \times [VX0] \quad (10)$$

It should be emphasized that this gives the vector $[VX1]$, at the end of the magnetic element knowing the vector $[VX0]$ at the input of the element. The centroid and the $[R]$ matrix must be known. Nothing is known about the beam outside this element.

The Beam Pipe Element

A new transport line element will now be introduced to keep track of element centroids, called a Beam Pipe element. All beam line instrumentation such as swics or flags are assumed to be located only in the Beam Pipe element. All commonly known transport elements are separated from each other by Beam Pipe elements. Thus, two drift spaces are not allowed to be connected. They must be connected thru a Beam Pipe element.

A Beam Pipe element has a unity matrix. If the input to the Beam Pipe is the vector $[VBP0]$, the output is the vector $[VBP1]$ and:

$$[VBP1] = [VBP0] \quad \text{Equation (11)}$$

always in the same Beam Pipe element.

The centroid of the Beam Pipe element is the center line of the beam pipe.

A third corollary may be stated:

- #3 All magnetic elements in a transport line are separated from each other by the unity matrix Beam Pipe element.

To show the procedure for solving beam steering problems, several examples using a drift space will be used.

Example #1

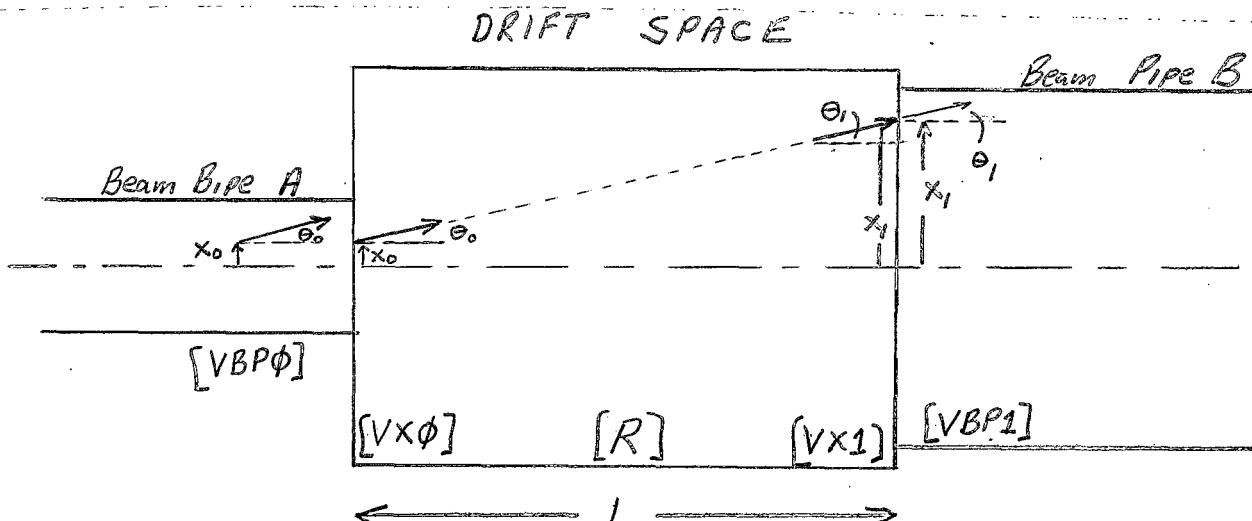


FIGURE 2

In the Beam Pipe A

(12)

$$[VBPO] = \begin{bmatrix} x_0 \\ \theta_0 \\ 0 \end{bmatrix}$$

in the horizontal plane
only

Transforming this vector to the drift space, the vector at the input of the drift space is [VX0].

$$[VX0] = [VBPO] = \begin{bmatrix} x_0 \\ \theta_0 \\ 0 \end{bmatrix} \quad (13)$$

Moving thru the drift space using the transport matrix [R]

$$[VX1] = [R] \times [VX0] \quad (14)$$

Transforming this vector to beam pipe B

$$[VBP1] = [VX1] = \begin{bmatrix} x_1 \\ \theta_1 \\ 1 \end{bmatrix} \quad (15)$$

This trivial example illustrates the four important vectors [VBPO], [VX0], [VX1] and [VBP1].

Example #2

Consider that the drift space is offset from the beam pipe in the horizontal direction by the distance Δ .

DRIFT SPACE

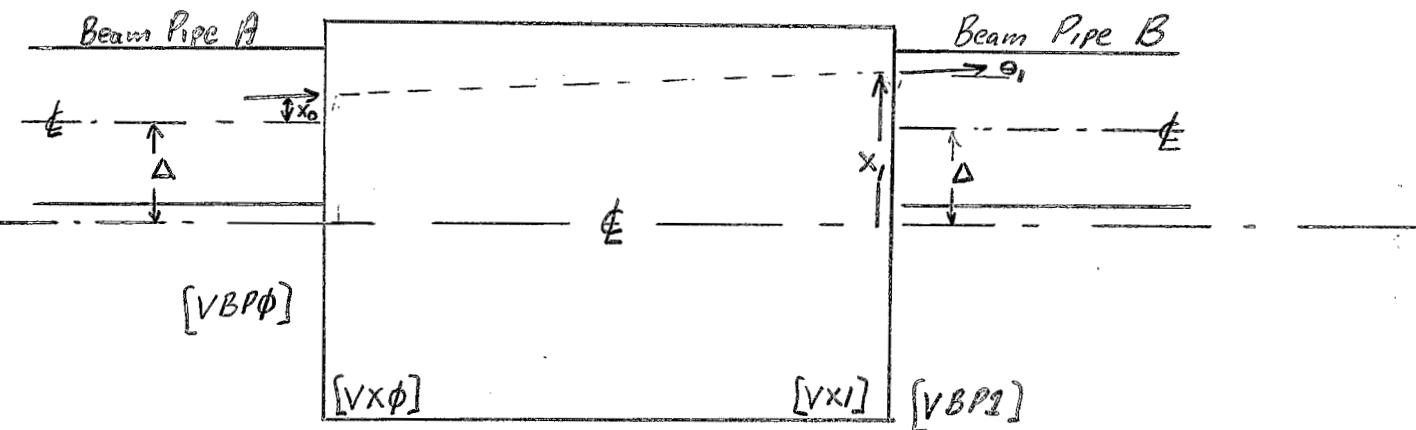


FIGURE 3

In the Beam Pipe A

$$[VBPO]_A = \begin{bmatrix} x_0 \\ \theta_0 \end{bmatrix} \quad (16)$$

Because of the offset:

$$[VX0] = \begin{bmatrix} x_0 + \Delta \\ \theta_0 \end{bmatrix} \quad (17)$$

$$[VX1] = [R] \times [VX0] = [R] \times \begin{bmatrix} x_0 + \Delta \\ \theta_0 \end{bmatrix} = \begin{bmatrix} x_1 \\ \theta_1 \end{bmatrix} \quad (18)$$

$$[VBP1] = \begin{bmatrix} x_1 - \Delta \\ \theta_1 \end{bmatrix} \quad (19)$$

The output vector in beam pipe B is also shifted from the $[VX1]$ vector at the output of the drift space.

It is true that since certain elements of the drift space $[R]$ matrix are unity or zero, that these four steps could be combined. However, in general, one must always follow these four steps for each magnetic element.

Corollary #4 can now be stated:

- #4 To trace a beam from the input beam pipe to the output beam pipe, four vectors $[VBPO]$, $[VX0]$, $[VX1]$, and $[VBP1]$ must be found for each element in the beam line.

Example #3

Consider that the element is rotated in the horizontal plane by an angle α .

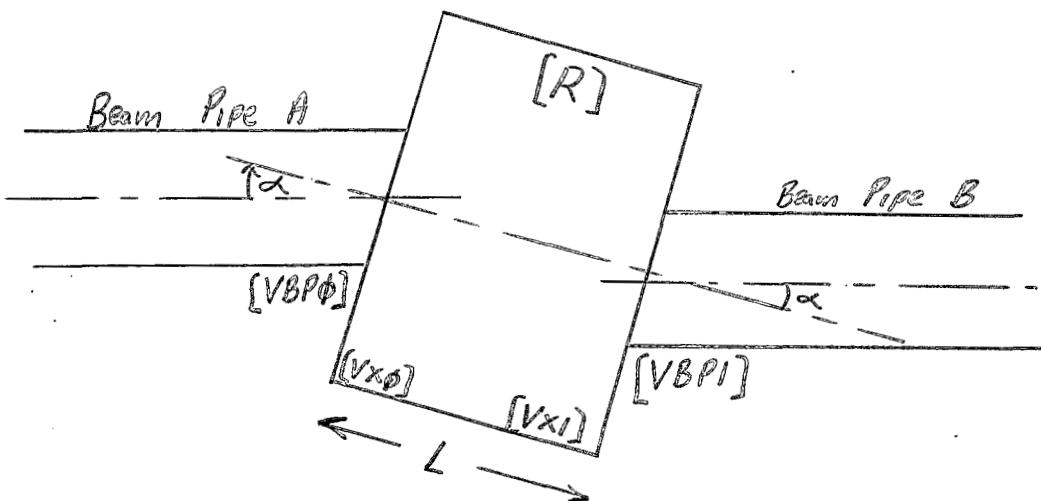


FIGURE 4

Actually, the important fact is not that the element is rotated, but that the centroid of the element makes an angle α with the centroid of the beam pipe. The centroid in some elements, as in bending magnets, will move even though the physical magnet is not moved.

Following Corollary #4.

$$[VBP0] = \begin{bmatrix} x_0 \\ \theta_0 \end{bmatrix} \quad (20)$$

$$[VX0] = \begin{bmatrix} x_0 \cos \alpha \\ \theta_0 + \alpha \end{bmatrix} \quad (21)$$

For small angles a simplification may be made, but is not essential:

$$\cos \alpha = 1$$

$$[VX0] = \begin{bmatrix} x_0 \\ \theta_0 + \alpha \end{bmatrix} \quad (22)$$

$$[VX1] = [R] \times \begin{bmatrix} x_0 \\ \theta_0 + \alpha \end{bmatrix} = \begin{bmatrix} x_1 \\ \theta_1 \end{bmatrix} \quad (23)$$

$$[VBP1] = \begin{bmatrix} x_1 / \cos \alpha \\ \theta_1 - \alpha \end{bmatrix} \quad \text{or for small } \alpha \quad (24)$$

$$[VBP1] = \begin{bmatrix} x_1 \\ \theta_1 - \alpha \end{bmatrix} \quad (25)$$

If the last equation is expanded:

$$x_{VBP1} = x_1$$

$$\theta_{VBP1} = \theta_1 - \alpha$$

one can see that this can not be expressed as a matrix equation, i.e., one can not write:

$$x_{VBP1} = Ax_1 + B\theta_1$$

$$\theta_{VBP1} = Cx_1 + D\theta_1$$

but must write

$$\theta_{VBP1} = Cx_1 + D\theta_1 - \alpha$$

One can conclude that if the centroids for all the magnetic elements are not aligned, one can not use matrix multiplication to find the output vector from the product of several element matrices and the input vector. It is necessary to step thru the beam line element by element.

However, the equations for each of the elements do not have to be derived since the transport matrices for all elements have been evaluated. It is necessary to know where the centroid is for each of the elements so that one can move from the beam pipe into the element or from the element to the beam pipe.

The Quadrupole Matrix

A quadrupole is a four pole magnet as shown in Figure 5.

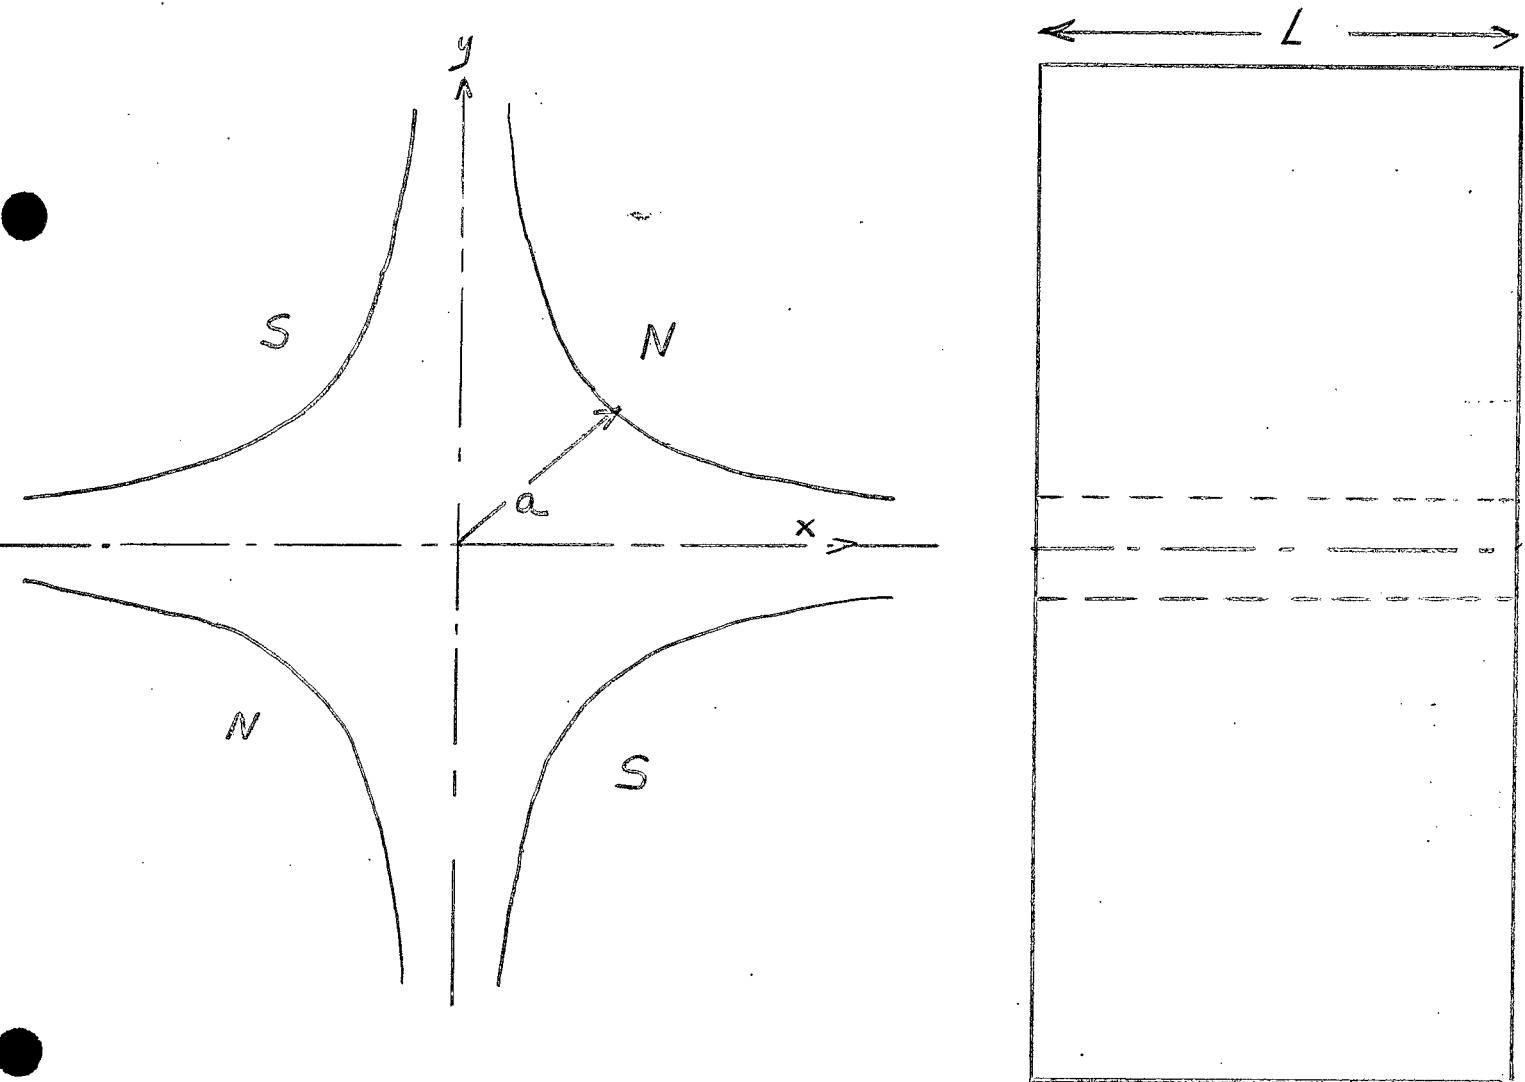


FIGURE 5

For a pure quadrupole field:

$$B_x = \frac{B_0 y}{a}$$

where B_0 is the field at the pole and
a is the pole radius

$$B_y = \frac{B_0 x}{a}$$

The length of the quad is L.

If one knows the input vector to the quad, [VX0], one can solve for the output vector [VX1] using the above field equations. One must define a centroid for the quadrupole and, for ray tracing, this can be located anywhere within the quad, within reason. For example, the physical bottom of the quad could be the centroid location. However, as discussed for the drift space, it is desired to be able to express the output vector as a product of an input vector and an element matrix. This is necessary for beam size determination but not for beam steering. Penner has found that if the centroid of the magnet is the optical or physical center of the ideal quad, the expression relating the output vector to the input vector is a square matrix ... the commonly known Quadrupole Transport Matrix.

$$[VX1] = [R] \times [VX0] \quad \text{where} \quad (9)$$

$$R = \begin{bmatrix} \cos (KL) & \frac{1}{K} \sin (KL) & 0 & 0 & 0 \\ -K \sin (KL) & \cos (KL) & 0 & 0 & 0 \\ 0 & 0 & \cosh (KL) & \frac{1}{K} \sinh (KL) & 0 \\ 0 & 0 & K \sinh (KL) & \cosh (KL) & 0 \\ 0 & 0 & 0 & 0 & 1 \end{bmatrix}$$

$$K = \sqrt{\frac{B_0 / a}{(P/e)}} \quad (P/e) = \text{rigidity} = 1313.24 \text{ P with} \\ P \text{ in Gev/c and } \frac{B_0}{a} \text{ in KG/in.}$$

L - length in inches.

The centroid is located in the center of the quad.

Following Corollary #3, the output beam can be found for any location of the quad. If the quad axis is offset from the beam pipe axis, [VX0] is found from the offset and [VBPO]. The quad can also be rotated or tipped. It is only necessary to know the distance between the centroid of the beam pipe and the quad centroid.

The Dipole Matrix

The most confusing element for beam line tracing was found to be the simple dipole. The reason for this confusion was a lack of knowledge of where the centroid for a dipole actually is. To transform the Beam Pipe vector, [VBPO] into the input element vector, [VX0], one needs to know the location of the Beam Pipe centroid and the dipole magnet centroid.

The wedge magnet matrix was first found by Penner. His derivation will now be outlined so that the most essential results can be shown. He first assumed a wedge magnet and then added corrections for a rectangular magnet. His definition of a wedge magnet is a magnet in which the central trajectory or centroid enters and leaves the magnet perpendicular to the face of the magnet. This is shown in Figure 6. The magnet field is assumed constant and in the vertical direction. As a result when the beam enters the magnet, it follows the arc of a circle in the radial or horizontal plane with a radius of curvature of ρ .

It should be emphasized that this is not a difficult problem if only beam ray tracing is considered. The center of the coordinate system or the centroid could be taken as the bottom of the magnet and the output ray location and angle could be found. The problem, however, is to be able to express the output angle and position as a matrix product of the input angle and position. Penner solved this problem by measuring distance and angle from a special ray called a central trajectory or centroid. It should be apparent that as the current changes in the magnet, the bend angle α will change. Thus, if the components of [VBPO] are fixed, the components of the [VX0] vector will change. This was the reason for introducing the Beam Pipe element.

WEDGE MAGNET

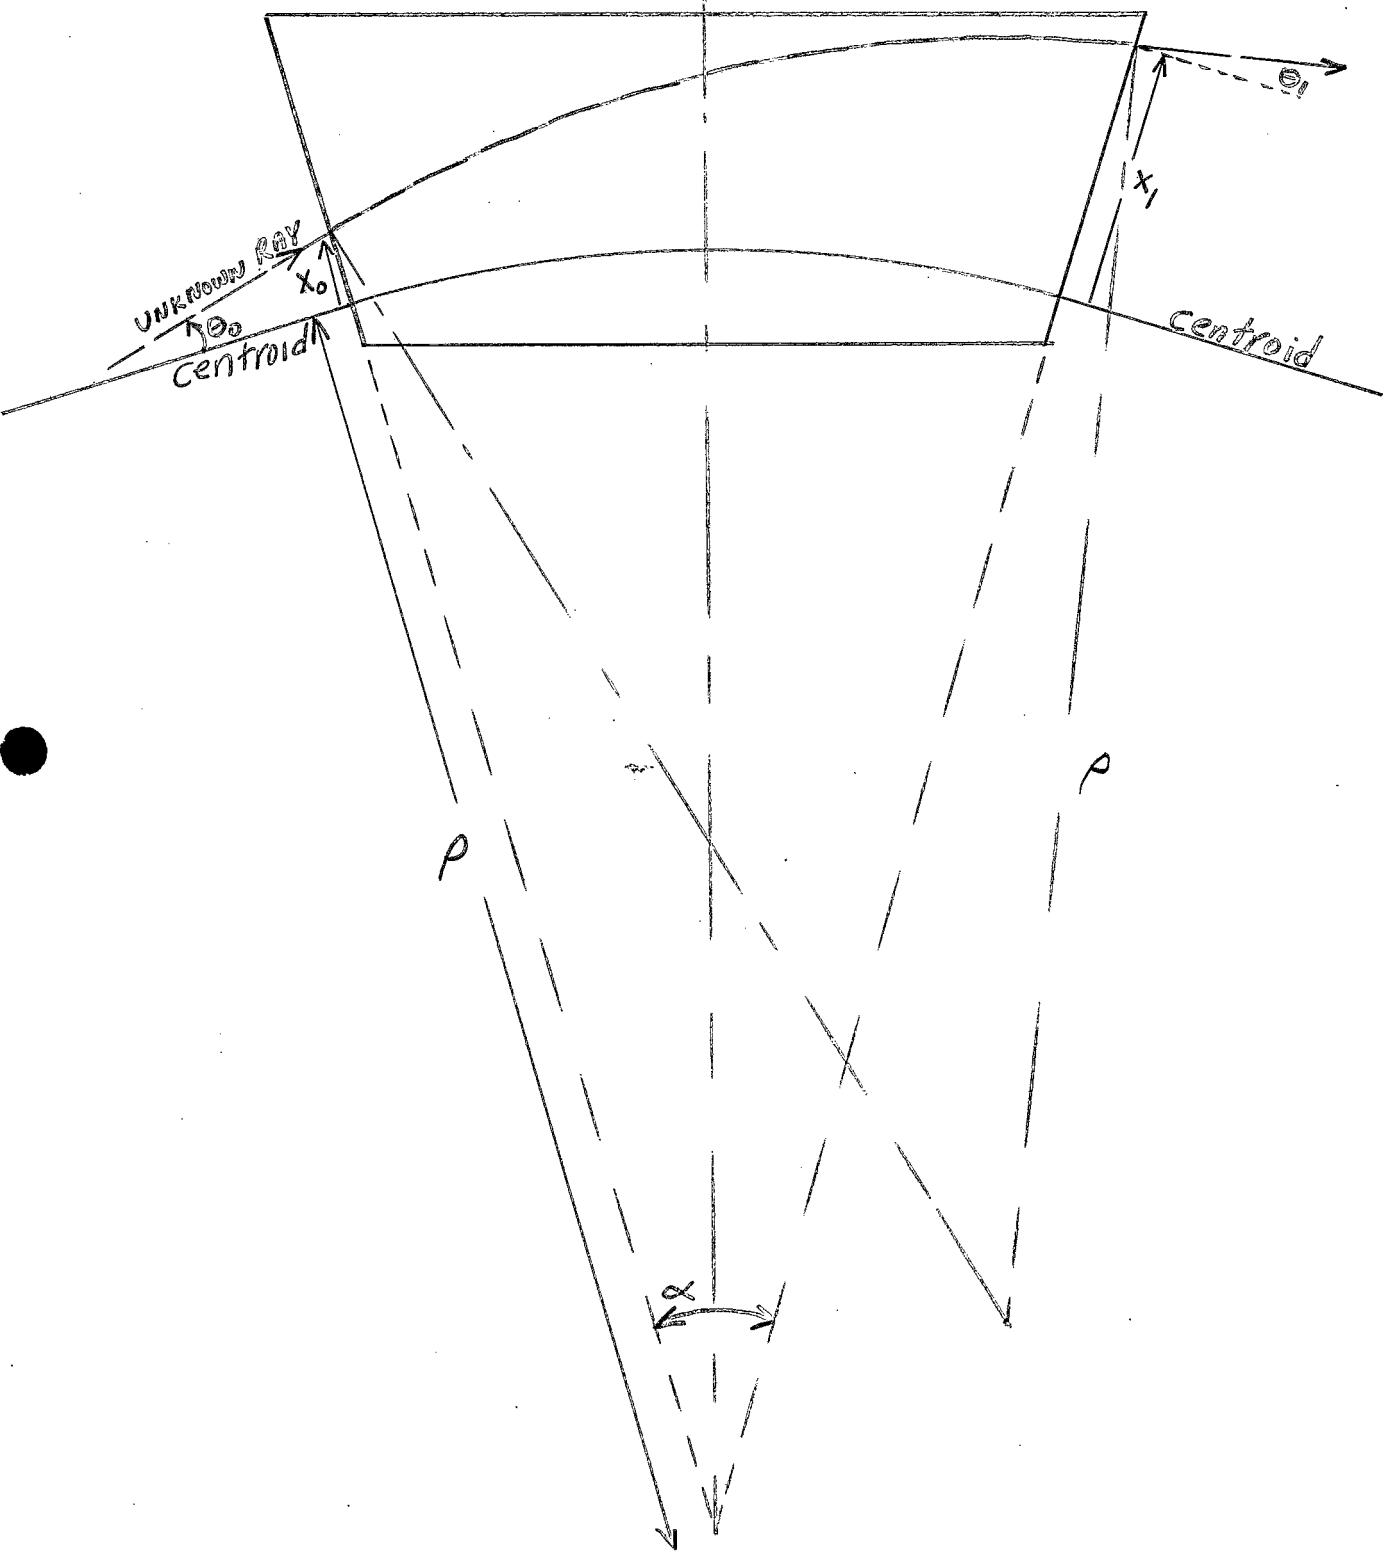


FIGURE 6

Figure 6 shows the components of $[VX_0]$ which is the vector at the input of the wedge dipole

$$VX_0 = \begin{bmatrix} X_0 \\ \theta_0 \end{bmatrix}$$

One wants the components X_1 and θ_1 of the output vector. Penner assumes that the unknown ray can also have a slightly different momentum, $P + \Delta P$, from the central ray or centroid. If the effective length of the magnet is L_{eff} (inches) and the field is B (kilogauss) then:

$$2 \sin \frac{\alpha}{2} = \frac{B L_{eff}}{(P/e)}$$

where (P/e) is the rigidity of the particles in (Kilogauss-inches).

$$\rho = \frac{L_{eff}}{\alpha} \quad \text{for small bending angles.}$$

$$\frac{\Delta P}{P} = \frac{\Delta \rho}{\rho}$$

Following Penner's procedure, and correcting the misprint in his equation 23, one obtains the exact results:

$$\sin \theta_1 = \frac{(\rho + \Delta \rho) \sin (\theta_0 + \alpha) - (\rho + X_0) \sin \alpha}{(\rho + \Delta \rho)}$$

and

$$\begin{aligned} X_1 &= X_0 \cos \alpha - \rho \cos (\alpha + \theta_0) - \Delta \rho \cos (\alpha + \theta_0) + \\ &+ \Delta \rho \cos \theta_1 + \rho (\cos \alpha + \cos \theta_1 - 1) \end{aligned}$$

Note that θ_1 must be found before X_1 can be evaluated.

These equations are sufficient for ray tracing but can be simplified for matrix calculations. If one assumes small angles and a small momentum difference:

$$\theta_0 \ll 1$$

$$x_0 \ll \rho$$

$$\Delta\rho \ll \rho$$

$$\theta_1 \ll 1$$

Then one obtains the standard transport matrix equation for a wedge magnet.

$$x_1 = (\cos \alpha) x_0 + (\rho \sin \alpha) \theta_0 + (1 - \cos \alpha) \Delta\rho$$

$$\theta_1 = \frac{-\sin \alpha}{\rho} x_0 + (\cos \alpha) \theta_0 + \frac{\sin \alpha}{\rho} \Delta\rho$$

In terms of the momentum deviation, the standard matrix becomes:

$$R = \begin{bmatrix} \cos \alpha & \rho \sin \alpha & \rho (1 - \cos \alpha) \\ \frac{-\sin \alpha}{\rho} & \cos \alpha & \sin \alpha \\ 0 & 0 & 1 \end{bmatrix}$$

Wedge Magnet Matrix in the Bend Plane

The wedge magnet vertical or non-bend plane matrix is the drift space matrix.

The Transport Program Manual gives the transport matrix for other elements also. There are provisions for printing these matrices with the Transport Program. The important fact for ray tracing is that these are all available and that one can easily obtain the output vector of the element, [VX1] from the input vector [VX0]. The sometimes difficult and important problem is the obtaining of the transform from the Beam Pipe input, [VBPO] to [VX0] and

the transform from the element output, [VX1] to the output Beam Pipe [VBPI]. One may note that the rectangular magnet has a matrix in the horizontal plane of a drift space so that these transformations can be simplified. However, these transformations must be done for any element in which the matrix is not a simple drift space matrix ... i.e., vertical focusing in a dipole or gradient fields in a dipole.

Tracing A Beam Thru A Dipole

Tracing a beam thru a dipole is similar to tracing a beam thru a drift space except that the centroid is curved rather than a straight line. Different types of dipoles exist in beam lines. The common trim dipole bends the beam a few milliradians and is used for steering corrections. This can be considered a wedge dipole for beam tracing problems. A dipole that bends a beam a few degrees is usually considered a symmetrical rectangular dipole. The matrix for this dipole includes edge effects which produce vertical focussing for a horizontal dipole. It is symmetrical because the magnet is located so that the input Beam Pipe element makes the same angle with the input magnet face as the output Beam Pipe element makes with the output magnet face.

Figure 7 shows a trim dipole lying in the beam line with the current adjusted to bend a beam α milliradians.

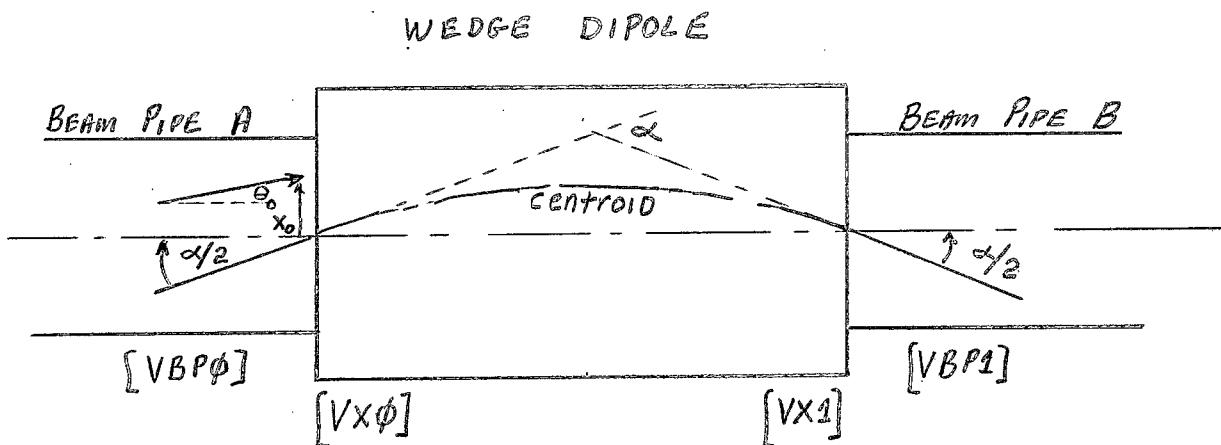


FIGURE 7

The centroid for the dipole is an arc of a circle. For convenience it can be assumed to intersect at the centroid of the Beam Pipe A and Beam Pipe B. Thus:

$$[VX_0] = \begin{bmatrix} x_0 \cos \alpha/2 \\ \theta_0 - \alpha/2 \end{bmatrix} = \begin{bmatrix} x_0 \\ \theta_0 - \alpha/2 \end{bmatrix} \quad \text{for small angles}$$

$$[VX_1] = [R] \times [VX_0] = \begin{bmatrix} x \\ 1 \\ \theta_1 \end{bmatrix}$$

Transforming out to Beam Pipe B

$$[VBP_1] = \begin{bmatrix} x_1 \cos \alpha/2 \\ \theta_1 - \alpha/2 \end{bmatrix} = \begin{bmatrix} x_1 \\ \theta_1 - \alpha/2 \end{bmatrix}$$

Note that if the dipole matrix is a drift space, then


$$\theta_1 = \theta_0 - \alpha/2$$

$$\text{and } VBP_1(\theta) = \theta_1 - \alpha/2 = \theta_0 - \alpha$$

The output Beam Pipe angle differs from the input Beam Pipe angle by the bend angle of the magnet α . This is only true if the matrix element is equal to a drift space.

For the rectangular magnet, symmetrically located, one must include the bend angle between the two Beam Pipe elements.

FIGURE 8

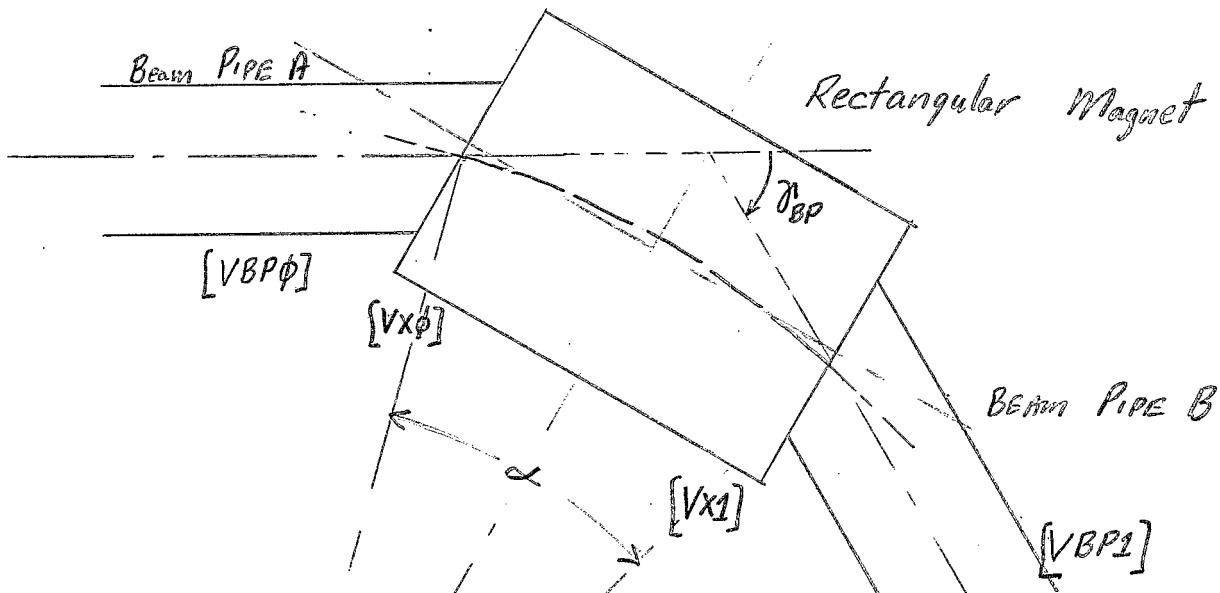

Assume that the angle between Beam Pipe A and Beam Pipe B is γ_{BP} . This angle is fixed since it is determined by the beam line layout when the beam line is designed. The bend angle for the magnet is α and varies with the current in the magnet. Given the input vector in Beam Pipe A is [VBPO]

$$[VBPO] = \begin{bmatrix} x_0 \\ \theta_0 \\ 0 \end{bmatrix}$$

Transforming this to the entrance to the magnet, one must measure this vector from the centroid in the magnet. One can see that both γ_{BP} and α must be included.

Assuming, for simplicity, only 2 components for [VBPO]; and

$$VXO(\chi) = VBPO(\chi) \left/ \cos \left(\frac{\gamma_{BP} - \alpha}{2} \right) \right.$$

$$VXO(\theta) = VBPO(\theta) - \frac{\alpha}{2} + \frac{\gamma_{BP}}{2}$$

For small angles:

$$VXO(\chi) = VBPO(\chi) = x_0$$

$$VXO(\theta) = VBPO(\theta) - \frac{\alpha}{2} + \frac{\gamma_{BP}}{2} = \theta_0 - \frac{\alpha}{2} + \frac{\gamma_{BP}}{2}$$

or in vector notation:

$$[VXO] = \begin{bmatrix} x_0 \\ \theta_0 - \alpha/2 + \frac{\gamma_{BP}}{2} \\ 0 \end{bmatrix}$$

$$[VX1] = [R] \times [VXO] = \begin{bmatrix} x_1 \\ \theta_1 \\ 0 \end{bmatrix}$$

And transforming to Beam Pipe B

$$[VBPI] = \begin{bmatrix} x_1 \cos \left(\frac{\gamma_{BP}}{2} - \frac{\alpha}{2} \right) \\ \theta_1 - \frac{\alpha}{2} + \frac{\gamma_{BP}}{2} \\ 0 \end{bmatrix} = \begin{bmatrix} x_1 \\ \theta_1 - \frac{\alpha}{2} + \frac{\gamma_{BP}}{2} \\ 0 \end{bmatrix}$$

One can see that the vector [VBPI] can not be expressed as a matrix product of different matrices and the input vector as long as sum and difference terms exist. Thus, only in the rare case that γ_{BP} and α are equal can the output vector be expressed as:

$$[VBPI] = [R] \times [VBPO]$$

This case occurs if the bending magnet current is adjusted so that the centroid bends the same amount as the beam pipe. If trim magnets are in the line and the beam pipe does not bend, then only if the current is zero can the output be expressed as a vector product of the input.

Note that no limitations are put on the [R] matrix. The only requirement is to know the location of the centroid of the [R] matrix. For this reason the [R] matrix could be a rectangular dipole or pitching magnet, a gradient dipole, or a tilted or rotated dipole.

The observer should note that this is not a new technique. If one were to trace a beam thru magnetic elements by integrating the magnetic fields, the same procedure would be necessary. The difference is that it is assumed that the element [R] matrix gives the element output location vector from the input location vector.

Conclusion

This technical note outlines a procedure for tracing a beam through any beam line. This is necessary to solve beam steering problems. The most important result is that the commonly known Transport Matrices can be used to step thru each element providing the centroid is known for each element. It is not possible to multiply or combine matrices to find the output vector in terms of the input vector due to shifts in element centroids. The results can be summarized in four corollaries.

- #1 The transport matrix equation representation of a magnetic element is not the exact description of the element. It is only a simplification.

- #2 To use the transport matrix, one must know where the centroid is for that matrix. Knowing only the transport matrix is insufficient information to solve beam ray tracing problems.
- #3 All magnetic elements, including drift spaces, in a beam transport line are separated from each other by the unity matrix Beam Pipe element.
- #4 To trace a beam from the input Beam Pipe to the output Beam Pipe, four vectors [VBPO], [VX0], [VX1], and [VBP1] must be found for each element in the beam line.

Appendix A gives an example using this procedure for the upstream part of the U line.

References:

1. K.L. Brown et al "TRANSPORT, A Computer Program for Designing Charge Particle Beam Transport Systems," SLAC-91, Rev. 2, May 1977
2. S. Penner "Calculations of Properties of Magnetic Deflection Systems," "The Review of Scientific Instruments," Vol. 32, #2, p150-160, Feb. 1961
3. J.F. Ryan "The QTUNE Program .. The AGS Extracted Beam Transport Program," AGS Tech Note #181, Aug. 4, 1982

APPENDIX A -- A Beam Line Ray Tracing Example

As an example of this procedure, a beam will be traced through the first several magnets in the U line. The beam line is shown in Figure A1.

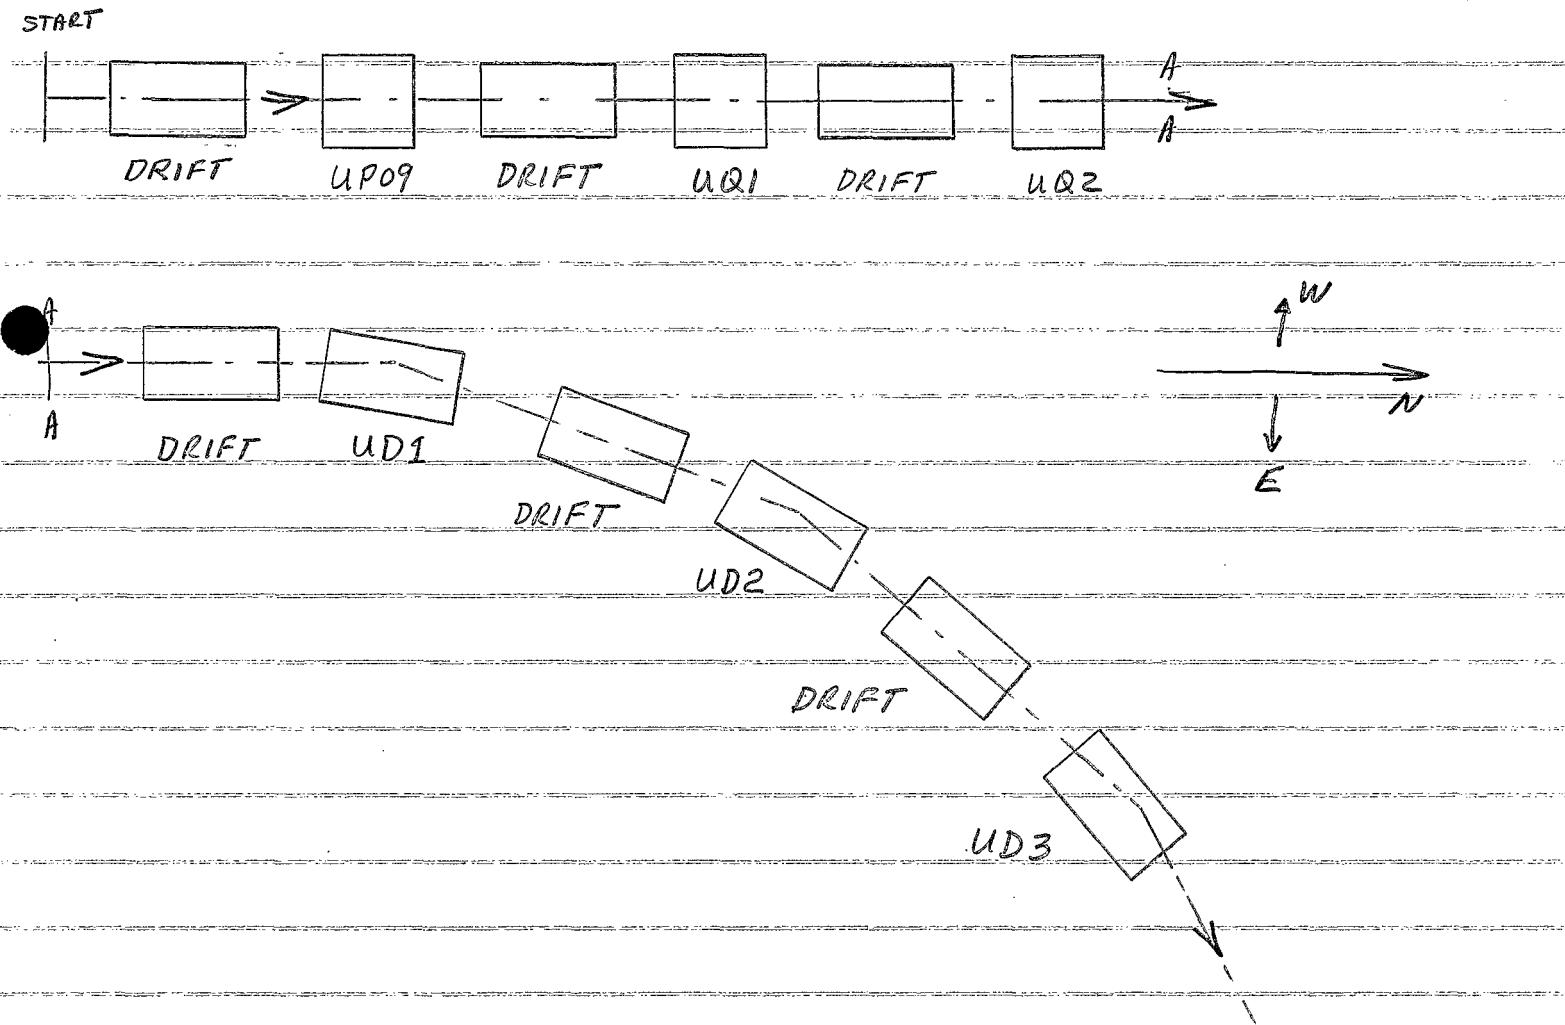


FIGURE A1 -- UPSTREAM U LINE

The characteristics of this beam line are given in Figure A2, lines 1-18.

The first element is a 95.045 inch drift followed by a wedge pitching magnet, UP09. This magnet bends the beam down by 0.03 degrees (GEL = 0.03 and positive indicates a bend down). Following UP09 is a 85.78 inch drift space. UQ1 follows which is a horizontally focussing quad with a gradient of 7.98839 KG/inch. This magnet is assumed offset in the positive horizontal direction by 0.1 inch (XSHIFT = 0.1). A 19.5 inch drift follows UQ1. This is followed by a vertically focusing quad UQ2 with a gradient of 7.69255 KG/inch. It is assumed that this magnet is offset horizontally and vertically by 0.1 inch (XSHIFT = YSHIFT = 0.1). This magnet is followed by a 18.794 inch drift. This drift is then followed by three symmetrically located rectangular dipole magnets UD1,2,3 separated by 18.1 inch drift spaces. These dipoles bend the beam 1.44220 degrees each in the horizontal direction. The beam pipe bends 1.41664 degrees in each of these magnets. It is assumed that the beam at the start can be described by an initial vector START.

START =	[0.1 inch 0.1 mr 0.1 inch 0.1 mr 0	x x y y %	positive is west positive is west positive is up positive is up
---------	---	---	-----------------------	--

The computer printout of Figures A2-A5 step-by-step traces the beam through this beam line.

line 20 The 5 components of the initial starting vector
 are printed.

line 21 The element is a drift (blank). DL should be
 neglected.

line 22 Transforming the starting vector into the beam
 pipe, one obtains [VBPO].

line 23 Since this is a drift, [VX0] = [VBPO].

line 24 The element length, DZ = 95.045 inch.

lines 25-30 The [R] matrix for this drift space.

line 32 The vector [VX1] at the output of the drift
 $[VX1] = [R] \times [VX0]$

line 33 Transforming the [VX1] vector into the beam pipe
 to obtain [VBP1].

line 36 [VBP1] repeated indicating the end of the
 element.

line 40 The beam pipe vector at the beginning of UP09 is
 the same as the beam pipe vector at the end of
 the previous element - [VBPO] = [VBP1].

line 41 Transforming [VBPO] into the pitching magnet to
 obtain [VX0]. Note that a positive iny direction
 is up and this magnet bends down. The beam pipe
 does not bend. $\alpha = .03 \text{ deg} = 0.5236 \text{ mr}$. Note
 that the mry component is changed by $\alpha/2$.

line 50 The vector [VX1] obtained from [VX0] and the [R]
 matrix for the wedge magnet.

line 51 Transforming out to the beam pipe, the mry
 component is changed by $\alpha/2$ again. (see Figure
 7 on Wedge Magnet)

line 58 The [VBP1] vector for the pitching magnet
 becomes the [VBPO] vector for the next drift
 space.

line 59 For a drift space, [VX0] = [VBPO].

lines 74-81 The output vector [VBP1] for the drift space becomes the input vector [VBP0] for UQ1.

line 82 The quad is offset by 0.1 inch in the horiz. direction so that the INX component changes transforming from the beam pipe to the magnet.

lines 84-89 The horizontal focussing quad matrix.

line 92 To obtain [VBP1] from [VX1], the INX component is changed by the offset.

lines 95-153 The vectors are stepped through drift spaces and a vertically focussing quad offset horiz. and vertically.

line 157 The input beam pipe vector to UD1, a rectangular dipole.

line 158 To obtain the mrx component of [VX0], the MRX component of [VBP0] is changed by the bend angle of the magnet and the beam pipe. The magnet bends more than the beam pipe by 0.02556 deg or 0.44611 mr. The mrx component is changed by half this angle.

lines 160-164 The [R] matrix for UD1.

line 167 The output [VX1] vector. Note that the mry component of [VX1] is less than [VX0] illustrating vertical focussing.

line 168 Transforming [VX1] out to [VBP1] the MRX component is again changed by half the angle difference.

lines 169-end The VBPI vectors are found for each component by stepping through each element.

If one wanted to plot the x and y position for this example, the inx and iny would be plotted against the downstream z.

	ELELBL	MACKIN	ELELEN	ZUS	GEL	OPERC	XBP IPE	YBP IPE	XSHIFT	YSHIFT	
00001											
00002											
00003											
00004	*	ELELBL	MACKIN	ELELEN	ZUS	GEL	OPERC	XBP IPE	YBP IPE	XSHIFT	YSHIFT
00005	1	0	95.045	0.000	0.00000	0.0	0.00000	0.0	0.000	0.000	
00006	2	UP09	-4	30.750	95.045	0.03000	0.0	0.00000	0.0	0.000	0.000
00007	3	0	85.780	125.795	0.00000	0.0	0.00000	0.0	0.000	0.000	
00008	4	UQ1	1	37.500	211.575	-7.98839	0.0	0.00000	0.0	0.100	0.000
00009	5	0	19.500	249.075	0.00000	0.0	0.00000	0.0	0.000	0.000	
00010	6	UQ2	1	37.500	268.575	7.69255	0.0	0.00000	0.0	0.100	0.100
00011	7	0	18.794	306.075	0.00000	0.0	0.00000	0.0	0.000	0.000	
00012	8	UD1	-1	81.900	324.869	1.44220	0.0	1.41664	0.0	0.000	0.000
00013	9	0	18.100	406.769	0.00000	0.0	0.00000	0.0	0.000	0.000	
00014	10	UD2	-1	81.900	424.869	1.44220	0.0	1.41664	0.0	0.000	0.000
00015	11	0	18.100	506.769	0.00000	0.0	0.00000	0.0	0.000	0.000	
00016	12	UD3	-1	81.900	524.869	1.44220	0.0	1.41664	0.0	0.000	0.000
00017	13	0	10.450	606.769	0.00000	0.0	0.00000	0.0	0.000	0.000	
00018											
00019											
00020		0.100000	INX	0.100000	MRX	0.100000	INY	0.100000	MRY	0.000 %	START
00021		ELEMENT=			UPSTREAM	Z=	0.000	DL=	0.000		
00022		0.100000	INX	0.100000	MRX	0.100000	INY	0.100000	MRY	0.000 %	VBP0
00023		0.100000	INX	0.100000	MRX	0.100000	INY	0.100000	MRY	0.000 %	VX0
00024		Z0=	0.000	DZ=	95.045	XZ=	95.045				
00025					1.00000	0.09505	0.00000	0.00000	0.00000		
00026					0.00000	1.00000	0.00000	0.00000	0.00000		
00027		====			0.00000	0.00000	1.00000	0.09505	0.00000		
00028					0.00000	0.00000	0.00000	1.00000	0.00000		
00029					0.00000	0.00000	0.00000	0.00000	1.00000		
00030					0.000	INCHES					
00031		ELEMENT=			DOWNSTREAM	Z=	95.045				
00032		0.109504	INX	0.100000	MRX	0.109504	INY	0.100000	MRY	0.000 %	VX1
00033		0.109504	INX	0.100000	MRX	0.109504	INY	0.100000	MRY	0.000 %	VBP1
00034											
00035											
00036		0.109504	INX	0.100000	MRX	0.109504	INY	0.100000	MRY	0.000 %	VBP1
00037											
00038											
00039		ELEMENT=	UP09		UPSTREAM	Z=	95.045	DL=	0.000		
00040		0.109504	INX	0.100000	MRX	0.109504	INY	0.100000	MRY	0.000 %	VBP0
00041		0.109504	INX	0.100000	MRX	0.109504	INY	-0.161799	MRY	0.000 %	VX0
00042		Z0=	95.045	DZ=	30.750	XZ=	125.795				
00043					1.00000	0.03075	0.00000	0.00000	0.00000		
00044					0.00000	1.00000	0.00000	0.00000	0.00000		
00045		UP09	====		0.00000	0.00000	1.00000	0.03075	0.000008		
00046					0.00000	0.00000	-0.100001	1.00000	0.000524		
00047					0.00000	0.00000	0.00000	0.00000	1.000000		
00048					95.045	INCHES					
00049		ELEMENT=	UP09		DOWNSTREAM	Z=	125.795				
00050		0.112579	INX	0.100000	MRX	0.104529	INY	-0.161800	MRY	0.000 %	VX1
00051		0.112579	INX	0.100000	MRX	0.104529	INY	-0.423600	MRY	0.000 %	VBP1
00052											
00053											
00054		0.112579	INX	0.100000	MRX	0.104529	INY	-0.423600	MRY	0.000 %	VBP1
00055											
00056											
00057		ELEMENT=			UPSTREAM	Z=	125.795	DL=	0.000		
00058		0.112579	INX	0.100000	MRX	0.104529	INY	-0.423600	MRY	0.000 %	VBP0
00059		0.112579	INX	0.100000	MRX	0.104529	INY	-0.423600	MRY	0.000 %	VX0
00060		Z0=	125.795	DZ=	85.780	XZ=	211.575				
00061											
00062											
00063											
00064											

00065
 00066
 00067
 00068
 00069
 00070
 00071 125.795 INCHES
 00072 ELEMENT= DOWNSTREAM Z= 211.575
 00073 0.121157 INX 0.100000 MRX 0.068193 INY -0.423600 MRY 0.000 % VX1
 00074 0.121157 INX 0.100000 MRX 0.068193 INY -0.423600 MRY 0.000 % VBP1
 00075
 00076
 00077 0.121157 INX 0.100000 MRX 0.068193 INY -0.423600 MRY 0.000 % VBP1
 00078
 00079
 00080 ELEMENT= UQ1 UPSTREAM Z= 211.575 DL= 0.000
 00081 0.121157 INX 0.100000 MRX 0.068193 INY -0.423600 MRY 0.000 % VBP0
 00082 0.021157 INX 0.100000 MRX 0.068193 INY -0.423600 MRY 0.000 % VX0
 00083 Z0= 211.575 DZ= 37.500 XZ= 249.075
 00084 0.85801 0.03571 0.00000 0.00000 0.00000
 00085 -7.38805 0.85801 0.00000 0.00000 0.00000
 00086 UQ1 === 0.00000 0.00000 1.14904 0.03935 0.00000
 00087 0.00000 0.00000 8.14063 1.14904 0.00000
 00088 0.00000 0.00000 0.00000 0.00000 1.00000
 00089 211.575 INCHES
 00090 ELEMENT= UQ1 DOWNSTREAM Z= 249.075
 00091 0.021724 INX -0.070511 MRX 0.061690 INY 0.068399 MRY 0.000 % VX1
 00092 0.121724 INX -0.070511 MRX 0.061690 INY 0.068399 MRY 0.000 % VBP1
 00093
 00094
 00095 0.121724 INX -0.070511 MRX 0.061690 INY 0.068399 MRY 0.000 % VBP1
 00096
 00097
 00098 ELEMENT= UPSTREAM Z= 249.075 DL= 0.000
 00099 0.121724 INX -0.070511 MRX 0.061690 INY 0.068399 MRY 0.000 % VBP0
 00100 0.121724 INX -0.070511 MRX 0.061690 INY 0.068399 MRY 0.000 % VX0
 00101 Z0= 249.075 DZ= 19.500 XZ= 268.575
 00102 1.00000 0.01950 0.00000 0.00000 0.00000
 00103 0.00000 1.00000 0.00000 0.00000 0.00000
 00104 === 0.00000 0.00000 1.00000 0.01950 0.00000
 00105 0.00000 0.00000 0.00000 1.00000 0.00000
 00106 0.00000 0.00000 0.00000 0.00000 1.00000
 00107 249.075 INCHES
 00108 ELEMENT= DOWNSTREAM Z= 268.575
 00109 0.120349 INX -0.070511 MRX 0.063023 INY 0.068399 MRY 0.000 % VX1
 00110 0.120349 INX -0.070511 MRX 0.063023 INY 0.068399 MRY 0.000 % VBP1
 00111
 00112
 00113 0.120349 INX -0.070511 MRX 0.063023 INY 0.068399 MRY 0.000 % VBP1
 00114
 00115
 00116 ELEMENT= UQ2 UPSTREAM Z= 268.575 DL= 0.000
 00117 0.120349 INX -0.070511 MRX 0.063023 INY 0.068399 MRY 0.000 % VBP0
 00118 0.020349 INX -0.070511 MRX -0.036977 INY 0.068399 MRY 0.000 % VX0
 00119 Z0= 268.575 DZ= 37.500 XZ= 306.075
 00120 1.14339 0.03928 0.00000 0.00000 0.00000
 00121 7.82585 1.14339 0.00000 0.00000 0.00000
 00122 UQ2 === 0.00000 0.00000 0.86315 0.03577 0.00000
 00123 0.00000 0.00000 -7.12749 0.86315 0.00000
 00124 0.00000 0.00000 0.00000 0.00000 1.00000
 00125
 00126
 00127
 00128 268.575 INCHES

00129
 00130 ELEMENT= U02 DOWNSTREAM Z= 306.075
 00131 0.020498 INX 0.078618 MRX -0.029469 INY 0.322588 MRY 0.000 % VX1
 00132 0.120498 INX 0.078618 MRX 0.070531 INY 0.322588 MRY 0.000 % VBP1
 00133
 00134
 00135 0.120498 INX 0.078618 MRX 0.070531 INY 0.322588 MRY 0.000 % VBP1
 00136
 00137
 00138 ELEMENT= UPSTREAM Z= 306.075 DL= 0.000
 00139 0.120498 INX 0.078618 MRX 0.070531 INY 0.322588 MRY 0.000 % VBP0
 00140 0.120498 INX 0.078618 MRX 0.070531 INY 0.322588 MRY 0.000 % VX0
 00141 Z0= 306.075 DZ= 18.794 XZ= 324.869
 00142 1.00000 0.01879 0.00000 0.00000 0.00000
 00143 0.00000 1.00000 0.00000 0.00000 0.00000
 00144 === 0.00000 0.00000 1.00000 0.01879 0.00000
 00145 0.00000 0.00000 0.00000 1.00000 0.00000
 00146 0.00000 0.00000 0.00000 0.00000 1.00000
 00147 306.075 INCHES
 00148 ELEMENT= DOWNSTREAM Z= 324.869
 00149 0.121975 INX 0.078618 MRX 0.076593 INY 0.322588 MRY 0.000 % VX1
 00150 0.121975 INX 0.078618 MRX 0.076593 INY 0.322588 MRY 0.000 % VBP1
 00151
 00152
 00153 0.121975 INX 0.078618 MRX 0.076593 INY 0.322588 MRY 0.000 % VBP1
 00154
 00155
 00156 ELEMENT= UD1 UPSTREAM Z= 324.869 DL= 0.000
 00157 0.121975 INX 0.078618 MRX 0.076593 INY 0.322588 MRY 0.000 % VBP0
 00158 0.121975 INX -0.144435 MRX 0.076593 INY 0.322588 MRY 0.000 % VX0
 00159 Z0= 324.869 DZ= 81.900 XZ= 406.769
 00160 1.00000 0.08189 0.00000 0.00000 0.01031
 00161 -0.00000 1.00000 0.00000 0.00000 0.25172
 00162 UD1 === 0.00000 0.00000 0.99968 0.08190 0.00000
 00163 0.00000 0.00000 -0.00774 0.99968 0.00000
 00164 0.00000 0.00000 0.00000 0.00000 1.00000
 00165 324.869 INCHES
 00166 ELEMENT= UD1 DOWNSTREAM Z= 406.769
 00167 0.110147 INX -0.144435 MRX 0.102989 INY 0.321894 MRY 0.000 % VX1
 00168 0.110147 INX -0.367488 MRX 0.102989 INY 0.321894 MRY 0.000 % VBP1
 00169
 00170
 00171 0.110147 INX -0.367488 MRX 0.102989 INY 0.321894 MRY 0.000 % VBP1
 00172
 00173
 00174 ELEMENT= UPSTREAM Z= 406.769 DL= 0.000
 00175 0.110147 INX -0.367488 MRX 0.102989 INY 0.321894 MRY 0.000 % VBP0
 00176 0.110147 INX -0.367488 MRX 0.102989 INY 0.321894 MRY 0.000 % VX0
 00177 Z0= 406.769 DZ= 18.100 XZ= 424.869
 00178 1.00000 0.01810 0.00000 0.00000 0.00000
 00179 0.00000 1.00000 0.00000 0.00000 0.00000
 00180 === 0.00000 0.00000 1.00000 0.01810 0.00000
 00181 0.00000 0.00000 0.00000 1.00000 0.00000
 00182 0.00000 0.00000 0.00000 0.00000 1.00000
 00183 406.769 INCHES
 00184 ELEMENT= DOWNSTREAM Z= 424.869
 00185 0.103496 INX -0.367488 MRX 0.108815 INY 0.321894 MRY 0.000 % VX1
 00186 0.103496 INX -0.367488 MRX 0.108815 INY 0.321894 MRY 0.000 % VBP1
 00187
 00188
 00189 0.103496 INX -0.367488 MRX 0.108815 INY 0.321894 MRY 0.000 % VBP1
 00190
 00191
 00192

00193
 00194
 00195
 00196 ELEMENT= UD2 UPSTREAM Z= 424.869 DL= 0.000
 00197 0.103496 INX -0.4367488 MRX 0.108815 INY 0.321894 MRY 0.000 % VBP0
 00198 0.103496 INX -0.590542 MRX 0.108815 INY 0.321894 MRY 0.000 % VX0
 00199 Z0= 424.869 DZ= 81.900 XZ= 506.769
 00200 1.00000 0.08189 0.00000 0.00000 0.01031
 00201 -0.00000 1.00000 0.00000 0.00000 0.25172
 00202 UD2 === 0.00000 0.00000 0.99968 0.08190 0.00000
 00203 0.00000 0.00000 -0.00774 0.99968 0.00000
 00204 0.00000 0.00000 0.00000 0.00000 1.00000
 00205 424.869 INCHES
 00206 ELEMENT= UD2 DOWNSTREAM Z= 506.769
 00207 0.055136 INX -0.590542 MRX 0.135144 INY 0.320950 MRY 0.000 % VX1
 00208 0.055136 INX -0.813595 MRX 0.135144 INY 0.320950 MRY 0.000 % VBP1
 00209
 00210
 00211 0.055136 INX -0.813595 MRX 0.135144 INY 0.320950 MRY 0.000 % VBP1
 00212
 00213
 00214 ELEMENT= UPSTREAM Z= 506.769 DL= 0.000
 00215 0.055136 INX -0.813595 MRX 0.135144 INY 0.320950 MRY 0.000 % VBP0
 00216 0.055136 INX -0.813595 MRX 0.135144 INY 0.320950 MRY 0.000 % VX0
 00217 Z0= 506.769 DZ= 18.100 XZ= 524.869
 00218 1.00000 0.01810 0.00000 0.00000 0.00000
 00219 -0.00000 1.00000 0.00000 0.00000 0.00000
 00220 === 0.00000 0.00000 1.00000 0.01810 0.00000
 00221 0.00000 0.00000 0.00000 1.00000 0.00000
 00222 0.00000 0.00000 0.00000 0.00000 0.1.00000
 00223 506.769 INCHES
 00224 ELEMENT= DOWNSTREAM Z= 524.869
 00225 0.040409 INX -0.813595 MRX 0.140953 INY 0.320950 MRY 0.000 % VX1
 00226 0.040409 INX -0.813595 MRX 0.140953 INY 0.320950 MRY 0.000 % VBP1
 00227
 00228
 00229 0.040409 INX -0.813595 MRX 0.140953 INY 0.320950 MRY 0.000 % VBP1
 00230
 00231
 00232 ELEMENT= UD3 UPSTREAM Z= 524.869 DL= 0.000
 00233 0.040409 INX -0.813595 MRX 0.140953 INY 0.320950 MRY 0.000 % VBP0
 00234 0.040409 INX -1.036648 MRX 0.140953 INY 0.320950 MRY 0.000 % VX0
 00235 Z0= 524.869 DZ= 81.900 XZ= 606.769
 00236 1.00000 0.08189 0.00000 0.00000 0.01031
 00237 0.00000 1.00000 0.00000 0.00000 0.25172
 00238 UD3 === 0.00000 0.00000 0.99968 0.08190 0.00000
 00239 0.00000 0.00000 -0.00774 0.99968 0.00000
 00240 0.00000 0.00000 0.00000 0.00000 0.1.00000
 00241 524.869 INCHES
 00242 ELEMENT= UD3 DOWNSTREAM Z= 606.769
 00243 -0.044483 INX -1.036648 MRX 0.167194 INY 0.31975B MRY 0.000 % VX1
 00244 -0.044483 INX -1.259701 MRX 0.167194 INY 0.31975B MRY 0.000 % VBP1
 00245
 00246
 00247 -0.044483 INX -1.259701 MRX 0.167194 INY 0.31975B MRY 0.000 % VBP1
 00248
 00249
 00250
 00251
 00252
 00253
 00254
 00255
 00256

FIGURE A5

	ELELBL	MAGKIN	ELELEN	ZUS	GEL	QPERC	XPIPE	YPIPE	XSHIFT	YSHIFT	
00004	*										
00005	1	0	95.045	0.000	0.00000	0.0	0.00000	0.0	0.000	0.000	
00006	2	UP09	-4	30.750	95.045	0.03000	0.0	0.00000	0.0	0.000	0.000
00007	3	0	85.780	125.795	0.00000	0.0	0.00000	0.0	0.000	0.000	
00008	4	UQ1	1	37.500	211.575	-7.98839	0.0	0.00000	0.0	0.100	0.000
00009	5	0	19.500	249.075	0.00000	0.0	0.00000	0.0	0.000	0.000	
00010	6	UQ2	1	37.500	268.575	7.69255	0.0	0.00000	0.0	0.100	0.100
00011	7	0	18.794	306.075	0.00000	0.0	0.00000	0.0	0.000	0.000	
00012	8	UD1	-1	81.900	324.869	1.44220	0.0	1.41664	0.0	0.000	0.000
00013	9	0	18.100	406.769	0.00000	0.0	0.00000	0.0	0.000	0.000	
00014	10	UD2	-1	81.900	424.869	1.44220	0.0	1.41664	0.0	0.000	0.000
00015	11	0	18.100	506.769	0.00000	0.0	0.00000	0.0	0.000	0.000	
00016	12	UD3	-1	81.900	524.869	1.44220	0.0	1.41664	0.0	0.000	0.000
00017	13	0	10.450	606.769	0.00000	0.0	0.00000	0.0	0.000	0.000	
00018											
00019											
00020		0.100000	INX	0.100000	MRX	0.100000	INY	0.100000	MYR	0.000	%
00021		ELEMENT=		UPSTREAM	Z=	0.000	DL=	0.000			START
00022		0.100000	INX	0.100000	MRX	0.100000	INY	0.100000	MYR	0.000	%
00023		0.100000	INX	0.100000	MRX	0.100000	INY	0.100000	MYR	0.000	%
00024		Z0=	0.000	DZ=	95.045	XZ=	95.045				
00025			1.00000		0.09505		0.00000	0.00000			
00026			0.00000		1.00000		0.00000	0.00000			
00027		====	0.00000		0.00000		1.00000	0.09505			
00028			0.00000		0.00000		0.00000	1.00000			
00029			0.00000		0.00000		0.00000	0.00000			
00030			0.000	INCHES							
00031		ELEMENT=		DOWNSTREAM	Z=	95.045					
00032		0.109504	INX	0.100000	MRX	0.109504	INY	0.100000	MYR	0.000	%
00033		0.109504	INX	0.100000	MRX	0.109504	INY	0.100000	MYR	0.000	%
00034											
00035											
00036		0.109504	INX	0.100000	MRX	0.109504	INY	0.100000	MYR	0.000	%
00037											
00038											
00039		ELEMENT= UP09		UPSTREAM	Z=	95.045	DL=	0.000			
00040		0.109504	INX	0.100000	MRX	0.109504	INY	0.100000	MYR	0.000	%
00041		0.109504	INX	0.100000	MRX	0.109504	INY	-0.161799	MYR	0.000	%
00042		Z0=	95.045	DZ=	30.750	XZ=	125.795				
00043			1.00000		0.03075		0.00000	0.00000			
00044			0.00000		1.00000		0.00000	0.00000			
00045		UP09	====		0.00000		0.00000	1.00000	0.03075		
00046			0.00000		0.00000		-0.100001	1.00000	0.000524		
00047			0.00000		0.00000		0.00000	0.00000	0.00000		
00048			95.045	INCHES							
00049		ELEMENT= UP09		DOWNSTREAM	Z=	125.795					
00050		0.112579	INX	0.100000	MRX	0.104529	INY	-0.161800	MYR	0.000	%
00051		0.112579	INX	0.100000	MRX	0.104529	INY	-0.423600	MYR	0.000	%
00052											
00053											
00054		0.112579	INX	0.100000	MRX	0.104529	INY	-0.423600	MYR	0.000	%
00055											
00056											
00057		ELEMENT= UPSTREAM		Z=	125.795	DL=	0.000				
00058		0.112579	INX	0.100000	MRX	0.104529	INY	-0.423600	MYR	0.000	%
00059		0.112579	INX	0.100000	MRX	0.104529	INY	-0.423600	MYR	0.000	%
00060		Z0=	125.795	DZ=	85.780	XZ=	211.575				
00061											
00062											
00063											
00064											

FIGURE A2

00065
 00066 1.00000 0.08578 0.00000 0.00000 0.00000
 00067 0.00000 1.00000 0.00000 0.00000 0.00000
 00068 === 0.00000 0.00000 1.00000 0.08578 0.00000
 00069 0.00000 0.00000 0.00000 1.00000 0.00000
 00070 0.00000 0.00000 0.00000 0.00000 0.1.00000
 00071 125.795 INCHES
 00072 ELEMENT= DOWNSTREAM Z= 211.575
 00073 0.121157 INX 0.100000 MRX 0.068193 INY -0.423600 MRY 0.000 % VX1
 00074 0.121157 INX 0.100000 MRX 0.068193 INY -0.423600 MRY 0.000 % VBP1
 00075
 00076
 00077 0.121157 INX 0.100000 MRX 0.068193 INY -0.423600 MRY 0.000 % VBP1
 00078
 00079
 00080 ELEMENT= UQ1 UPSTREAM Z= 211.575 DL= 0.000
 00081 0.121157 INX 0.100000 MRX 0.068193 INY -0.423600 MRY 0.000 % VBP0
 00082 0.021157 INX 0.100000 MRX 0.068193 INY -0.423600 MRY 0.000 % VX6
 00083 ZO= 211.575 DZ= 37.500 XZ= 249.075
 00084 0.85801 0.03571 0.00000 0.00000 0.00000
 00085 -7.38805 0.85801 0.00000 0.00000 0.00000
 00086 UQ1 === 0.00000 0.00000 1.14904 0.03935 0.00000
 00087 0.00000 0.00000 8.14063 1.14904 0.00000
 00088 0.00000 0.00000 0.00000 0.00000 1.00000
 00089 211.575 INCHES
 00090 ELEMENT= UQ1 DOWNSTREAM Z= 249.075
 00091 0.021724 INX -0.070511 MRX 0.061690 INY 0.068399 MRY 0.000 % VX1
 00092 0.121724 INX -0.070511 MRX 0.061690 INY 0.068399 MRY 0.000 % VBP1
 00093
 00094
 00095 0.121724 INX -0.070511 MRX 0.061690 INY 0.068399 MRY 0.000 % VBP1
 00096
 00097
 00098 ELEMENT= UPSTREAM Z= 249.075 DL= 0.000
 00099 0.121724 INX -0.070511 MRX 0.061690 INY 0.068399 MRY 0.000 % VBP0
 00100 0.121724 INX -0.070511 MRX 0.061690 INY 0.068399 MRY 0.000 % VX0
 00101 ZO= 249.075 DZ= 19.500 XZ= 268.575
 00102 1.00000 0.01950 0.00000 0.00000 0.00000
 00103 0.00000 1.00000 0.00000 0.00000 0.00000
 00104 === 0.00000 0.00000 1.00000 0.01950 0.00000
 00105 0.00000 0.00000 0.00000 1.00000 0.00000
 00106 0.00000 0.00000 0.00000 0.00000 1.00000
 00107 249.075 INCHES
 00108 ELEMENT= DOWNSTREAM Z= 268.575
 00109 0.120349 INX -0.070511 MRX 0.063023 INY 0.068399 MRY 0.000 % VX1
 00110 0.120349 INX -0.070511 MRX 0.063023 INY 0.068399 MRY 0.000 % VBP1
 00111
 00112
 00113 0.120349 INX -0.070511 MRX 0.063023 INY 0.068399 MRY 0.000 % VBP1
 00114
 00115
 00116 ELEMENT= UQ2 UPSTREAM Z= 268.575 DL= 0.000
 00117 0.120349 INX -0.070511 MRX 0.063023 INY 0.068399 MRY 0.000 % VBP0
 00118 0.020349 INX -0.070511 MRX -0.036977 INY 0.068399 MRY 0.000 % VX0
 00119 ZO= 268.575 DZ= 37.500 XZ= 306.075
 00120 1.14339 0.03928 0.00000 0.00000 0.00000
 00121 7.82535 1.14339 0.00000 0.00000 0.00000
 00122 UQ2 === 0.00000 0.00000 0.86315 0.03577 0.00000
 00123 0.00000 0.00000 -7.12749 0.86315 0.00000
 00124 0.00000 0.00000 0.00000 0.00000 1.00000
 00125 268.575 INCHES

FIGURE A3

00129
 00130 ELEMENT= UQ2 DOWNSTREAM Z= 306.075
 00131 0.120498 INX 0.078618 MRX 0.029469 INY 0.322588 MRY 0.000 % VX1
 00132 0.120498 INX 0.078618 MRX 0.070531 INY 0.322588 MRY 0.000 % VBP1
 00133
 00134
 00135 0.120498 INX 0.078618 MRX 0.070531 INY 0.322588 MRY 0.000 % VBP1
 00136
 00137
 00138 ELEMENT= UPSTREAM Z= 306.075 DL= 0.000
 00139 0.120498 INX 0.078618 MRX 0.070531 INY 0.322588 MRY 0.000 % VBP0
 00140 0.120498 INX 0.078618 MRX 0.070531 INY 0.322588 MRY 0.000 % VX0
 00141 Z0= 306.075 DZ= 18.794 XZ= 324.869
 00142 1.00000 0.01879 0.00000 0.00000 0.00000
 00143 0.00000 1.00000 0.00000 0.00000 0.00000
 00144 == 0.00000 0.00000 1.00000 0.01879 0.00000
 00145 0.00000 0.00000 0.00000 1.00000 0.00000
 00146 0.00000 0.00000 0.00000 0.00000 1.00000
 00147 306.075 INCHES
 00148 ELEMENT= DOWNSTREAM Z= 324.869
 00149 0.121975 INX 0.078618 MRX 0.076593 INY 0.322588 MRY 0.000 % VX1
 00150 0.121975 INX 0.078618 MRX 0.076593 INY 0.322588 MRY 0.000 % VBP1
 00151
 00152
 00153 0.121975 INX 0.078618 MRX 0.076593 INY 0.322588 MRY 0.000 % VBP1
 00154
 00155
 00156 ELEMENT= UD1 UPSTREAM Z= 324.869 DL= 0.000
 00157 0.121975 INX 0.078618 MRX 0.076593 INY 0.322588 MRY 0.000 % VBP0
 00158 0.121975 INX -0.144435 MRX 0.076593 INY 0.322588 MRY 0.000 % VX0
 00159 Z0= 324.869 DZ= 18.100 XZ= 406.769
 00160 1.00000 0.08189 0.00000 0.00000 0.01031
 00161 -0.00000 1.00000 0.00000 0.00000 0.25172
 00162 UD1 == 0.00000 0.00000 0.99968 0.08190 0.00000
 00163 0.00000 0.00000 -0.00774 0.99968 0.00000
 00164 0.00000 0.00000 0.00000 0.00000 1.00000
 00165 324.869 INCHES
 00166 ELEMENT= UD1 DOWNSTREAM Z= 406.769
 00167 0.110147 INX -0.144435 MRX 0.102989 INY 0.321894 MRY 0.000 % VX1
 00168 0.110147 INX -0.367488 MRX 0.102989 INY 0.321894 MRY 0.000 % VBP1
 00169
 00170
 00171 0.110147 INX -0.367488 MRX 0.102989 INY 0.321894 MRY 0.000 % VBP1
 00172
 00173
 00174 ELEMENT= UPSTREAM Z= 406.769 DL= 0.000
 00175 0.110147 INX -0.367488 MRX 0.102989 INY 0.321894 MRY 0.000 % VBP0
 00176 0.110147 INX -0.367488 MRX 0.102989 INY 0.321894 MRY 0.000 % VX0
 00177 Z0= 406.769 DZ= 18.100 XZ= 424.869
 00178 1.00000 0.01810 0.00000 0.00000 0.00000
 00179 0.00000 1.00000 0.00000 0.00000 0.00000
 00180 == 0.00000 0.00000 1.00000 0.01810 0.00000
 00181 0.00000 0.00000 0.00000 1.00000 0.00000
 00182 0.00000 0.00000 0.00000 0.00000 1.00000
 00183 406.769 INCHES
 00184 ELEMENT= DOWNSTREAM Z= 424.869
 00185 0.103496 INX -0.367488 MRX 0.108815 INY 0.321894 MRY 0.000 % VX1
 00186 0.103496 INX -0.367488 MRX 0.108815 INY 0.321894 MRY 0.000 % VBP1
 00187
 00188 0.103496 INX -0.367488 MRX 0.108815 INY 0.321894 MRY 0.000 % VBP1
 00189
 00190
 00191
 00192

00193
 00194
 00195
 00196 ELEMENT= UD2 UPSTREAM Z= 424.869 DL= 0.000
 00197 0.103496 INX -0.367488 MRX 0.108815 INY 0.321894 MRY 0.000 Z VBP0
 00198 0.103496 INX -0.590542 MRX 0.108815 INY 0.321894 MRY 0.000 Z VX0
 00199 ZD= 424.869 DZ= 81.900 XZ= 506.769
 00200 1.00000 0.08189 0.00000 0.00000 0.01031
 00201 -0.00000 1.00000 0.00000 0.00000 10.25172
 00202 UD2 === 0.00000 0.00000 0.99968 0.08190 0.00000
 00203 0.00000 0.00000 -0.00774 0.99968 0.00000
 00204 0.00000 0.00000 0.00000 0.00000 1.00000
 00205 424.869 INCHES
 00206 ELEMENT= UD2 DOWNSTREAM Z= 506.769
 00207 0.055136 INX -0.590542 MRX 0.135144 INY 0.320950 MRY 0.000 Z VX1
 00208 0.055136 INX -0.813595 MRX 0.135144 INY 0.320950 MRY 0.000 Z VBP1
 00209
 00210
 00211 0.055136 INX -0.813595 MRX 0.135144 INY 0.320950 MRY 0.000 Z VBP1
 00212
 00213
 00214 ELEMENT= UPSTREAM Z= 506.769 DL= 0.000
 00215 0.055136 INX -0.813595 MRX 0.135144 INY 0.320950 MRY 0.000 Z VBP0
 00216 0.055136 INX -0.813595 MRX 0.135144 INY 0.320950 MRY 0.000 Z VX0
 00217 ZD= 506.769 DZ= 81.100 XZ= 524.869
 00218 1.00000 0.081810 0.00000 0.00000 0.01031
 00219 0.00000 1.00000 0.00000 0.00000 0.00000
 00220 === 0.00000 0.00000 1.00000 0.081810 0.00000
 00221 0.00000 0.00000 0.00000 1.00000 0.00000
 00222 0.00000 0.00000 0.00000 0.00000 1.00000
 00223 506.769 INCHES
 00224 ELEMENT= DOWNSTREAM Z= 524.869
 00225 0.040409 INX -0.813595 MRX 0.140953 INY 0.320950 MRY 0.000 Z VX1
 00226 0.040409 INX -0.813595 MRX 0.140953 INY 0.320950 MRY 0.000 Z VBP1
 00227
 00228
 00229 0.040409 INX -0.813595 MRX 0.140953 INY 0.320950 MRY 0.000 Z VBP1
 00230
 00231
 00232 ELEMENT= UD3 UPSTREAM Z= 524.869 DL= 0.000
 00233 0.040409 INX -0.813595 MRX 0.140953 INY 0.320950 MRY 0.000 Z VBP0
 00234 0.040409 INX -1.036648 MRX 0.140953 INY 0.320950 MRY 0.000 Z VX0
 00235 ZD= 524.869 DZ= 81.900 XZ= 606.769
 00236 1.00000 0.08189 0.00000 0.00000 0.01031
 00237 0.00000 1.00000 0.00000 0.00000 10.25172
 00238 UD3 === 0.00000 0.00000 0.99968 0.08190 0.00000
 00239 0.00000 0.00000 -0.00774 0.99968 0.00000
 00240 0.00000 0.00000 0.00000 0.00000 1.00000
 00241 524.869 INCHES
 00242 ELEMENT= UD3 DOWNSTREAM Z= 606.769
 00243 -0.044483 INX -1.036648 MRX 0.167194 INY 0.319758 MRY 0.000 Z VX1
 00244 -0.044483 INX -1.259701 MRX 0.167194 INY 0.319758 MRY 0.000 Z VBP1
 00245
 00246
 00247 -0.044483 INX -1.259701 MRX 0.167194 INY 0.319758 MRY 0.000 Z VBP1
 00248
 00249
 00250
 00251
 00252
 00253
 00254
 00255
 00256

FIGURE A5

APPENDIX A --- A Beam Line Ray Tracing Example

As an example of this procedure, a beam will be traced through the first several magnets in the U line. The beam line is shown in Figure A1.

START

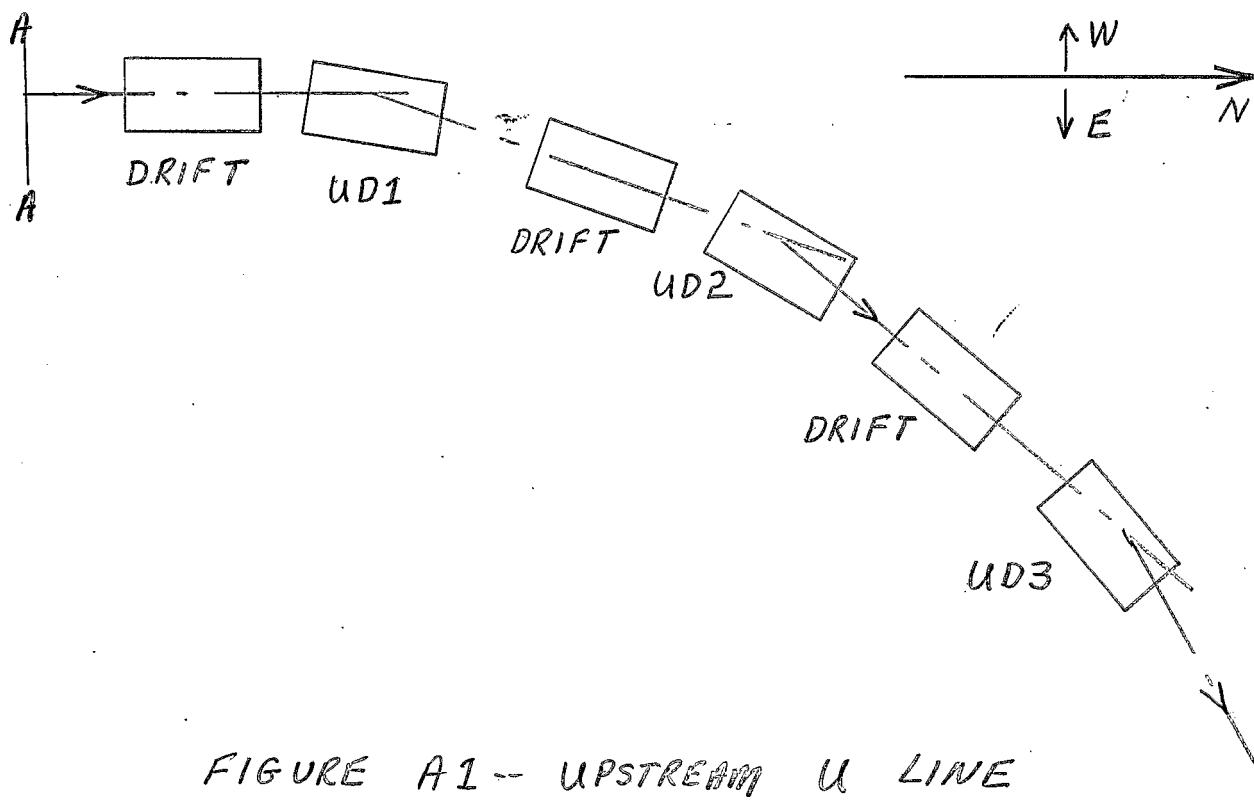
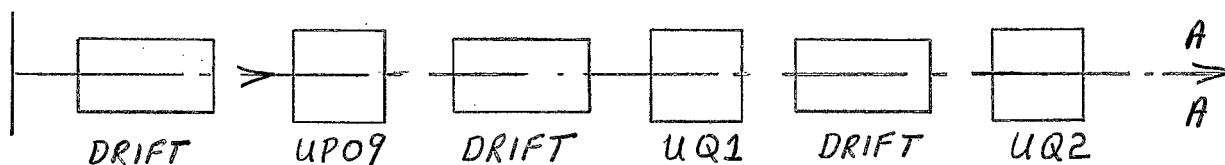


FIGURE A1 -- UPSTREAM U LINE