



BNL-104138-2014-TECH

AGS.SN262;BNL-104138-2014-IR

Growth Rate of Longitudinal Instability on 1.77 GeV (2.71 GeV Total) Flatop

E. Raka

May 1990

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

5/29/90

Number 262

AGS Studies Report

Date(s): May 4, 1990

Time(s): 2000 - 0100

Experimenter(s): E. Raka, M. Brennan, L. Ahrens, and
E. Gill

Reported by: E. Raka

Subject: Growth Rate of Longitudinal Instability on
1.77 GeV (2.71 GeV Total) Flat Top

Observations & Results

The purpose of this study was to measure the growth rate of the longitudinal coupled bunch instability that occurs at $f_{rf} = 4.182$ MHz as a function of the bunch length. Previous studies (#244 and #251) had given a growth rate of 24 sec^{-1} at 8×10^{12} with a bunch length of $70 \mu\text{sec}$. By using the chopper, it was possible to obtain bunches of $\approx 46 \mu\text{sec}$ duration on a 1.77 GeV flat top where $f_{rf} = 4.182$ with intensities of at least 1.6×10^{12} . Some difficulties with transverse instabilities were encountered during the set up but these were overcome by changing the tune.

In addition to measuring the growth rate, an attempt was made to measure the spectrum of the oscillating part of the charge distribution. Two spectrum analyzers were employed; one tuned to the 11th harmonic of the rotation frequency (348 kc) to monitor the amplitude of the instability growth and the other tuned to any other line in the spectrum [$f_0 (n + k \cdot 12) + mf_s$]. Initially, the bandwidth of the analyzers was set to 10 kc which meant that any signal at $(n + 12k)f_0$ due to unequal bunch populations would be seen along with the signal separated by $\pm f_s \approx 1.65$ kc due to the instability. At first, there was appreciable unequal bunch signal so it was decided to reduce the bandwidth to 1 kc (in the fixed tune mode) so as to separate the two signals. Since previous measurements (not with a spectrum analyzer) had identified the mode as $n = 1$, one of the analyzers was tuned to $(11 f_0 - f_s)$ with no result. However, when it was tuned to $11 f_0 + f_s$, the growth of the coherent line was observed. Some time was devoted

to check and recheck this result but there was no doubt that the mode was a $n = 11$ (or $n = -1$) mode but not the $n = 1$ mode as defined by Sacherer. The previous identification using a mountain range display (#249) was in error by a factor of -1 i.e., since the phase shift from bunch to bunch was -30° , it should have been called either $n = -1$ or $n = 11$.

Figure 1 is a plot of the line at $(11 f_0 + f_s)$ which gives a growth rate of 48 sec^{-1} at 1.6×10^{12} with a bunch length of $\approx 46 \mu\text{sec}$. There was not enough time remaining to measure the perturbed charge spectrum since this would have required individual fine tuning around each line. Instead, the intensity was lowered to the threshold of the instability, i.e., to $\approx 10^{12}$ and the spectrum of the unperturbed charged distribution was obtained (Fig. 2). No attempt was made to set up to measure the growth rate at a longer bunch length due to time limitations.

Conclusions

From the measurements of the growth rate for two different bunch lengths (ratio of 1.52:1), it is possible to estimate the frequency of the resonator causing the instability. Also, from the measurement of the threshold intensity and the unperturbed bunch spectrum, an estimate of the space charge Z/n for low frequencies can be made. The details of these calculations will be presented in an AGS Tech Note. We obtain a $Z/n \approx 158 \Omega$ assuming a longitudinal phase space distribution $\sim (1 - r^2)^{3/2}$ which has a spectrum similar to that shown in Fig. 2. For the resonator frequency, we obtain a value of $\approx 15.6 \text{ MHz}$. However, this assumes that the observed growth rates are due solely to a single resonance. We note that since the mode number is $n = 11$, the 40 accelerating gap impedances could contribute since they will be detuned above $12 f_0$ by beam loading. This effect will be greatest for the long bunch 8×10^{12} intensity case since the amount of detuning at 1.6×10^{12} will be much smaller. In fact, beam induced voltage at $(11 f_0 + f_s)$ and $(13 f_0 - f_s)$ was observed for the latter case where equal amplitude are expected. At higher currents, the signal at the $(13 f_0 - f_s)$ line should be greater and hence the net effect of 40 gaps could account for some fraction of the observed growth rate. Any correction for this effect would increase the calculated resonator frequency.

Finally, we must reexamine the results of Study #251 since we have an $n = 11$ not a $n = 1$ mode. Assuming again a fixed resonator frequency, the next mode that would be excited as the energy is raised would be the $n = 0, m = 1$ mode. However, this would be damped by the accelerating cavities and the low level rf control system. The $n = 0, m = 2$ mode would also be influenced by the main cavity impedance as the upper sideband would see more impedance than the lower. Since the unknown resonator apparently has a much narrower bandwidth, it could excite this mode at some value of f_{rf} . In fact, a very strong $n = 0, m = 2$ quadrupole mode was observed at 4.2658 MHz on 4/12/89 but at the time, this was attributed to the rf system itself and the bunch damper shape was used to suppress it. If, however, we assume that this was due to a resonance at $4 f_{rf} = 17.06$ MHz, then we note that for the initial $n = 11, m = 1$ mode at 4.182 MHz one has $4 \times 4.182 + 4.182/12 = 17.07$ MHz. Thus an $f_{res} \sim 17$ MHz would be consistent with the above bunch length estimate for f_{res} . We note, however, that one should have observed an $n = 10, m = 1$ instability at $f_{rf} = 4.0944$ MHz whereas the 4/12/89 measurements went down as low as 4.0 MHz without finding this mode. In view of these results, a repeat of the energy scan study should be considered.

1.6 x 10¹² 45.4 nsec Beam width 118 = 4.8360

FIGURE 1

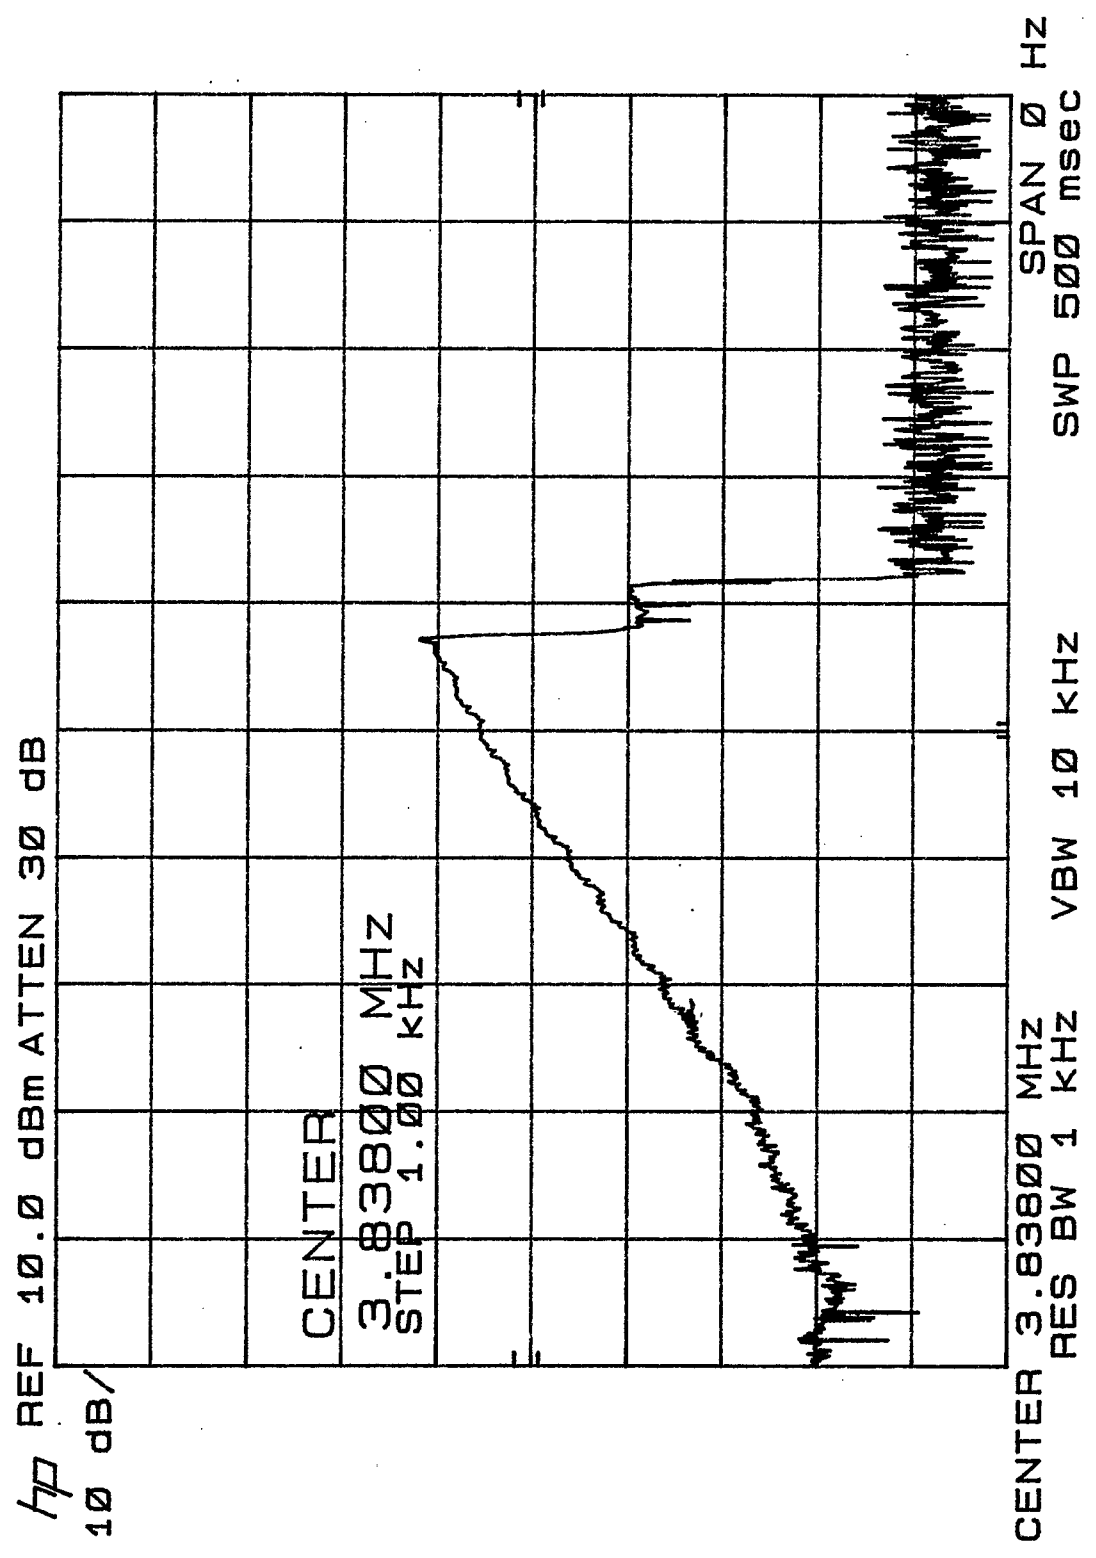


FIGURE 2

