

To Study problems associated with maintaining circulating beam on a 1 GeV flattop, in particular to construct such a flattop, accelerate beam across it, and measure tunes and chromaticities if possible.

L. Ahrens

November 1985

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

AGS Studies Report

Date(s) November 16, 1985 Time(s) 1600-2400

Experimenter(s) L. Ahrens, J. Gabusi, W. van Asselt

Reported by L. Ahrens

Purpose To study problems associated with maintaining
circulating beam on a 1 GeV flattop, in particular
to construct such a flattop, accelerate beam across
it, and measure tunes and chromaticities if possible

Observations and Conclusion

A one-second flattop was added to the AGS magnet cycle at a Gauss clock value of 3200 ± 100 counts/sec. The momentum measured from the rf frequency during the study was 1.7 GeV/c or 1 GeV K.E. The flattop in fact had a slope varying over ± 100 counts/sec during the study period. Ripple measured downstream of the main magnet power supply ripple filter was less than 100 volts peak to peak at 720 and 360 Hz and less than 25 volts at 60 Hz. These numbers can be transformed into currents in the 0.75 Henry ring magnet since $I_f = V_f \left(\frac{1}{L 2\pi f} \right)$.

$$I(720) < 29 \text{ mA}$$

$$I(360) < 58 \text{ mA}$$

$$I(60) < 88 \text{ mA}$$

The current in the magnet is approximately 300 amps, so the fractional variation in current or field is less than $8.8 \times 10^{-2}/300 = 3.0 \times 10^{-4}$. The corresponding radial motion at fixed momentum is

$$\frac{\Delta r}{R} = \gamma_{tr} 2 \frac{\Delta B}{B} \text{ or } \Delta r = (170 \text{ cm}) (3.0 \times 10^{-4}) = 0.05 \text{ cm},$$

a very small number in this situation.

The beam accelerated across this flattop without any significant tuning effort.

The remainder of the period was spent measuring tunes and radii in order to deduce the horizontal and vertical chromaticities. Tunes were

measured using the kickers in the tune meter. The frequencies of the resulting coherent oscillations were measured using a gated frequency counter and PUE signals filtered in the MCR. The effect of coupling between horizontal and vertical planes was observed to significantly affect the measured frequencies.

For the results given below, the coupling was minimized by tuning the low field "zero theta" skew quadrupole strings until a kick in one transverse plane did not show up in the other plane. The command for these skew quad strings was set to 1200 counts (a wide null), 400 counts above their normal setting.

The radius was measured using the equilibrium orbit PUE system. Figure 1 shows the PUE average vs. radial commands. Finally, Figure 2 gives the tune variation with radius. The implied vertical chromaticity is essentially zero. The horizontal is nearly -4. The newly refurbished BEAM program (see C. Gardner note, January 24, 1986) agrees with the vertical result but wants $\xi_{\text{Horizontal}} = -2$. Since a linear machine has $\xi_V \approx \xi_H \approx 1$ and adding sextupole uniformly depresses one and raises the other approximately equally, the BEAM result seems reasonable. On the other hand, a sextupole distribution giving ξ_H of -4 is not impossible. More work.

mvh

$\langle r \rangle_{PUE} \text{ (cm)}$

radius vs radial cmd.

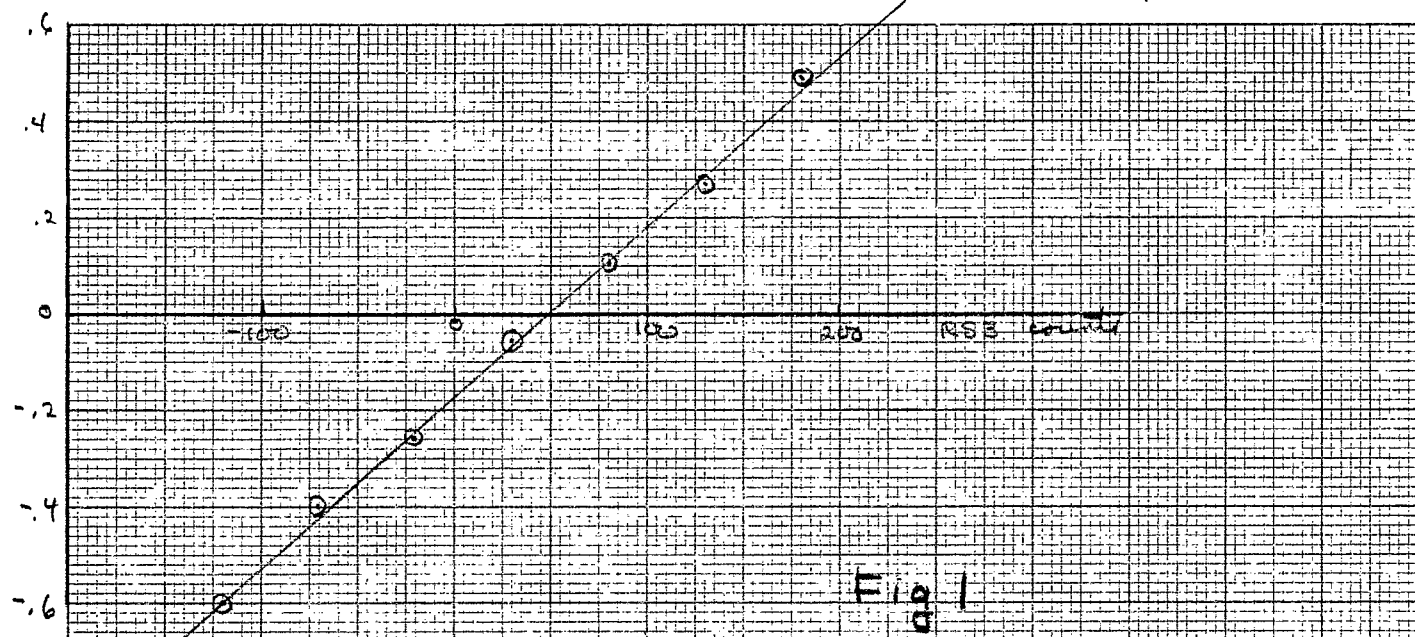


Fig 1

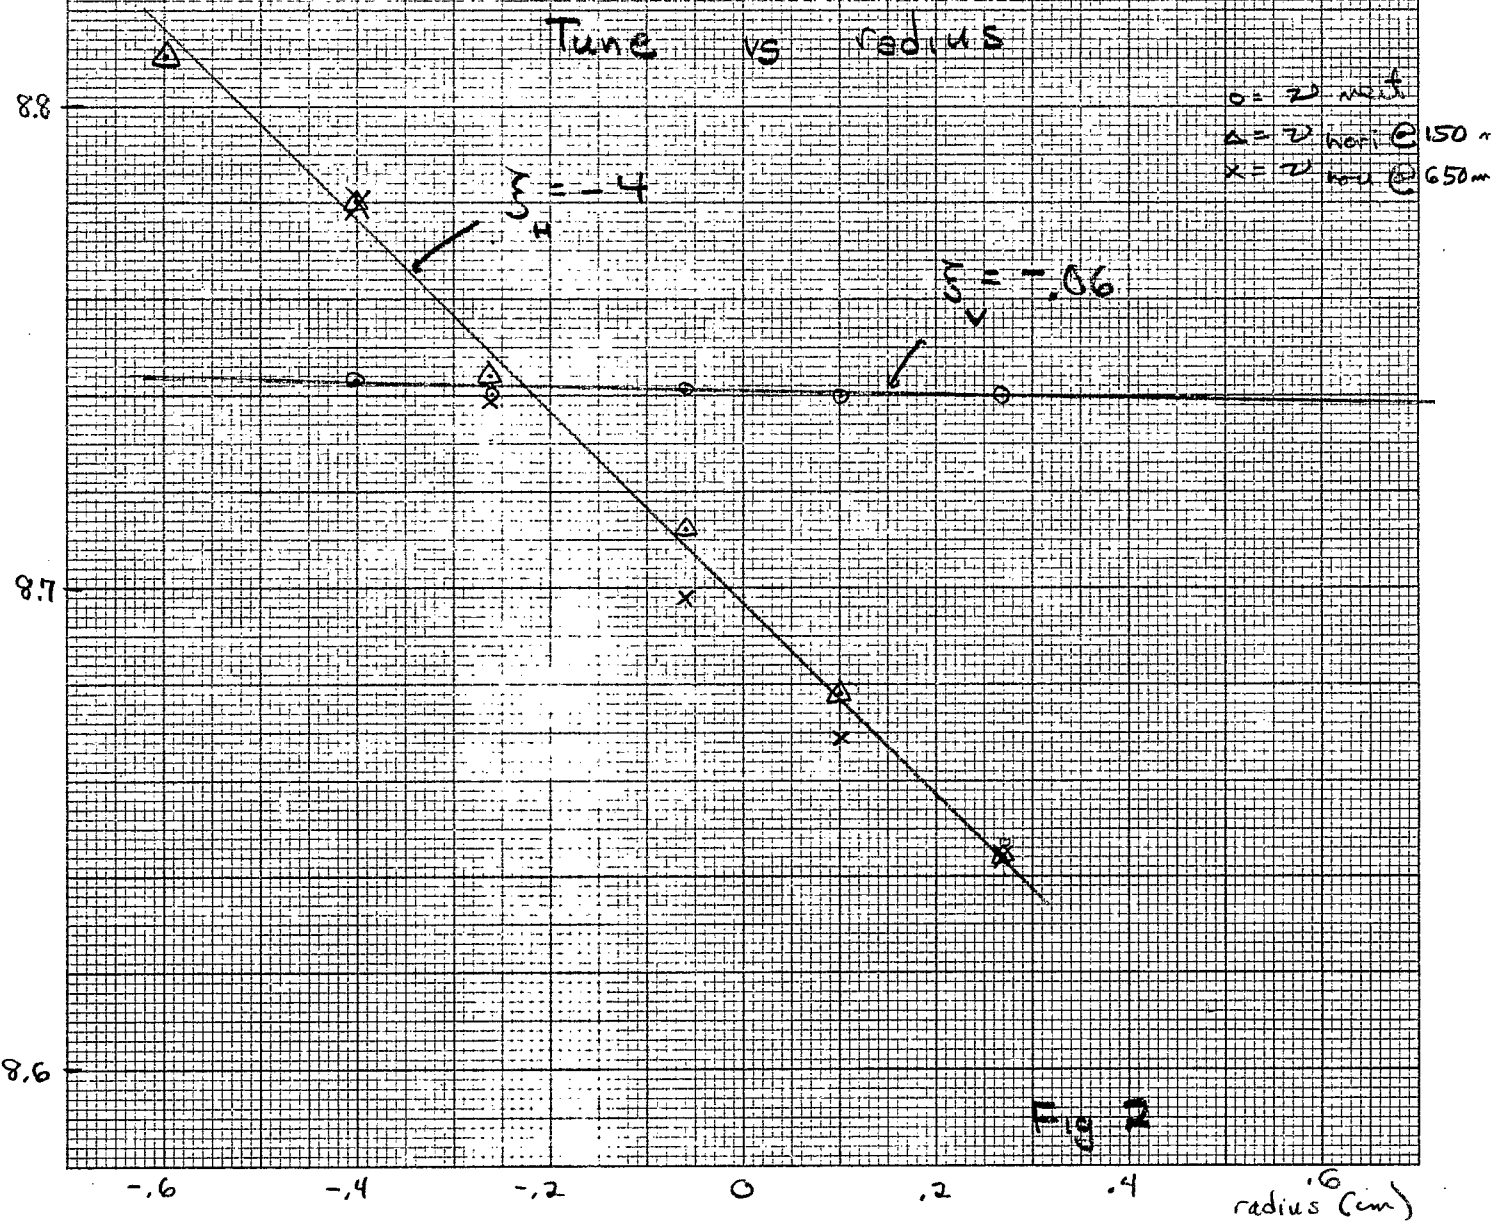


Fig 2