



BNL-104555-2014-TECH

AGS/AD/Tech Note No. 126;BNL-104555-2014-IR

# SLOW EXTERNAL BEAM LAYOUT AND OPTICS AT THE AGS

Y. Y. Lee

October 1976

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.E(30-1)-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

Accelerator Department  
BROOKHAVEN NATIONAL LABORATORY  
Associated Universities, Inc.  
Upton, N.Y. 11973

AGS DIVISION TECHNICAL NOTE

No. 126

SLOW EXTERNAL BEAM LAYOUT AND OPTICS AT THE AGS

Y.Y. Lee  
October 28, 1976

1. General

The Slow External Beam (SEB) at the AGS has been operational for many years and has been going through many generations of evolution. This report intends to describe the external beam as it exists at present. The extraction system of the SEB is reported elsewhere<sup>1</sup> and this report only deals with the elements outside of the AGS ring. The beam is split into three target stations A, B and C by means of magnetic septums. The nomenclature of the beam components are described in EP&S Technical Note 811.

2. Description of SEB

The slow extracted beam ejected by F10 ejector magnet goes through F11, F12 and F13 magnetic field and coming out at F13 straight section with the properties given in various papers.<sup>2</sup> Assuming the elliptical phase space contours, the phase ellipse parameters we used at F13 straight section are:

$$\begin{array}{ll} \alpha_x = -2.87 & \alpha_y = .987 \\ \beta_x = 1087. \text{ in.} & \beta_y = 146. \text{ in.} \\ \epsilon_x = .015 \text{ in.-mrad} & \epsilon_y = .0367 \text{ in.-mrad} \end{array}$$

The Secondary Emission Chamber (SEC) placed approximately 10 ft downstream of F13 monitors the intensity and serves as the input to the extraction servo. The small steering dipole (CD014) is to adjust the direction of the beam parallel to the .0243 in. thick magnetic septum (AD019) which splits beam between A and BC target stations. The split ratio is controlled by the F10 ejector current and CD014 which determines the position and the direction of the beam at AD019. The quadrupole triplet (CQ1, CQ2AB, CQ3) changes the optical prop-

erties of the beams such that go through various small apertures throughout the SEB system downstream. The .5 in. thick septum (AD1) is placed to separate the beam to A further away from BC. The beam to A station goes through bending magnets AD2-8 and AQ4AB, AQ5AB and AQ6 to make total bend of  $12^{\circ}$  and focus to A target. The small steering dipoles CD074, CD079 and CD114 to give the position and angle of the beam on 2nd .0216 in. thick magnetic septum (BD120), which separates the beam to B station and C station. The BD120 can be remotely moved and change skew angle to complement the function of CD074, CD079 and CD114. The beam goes through the vertically focusing quadrupole (CQ4) in order to enhance the split and change the beam to go through vertical aperture of .5 in. thick septums (BD1 and 2). The BD1 and 2 separates the beam to B from beam to C. The beam to B goes through dipoles (BD3, BD4, BD5, BD6) and quadrupoles BQ5, BQ6, BQ7&8, BQ9 to focus to the B target station. Total bend to the B station is 6.62 degrees. Rest of the beam goes through CQ5, CQ6, CQ7, CQ8 to focus at C target station. Each of the lines to target station also has at least two pitching components to adjust the height and angle of the beam. A small steering dipole which is controlled by servo system on the horizontal beam position at the target in order to keep the beam on the target. Since the beam momentum changes a good fraction of a percent during the spill, the bending magnets AD1-8 and BD3-7 are ramped by the electronic function generators.

### 3. Optics and Beam Envelopes

Using the computer program the ellipse parameters mentioned above were transported down through the beam lines. The beam sizes observed at various flags confirms the assumed parameters were approximately right. The detailed measurement was not carried out so far. Figure 2 shows the horizontal and vertical phase ellipse at A-C splitting thin septum (AD019) and horizontal phase ellipse at AD1 ( $\frac{1}{2}$  in. thick septum) with 1.5 mR kick from AD019. Because of the historical reasons AD019 septum is not placed in a most favorable optical condition. The most favorable condition would be the beam to be horizontally large and minimum divergence. The theoretical minimum loss at this septum is due to the septum thickness and apparent septum thickness due to phase space rotation within the length of the magnet and about 8%. The split loss can be varying depending upon the ratio of the beam to A and BC. Figure 3 shows the horizontal and vertical phase ellipse at BC splitting

septum BD120 and horizontal phase ellipse at BD1 with a .6 mR kick from BD120. The loss due to the septum thickness and phase space rotation is somewhat smaller, about 6%. Figures 4, 5 and 6 plot the horizontal and vertical beam envelopes assuming full beam goes through the system for C, B and A lines, respectively. The plots are for typical running conditions and it varies slightly according to the requirement at target stations. B and A lines are plotted from the splitting point. The distances shown are the distance from middle of the F13 straight section in inches.

The operational problems like minimizing the loss and changing the splitting ratios are going to be written up elsewhere.

#### Acknowledgments

YYL/lsk  
The slow external beam had gone through many years of improvement by Drs. L. Blumberg, A. Maschke and most recently, by H. Brown. Messrs. E. Jablonski, A. Soukas and H. Hsieh contributed their talent and ingenuity to the improvement.

#### References

1. M.Q. Barton, BNL Accel. Dept. Int. Report AADD-86, 1965.  
M.Q. Barton and J. Faure, BNL Accel. Dept. Int. Report AADD-131, 1967.
2. See for example, L. Blumberg et al., BNL Accel. Dept. Int. Report AGS Div. 69-12, 1969.

YYL/lsk

Distr: Accel. Dept. S&P  
Dept. Admin.




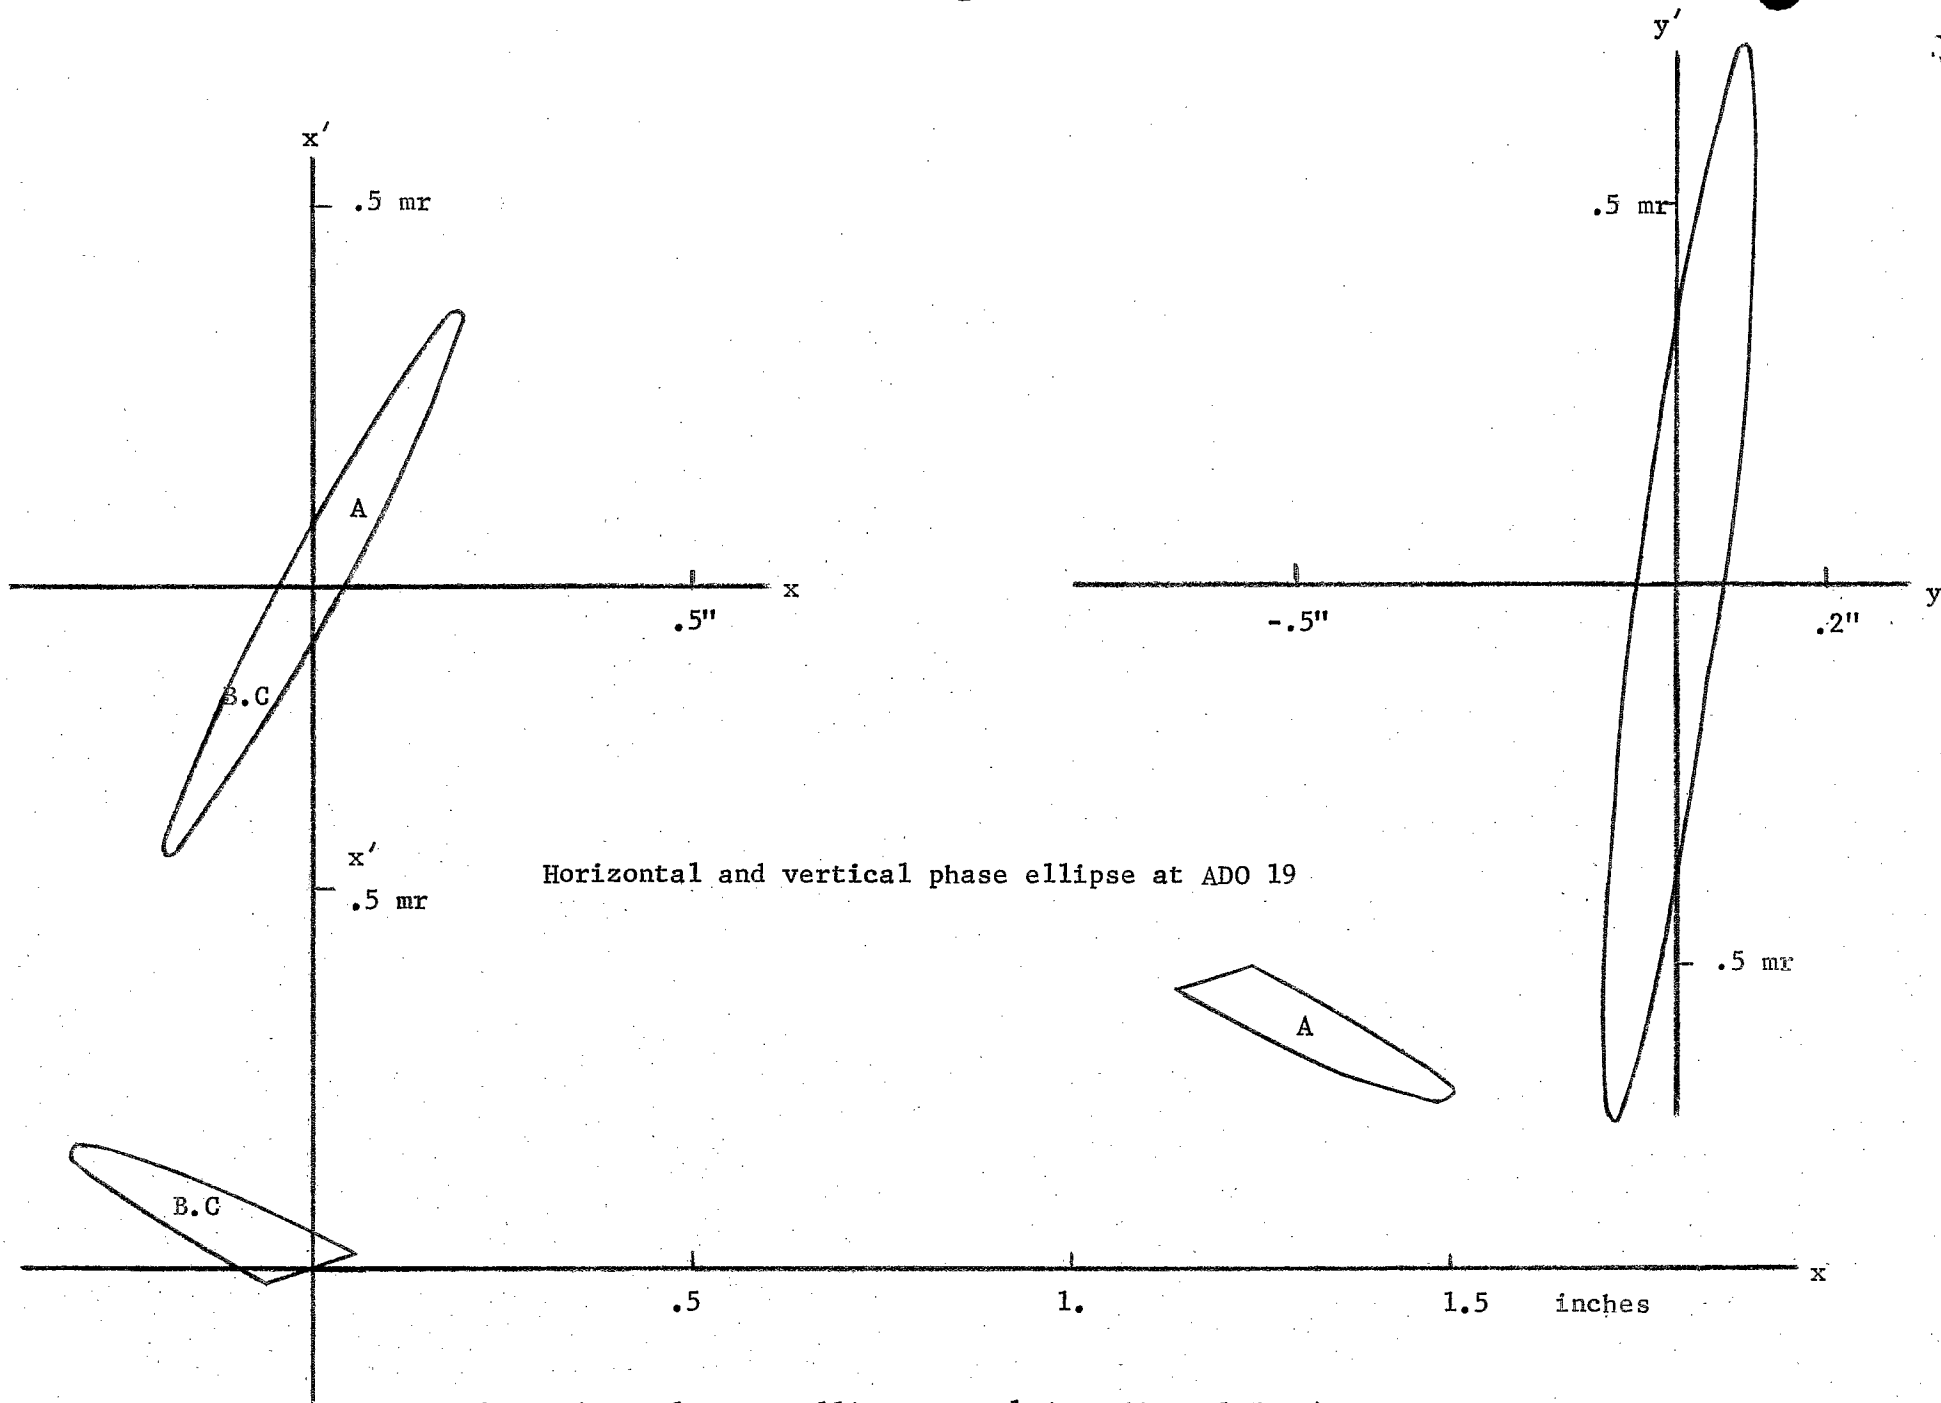


Fig. 2 Horizontal Phase Ellipse at AD1 (ADO 19 at 1.5 mr)

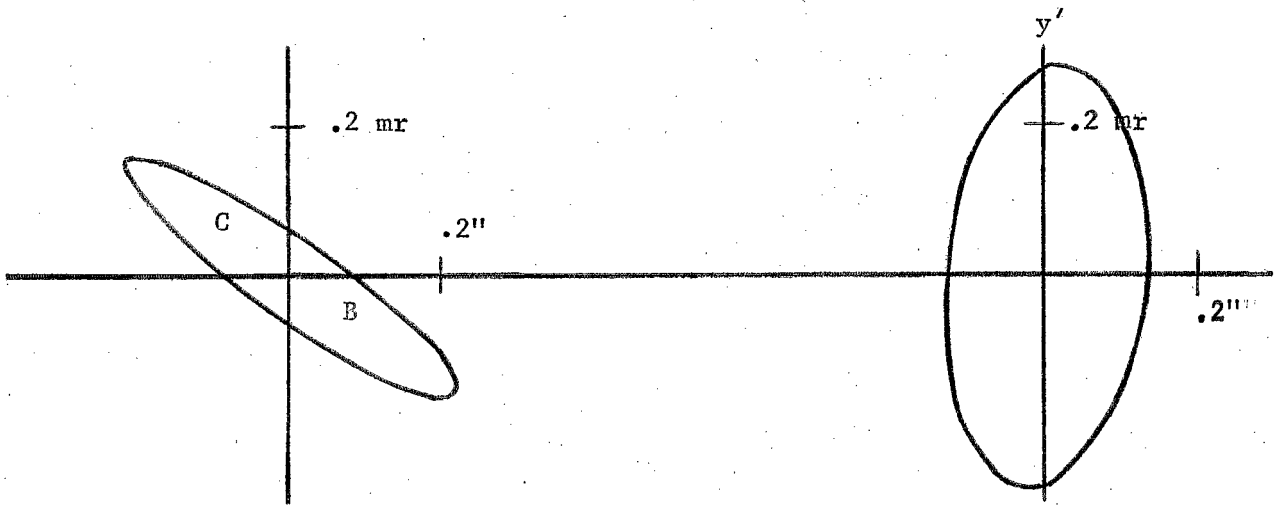

Horizontal and Vertical Phase Ellipse AD BD120


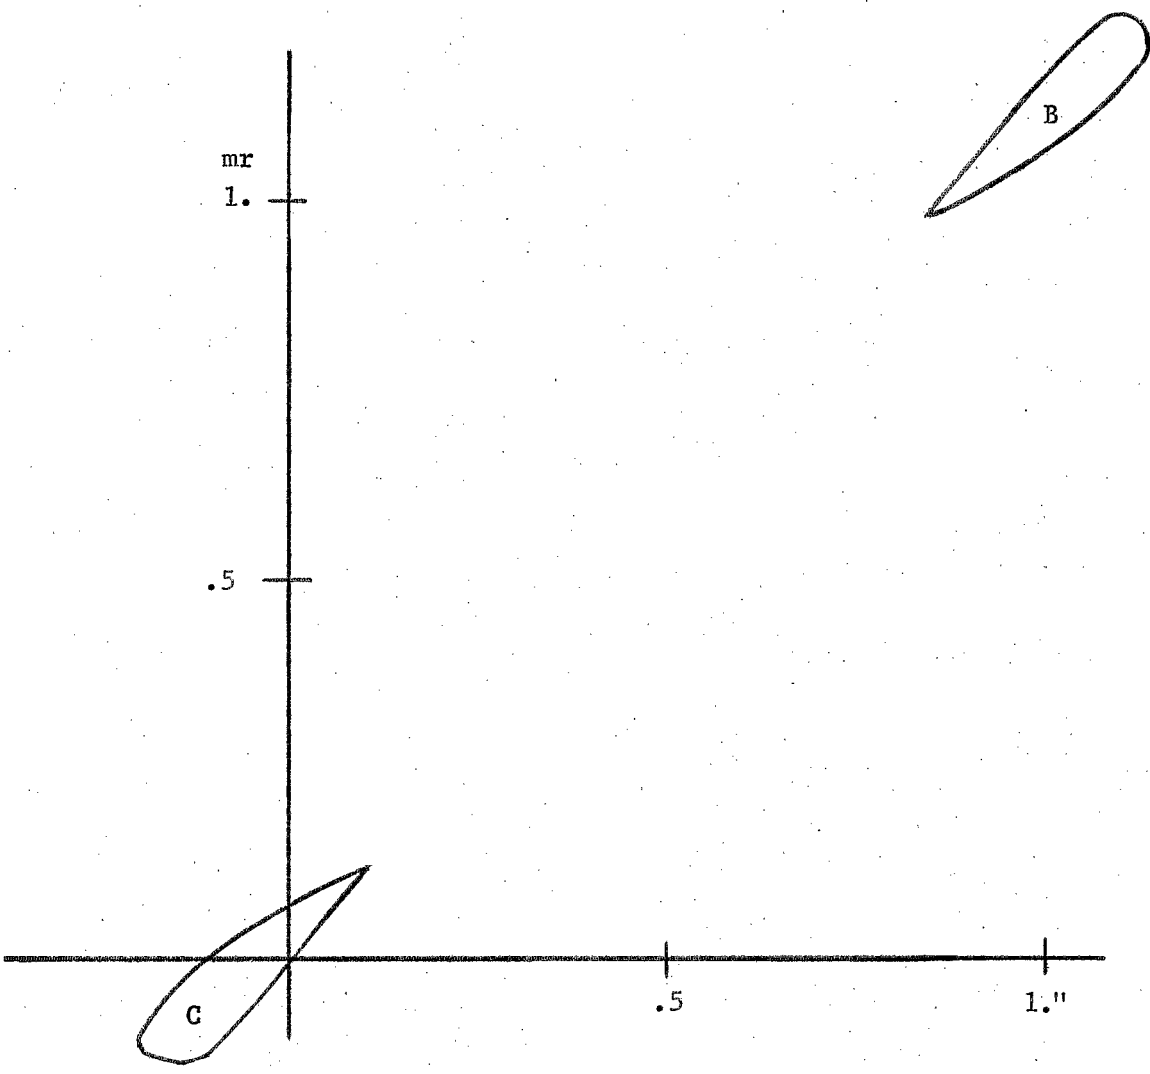


Fig. 3 Horizontal Phase Ellipse AD BD1 (BD120 at .6 mr)



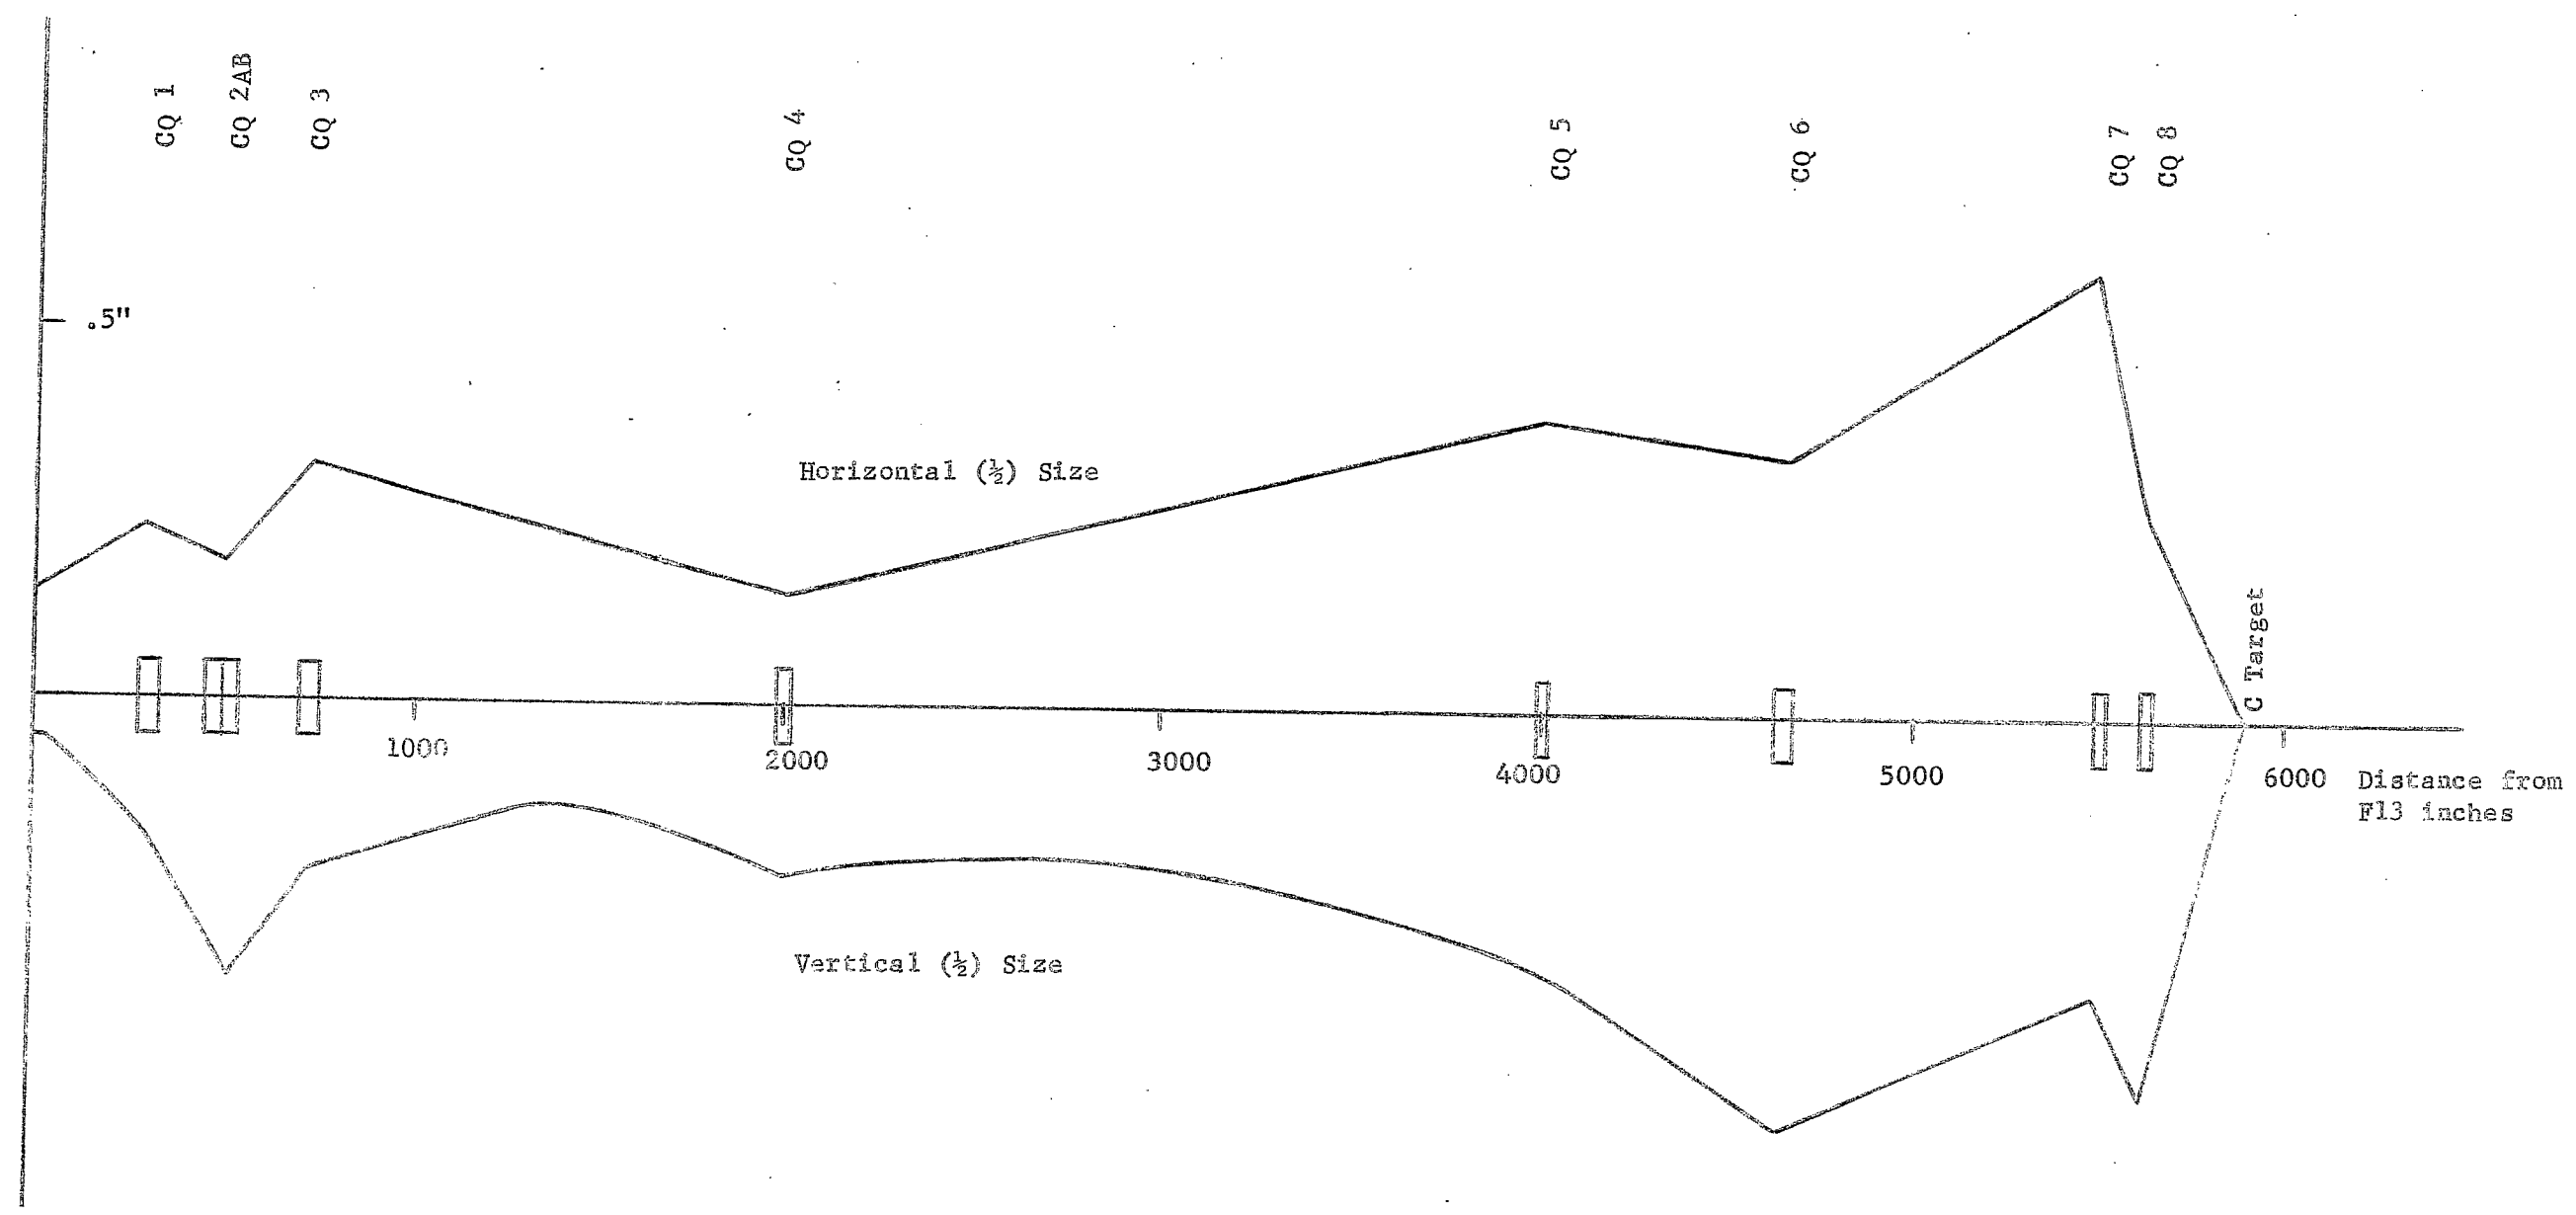

.5"

BD 120

BQ 4

BD 1  
BD 2

BQ 5  
BD 3  
BD 4  
BD 5  
BD 6  
BQ 6

BQ 7.8

BQ 9

Horizontal ( $\frac{1}{2}$ ) Size

1000

2000

3000

4000

5000

6000

B Target

Vertical ( $\frac{1}{2}$ ) Size

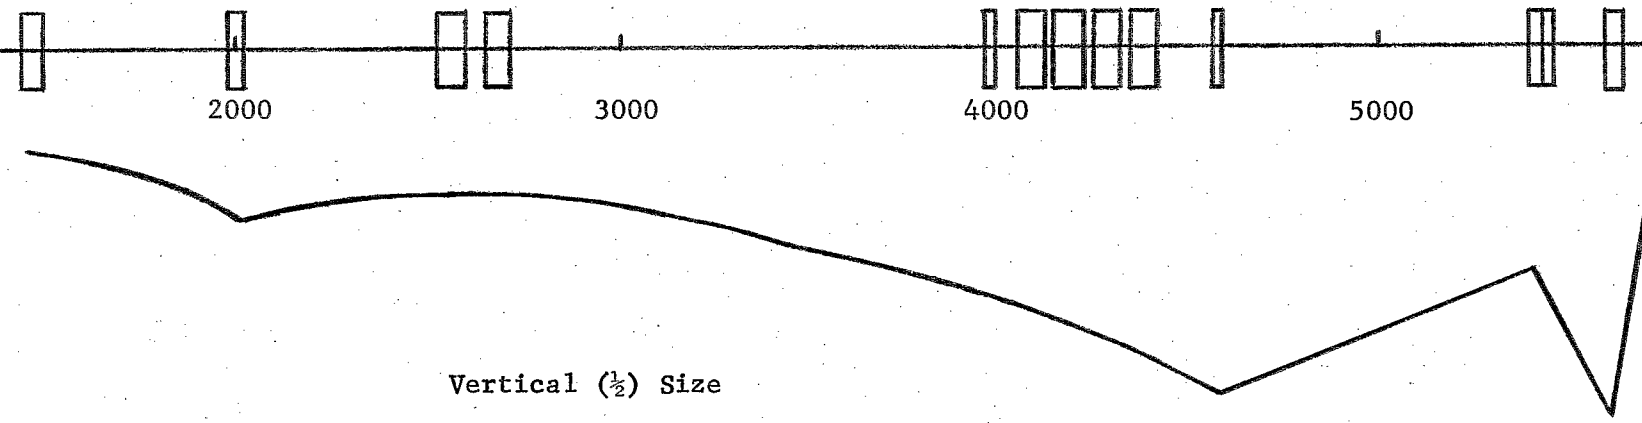


Fig. 5

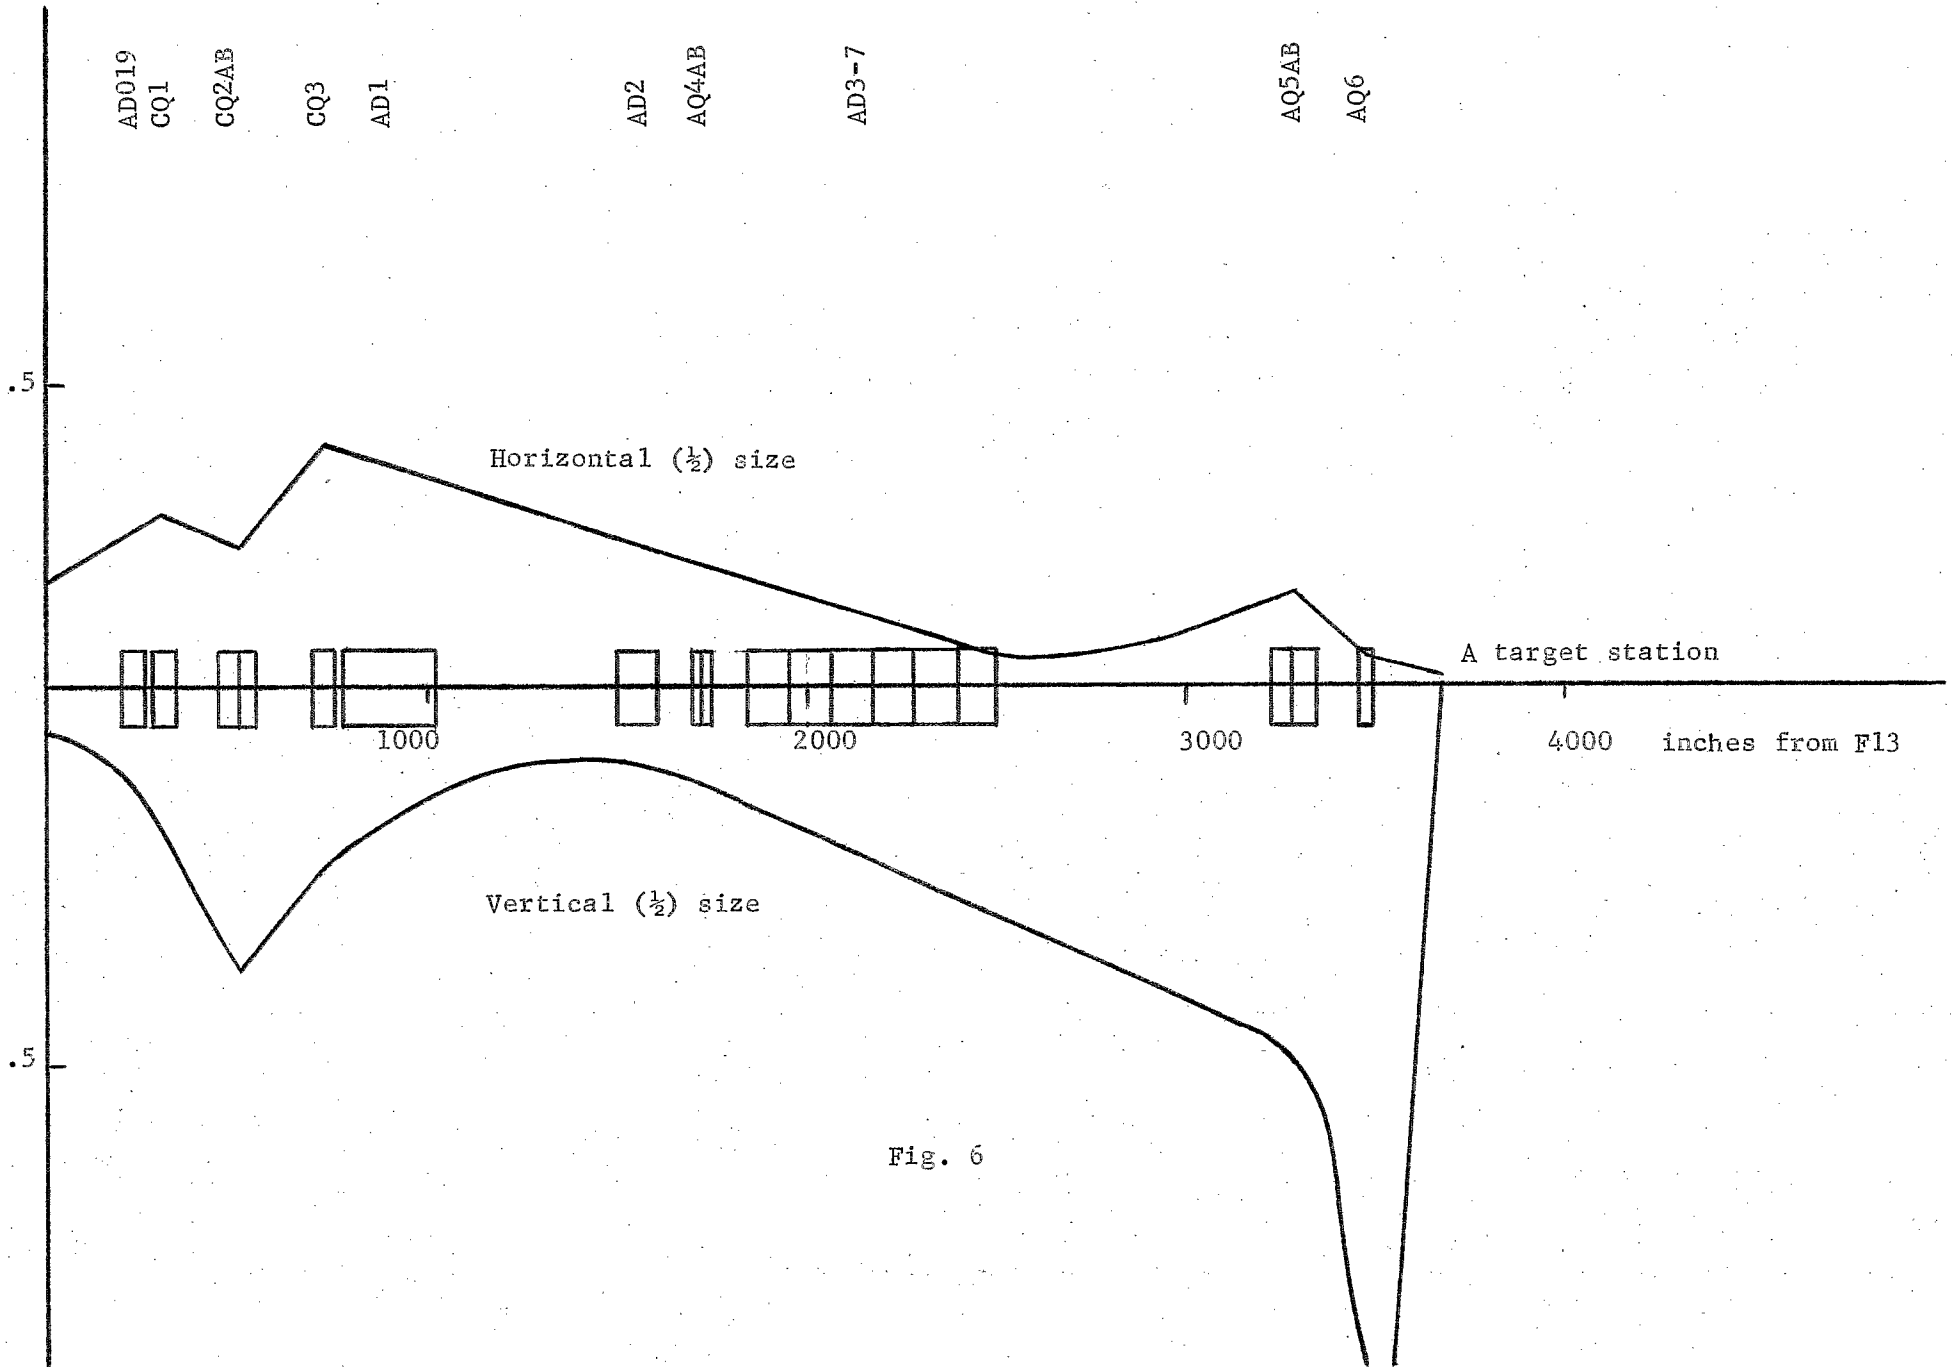


Fig. 6