

Chromatic Correction for the RHIC Lattice

S. Y. Lee

March 1986

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No. DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

RHIC-17

High Energy Facilities
Advanced Projects

BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, New York 11973

RHIC Technical Note No. 17

Chromatic Correction for the RHIC Lattice

S. Y. Lee

March 31, 1986

Chromatic correction for the RHIC lattice

S.Y. Lee

Brookhaven National Laboratory

Abstract

We study the chromatic correction for the RHIC lattice. The scheme requires three families of sextupoles in the inner arc and outer arc respectively. It works very well to correct the tune and betatron amplitude modulations.

Large colliders, such as RHIC ,require a careful correction for the chromatic properties, especially when the betatron function at the interaction point is tuned to a small value for the high luminosity experiments. Fig. 1 shows the natural chromaticity of the machine as a function of the betatron amplitude at the interaction point. We note that when the natural chromaticity becomes large, the nonlinear chromatic components also becomes larger. It is clear that the sextupole configuration and the sextupole location are important in the chromatic correction procedure(Ref.1). Fig.2 shows one example of the betatron amplitude of the betatron amplitude at the momentum $dp/p = -.01$. We observe that the x-beta function is highly modulating in the inner arc and well-behaved at the outer arc. On the other hand, the y-beta function is well behaved at the inner arc and highly modulating in the outer arc. This suggests that the stop-band contribution is in phase at qf in the inner arc and out of phase in the outer arc, i.e.


$$\frac{\Delta\beta}{\beta} = -\frac{\nu}{4\pi} \sum_p \frac{J_p e^{i\phi\varphi}}{\nu^2 - (\frac{p}{2})^2} \sim -\frac{J_p \cos(p\varphi + \delta)}{4\pi(\nu - \frac{p}{2})}$$

where the stop-band width, J_p , is given by (Ref. 2)

$$J_p = \int_0^G \beta(s) k(s) e^{-in\varphi(s)} ds \quad ; \quad \varphi_s = \frac{1}{\nu} \int \frac{ds}{\beta}$$

It is suggestive that two families of focusing sextupole and one family of defocusing sextupole in the inner arc are needed to correct these dependence(Ref. 3). Similar reversed configuration is needed in the outer arc. In this study, we shall try to calculate the effect of this correction scheme. Since the sextupole also contributes to the nonlinear effect in the betatron amplitude modulation, we shall use the interlace scheme with the phase advance of approximately 90 degrees per cell. Therefore the lowest order contribution due to the sextupole to the nonlinear effect is minimized. The sextupole scheme is outlined in the following diagram.

SCHEMATIC DIAGRAM OF SEXTUPOLE CORRECTION
ONE SEXTANT OF RHIC

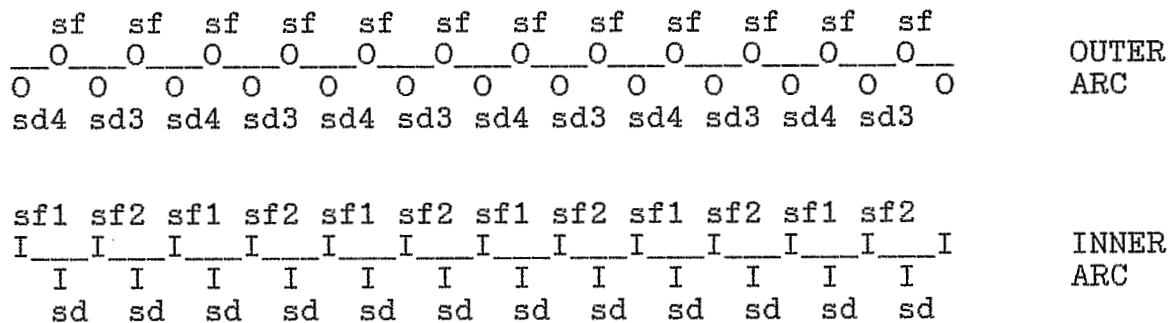

These sextupole configuration has been the extensively used in the other acclerator design work such as CERN, SLAC FNAL and SSC design center.

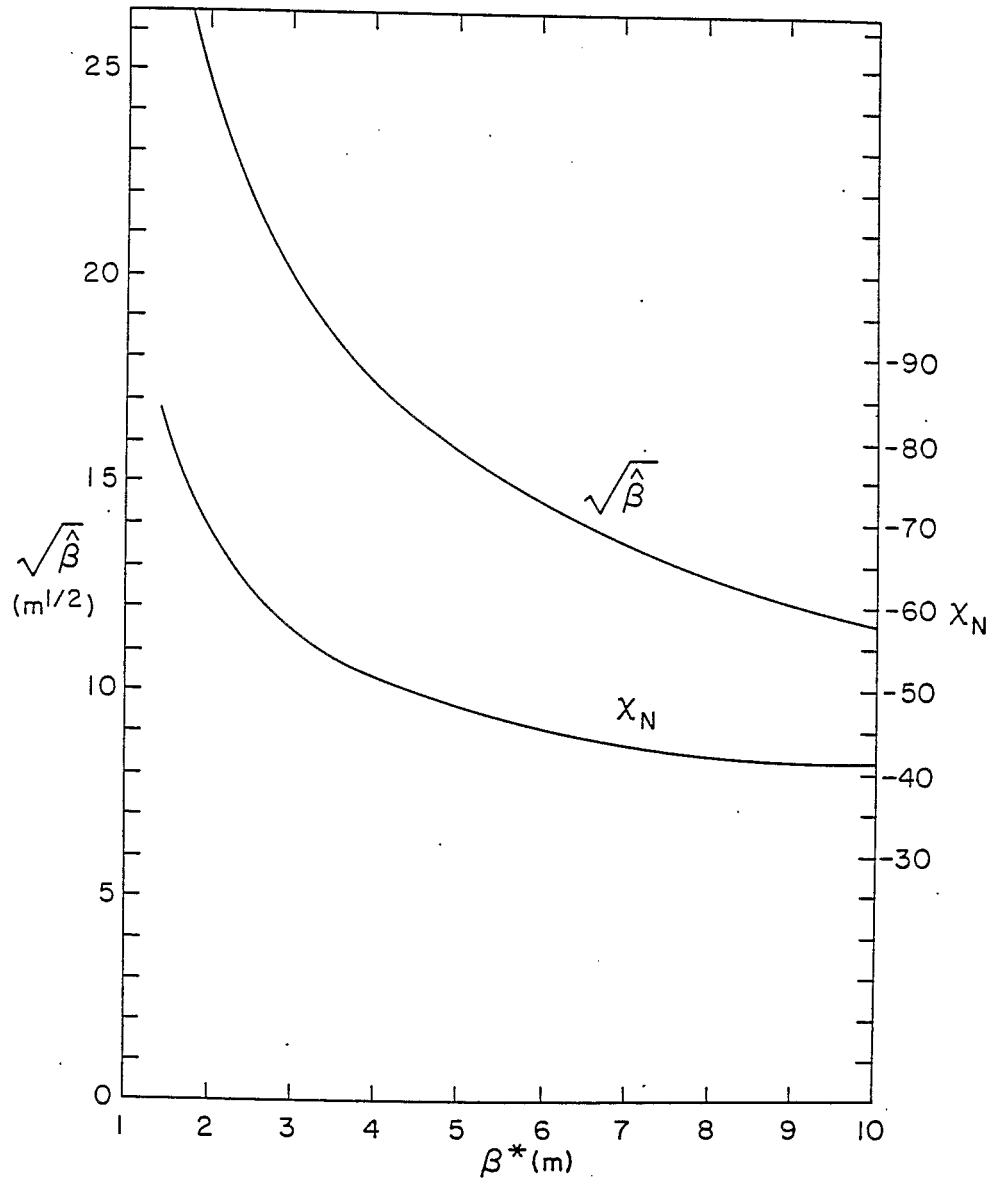


Fig. 1 The maximum amplitude function and the total natural chromaticity is shown as a function of β^* .

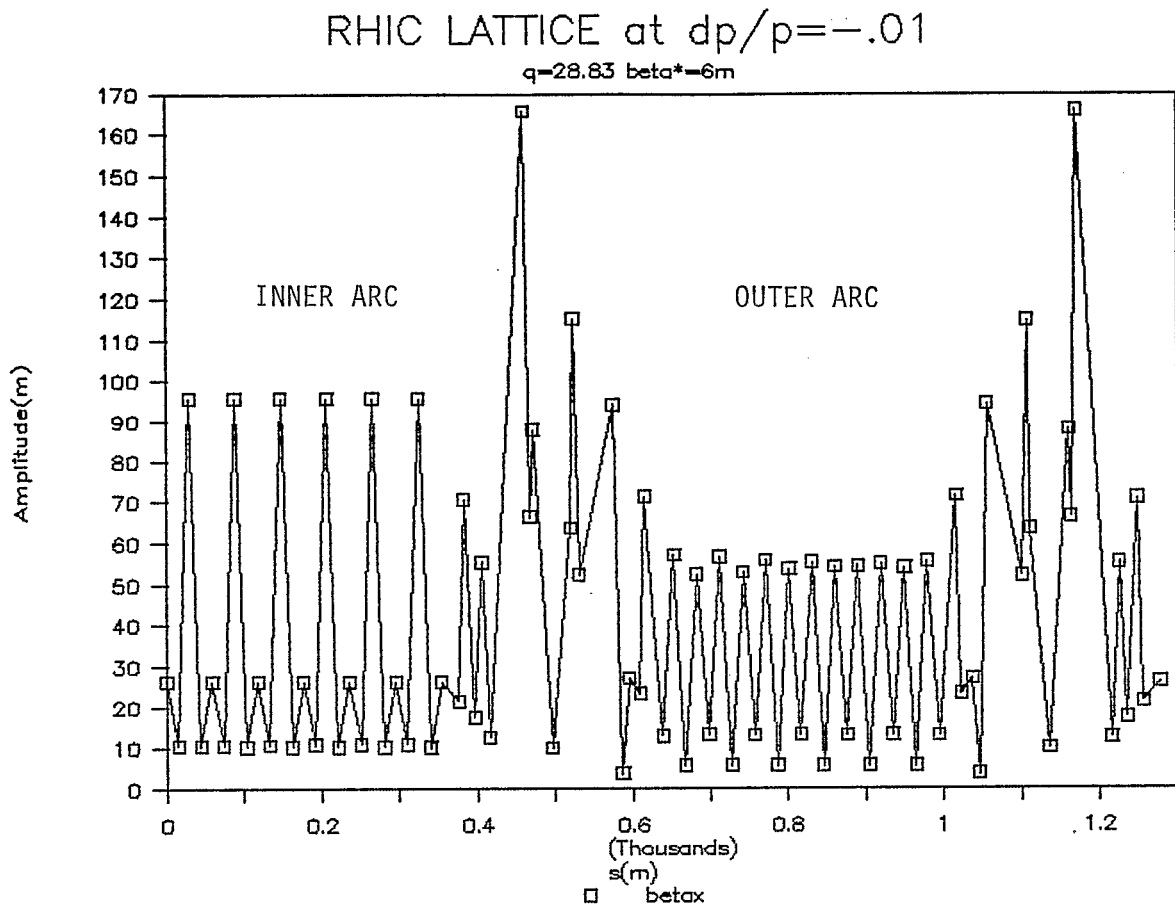


Fig. 2. Betatron amplitude modulation at $dp/p = -.01$. Shown in the graph is the horizontal plane betatron function. The corresponding y or vertical plane has large modulation in the outer arc only.

2.) Numerical calculations

We shall use the synch program(Ref. 4). The procedure is to use the sextupole strengths of the following four families of sextupoles, with

$$sf1 = sf + dsf$$

$$sf2 = sf - dsf$$

$$sd3 = sd + dsd$$

$$sd4 = sd - dsd$$

so that the total chromaticity will not be changed in the process of tuning the betatron amplitude modulation. We found that at $dsf=0.4*sf$ and $dsd=-.4*sd$, the amplitude modulation become rather small. Figs.3-7 show the chromatic dependence of the machine betatron functions for the setting of

$$sf1 = 1.4 sf$$

$$sf2 = 0.6 sf$$

$$sd3 = 0.6 sd$$

$$sd4 = 1.4 sd$$

The chromatic behavior of the machine with these sextupole configuration is acceptable. The corresponding tune vs. momentum dependence also reasonably good. The corresponding sextupole strength in the vertical sextupole correction is

$$ksd2 = \int B'' dx / \beta p \quad \square \quad -0.4032 \text{ (m}^{-2}\text{)}$$

The sextupole strength needed may be increased when $\beta^* = 3m$ mode is in operation.

3.) Discussion

We have used three family sextupole per sextant to study the machine chromatic correction problem. Satisfactory result has been obtained with minimum number of knobs. It is however important to note that the chromatic properties of the bare machine depends sensitively on the quadrupole distribution in the insertion region. The design of the insertion matching is a multi-variable problem. As an example, Figure 8 with $\beta^* = 6m$ and $q = 28.83$ gives a much smaller chromatic variations with momentum although the natural chromaticity is identical to that of the machine shown in Fig.1. In this study, we shows that in the case of a bad chromatic machine, we can also easily corrected the chromatic property with three-family of sextupoles in each sextant. We however would like a machine which has a machine with smaller nonlinear chromatic behavior. It is therefore the latter machine(quadrupole distribution in the insertion region) would be preferable. However multi-family sextupole correction scheme is definitely needed in the case of low beta insertion(e.g. $\beta^* = 3m$). The sextupole correction scheme should also work in this situation. We shall study the correction scheme for $\beta^* = 3m$ in the future.

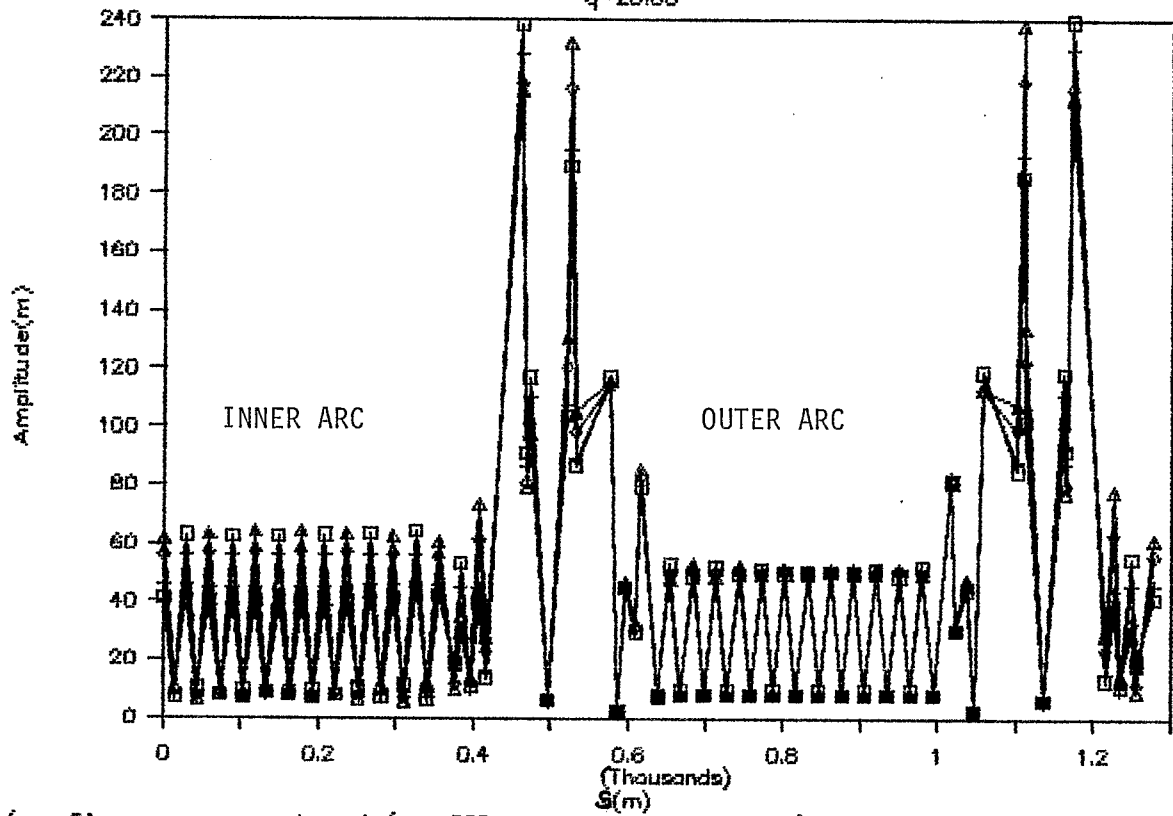
RHIC LATTICE at $\beta^* = 6m$ $q = 28.83$ □ $dp/p = -0.01$ + $dp/p = -0.005$ ◇ $dp/p = 0.005$ △ $dp/p = 0.01$

Fig. 3 Same as that of Fig.1 after the sextupole corrections
(six-family total)

RHIC LATTICE with six sextupole family

$q=28.83$ $\beta_{x^*}=-6m$


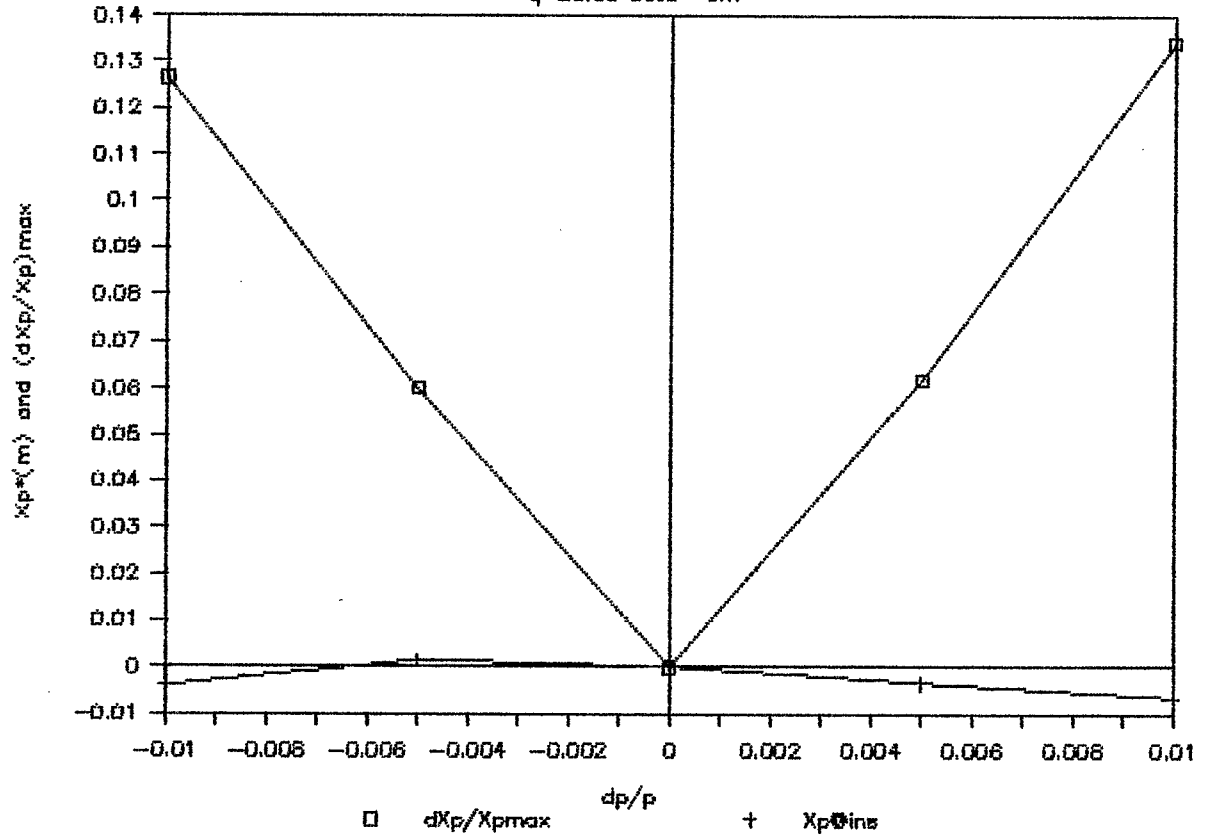


Fig.4 X_p vs dp/p

RHIC LATTICE with six sextupole family


$q=28.83$ $\beta_{x^*}=-6m$

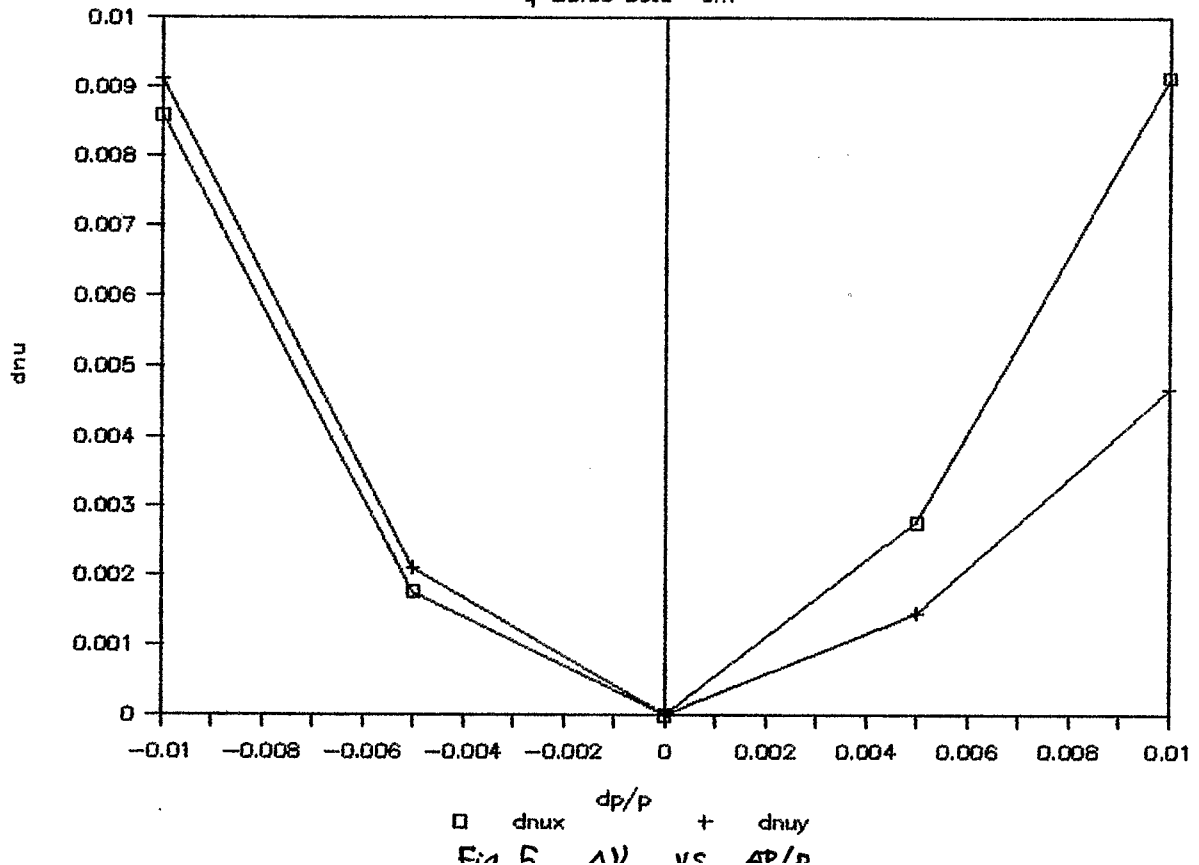

dn_x vs dp/p and dn_y vs dp/p


RHIC LATTICE with six sextupole family

$$q=28.83 \quad \beta^* = 6m$$

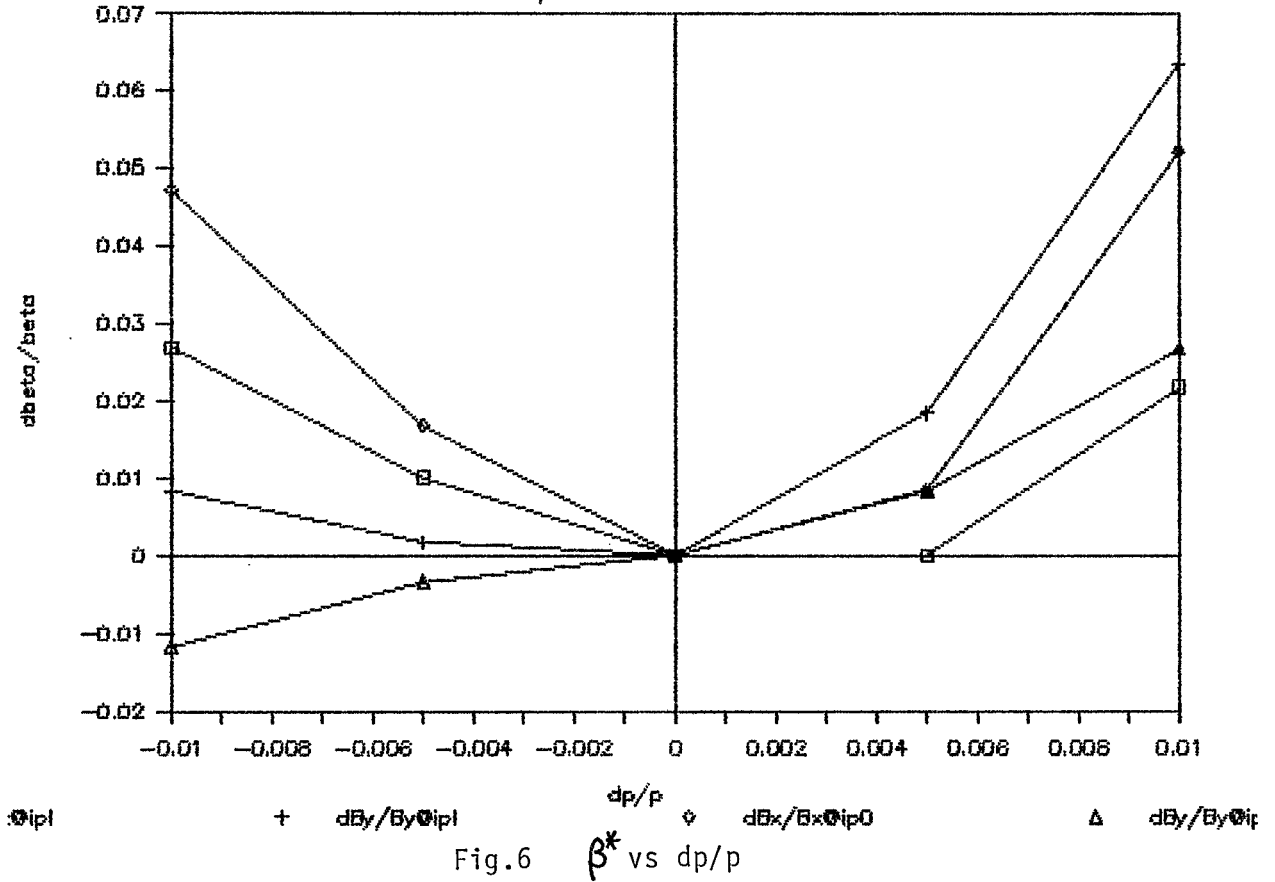

RHIC LATTICE with six sextupole family

$$q=28.83 \quad \beta^* = 6m$$

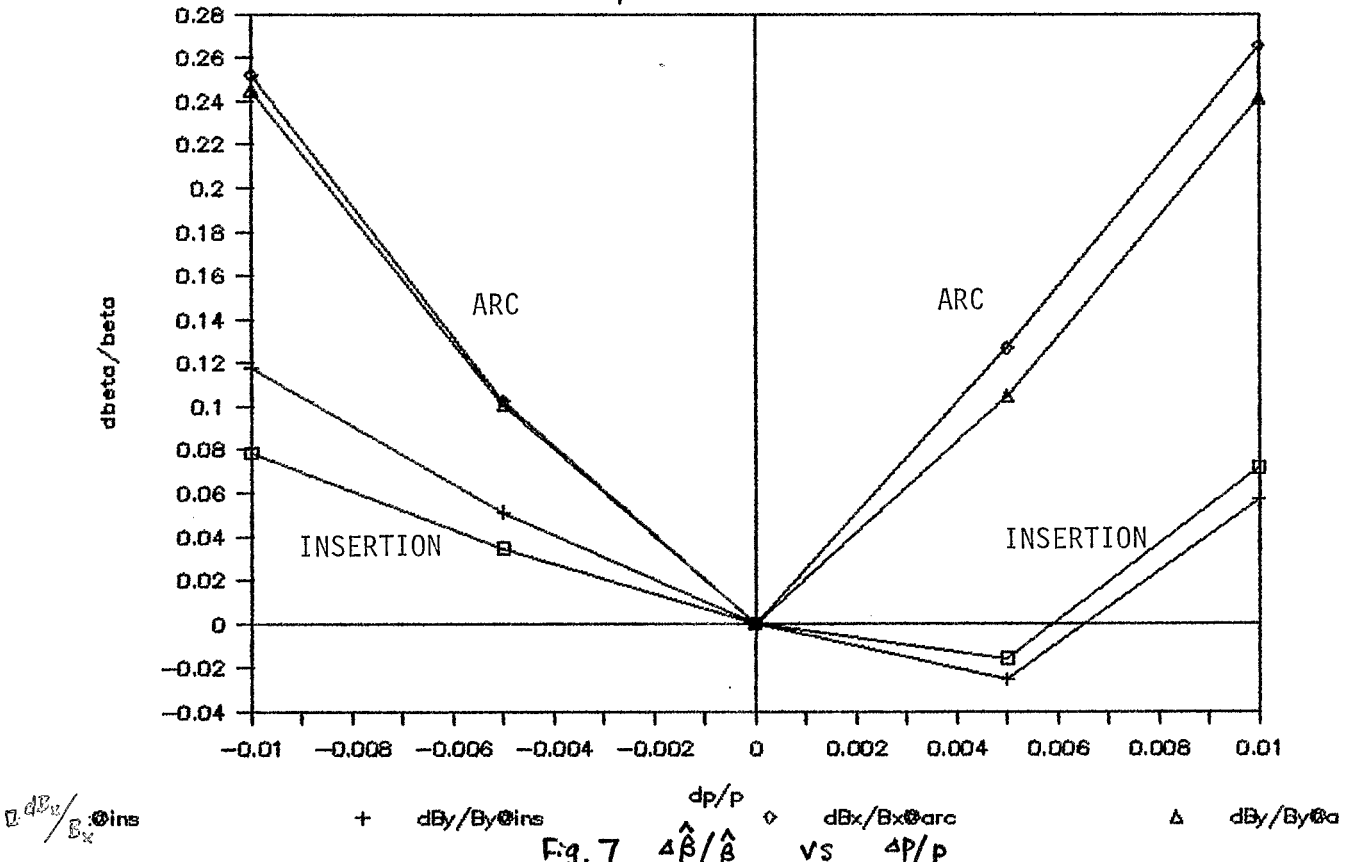

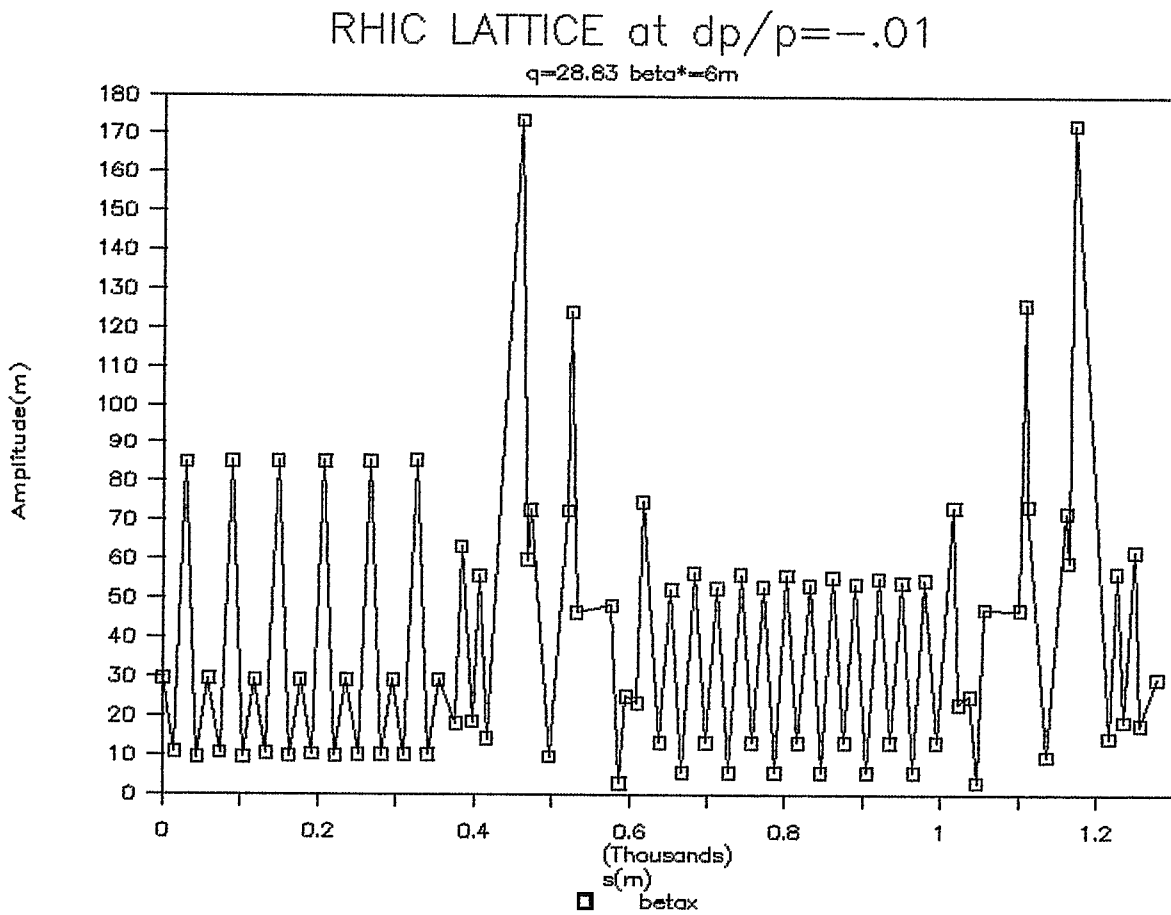


Fig. 8 Same as that of Fig. 1 with two family sextupole correction only. The quadrupole distribution in the insertion gives a slightly smaller stop-band width.

REFERENCES

- 1)G. Guinard, LEP Note 391
J. Hagel, CERN/LEP-TH/84-18
B. Autin, Simultaneous correction of chromaticity and orbit distortion in strong focusing machine. proceedings of the XI-th international conference on High-energy accelerators.
- 2)E.D. Courant and H. Snyder, Ann. of Phys.(N.Y.)3, 1(1958).
- 3)G. Parzen, RHIC-AP-28.
- 4)A.A. Garren, A.S. Kenney, E.D. Courant and M.J. Syphers,
A User's guide to Synch, FN-420.