



BNL-104487-2014-TECH

AGS/AD/Tech Note No. 53;BNL-104487-2014-IR

SLOW EXTERNAL BEAM SEPTUM AND EJECTOR ASSEMBLIES

F. Pallas

June 1968

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.AT-30-2-GEN-16 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

ACCELERATOR DEPARTMENT

BROOKHAVEN NATIONAL LABORATORY
Associated Universities, Inc.
Upton, L.I., N.Y.

AGS DIVISION TECHNICAL NOTE

No. 53

F. Pallas
June 26, 1968

SLOW EXTERNAL BEAM SEPTUM AND EJECTOR ASSEMBLIES

The diverting of a slow external beam from the Alternating Gradient Synchrotron is dependent on the installation of two vacuum box and drawer assemblies installed in the F-5 and F-10 straight sections of the ring.

Both vacuum boxes are weldments fabricated from 1-1/2" thick aluminum alloy 6061ST6 annealed after welding at 650^oF for two hours then air cooled. Vacuum testing was performed prior to flat machining and boring of all openings.

The F-5 septum box is 37-7/8 in. in length with an overall height of 17-in. and a depth of 26-5/8 in. Drawer thickness is not included in these dimensions.

The F-10 Ejector Box is 102 inches in length with an overall height of 17 inches and a depth of 26-5/8 inches. Drawer thickness are not included in these dimensions.

Ports of varying diameters are machined into the top, back and sides to accommodate pumpout connections, vacuum interlock for targeting mechanism, beam vacuum pipe connections, viewing ports for television monitoring, thermocouple connections, etc.

The two drawer assemblies contain magnets mounted on a freely sliding plate coupled through two articulated linkages driven by two independent motor drive assemblies which permit lateral movement of the magnets towards, or away from, the accelerated beam within a range of two inches.

The magnet assembly, supporting structure, motor-drive assemblies, electrical and water feed-through are all mounted on a drawer which when closed forms the front face of the vacuum box. Toggle clamps are provided on the box for rapid closing and sealing of the drawer. The drawer is equipped with a roller and rail assembly to permit full opening of the drawer permitting access

to all internal equipment. Rapid removal of the drawer assembly for servicing and replacement may be accomplished by disconnecting external water and electrical services and lifting the entire assembly off the rail system.

Motor Drive Assemblies

Two drive assemblies consisting of a Slo-syn motor, worm and worm wheel, rotate a bronze nut threaded on a captive hollow shaft. Through this shaft, the current carrying bus and water lines are passed for energizing and cooling the magnet. The nut and threaded shaft provide the lateral movement for magnet positioning. The 72 rpm motor with a worm ratio of 15:1 requires an 8 minute interval for a total travel of 2 inches.

Vacuum sealing of the drive shafts is through a stainless steel bellows assembly.

The motor drives are remotely operated from the AGS Control Room.

Position Indicator Assemblies

The Septum and Ejector assemblies are provided with two remote reading position indicator assemblies.

An encoder provided with shaft-mounted drum whose circumference is precisely 3.600-in. is driven by a .001-in. stainless steel tape attached to a bellows sealed shaft penetrating into the vacuum box. An insulating probe made from Mykroy fastened to this shaft maintains constant pressure against the magnet and follows any lateral movement. Constant pressure on the probe results from the atmospheric pressure operating on the external bellows floating flange. A Negator motor maintains constant tension on the tape and drum assembly. Total travel of the position indicator is two inches. Remote read-out of the magnet position is displayed on a decitrak digital display chassis located in the AGS Control Room. Position accuracy is ± 0.001 -in.

Space limitations on the Septum drawer face necessitated the locating of the two position indicators at the rear of the F-5 box. The indicator probes contact an aluminum angle fastened below the magnet assembly for beam clearance.

The motor drives and position indicator device were carefully calibrated.

After the magnet was surveyed to a previously determined location with respect to the ring magnet locating socket, See Figure #1 Ejector Assembly and Figure #2 Septum Assembly. The entire vacuum box was sealed and evacuated. The encoder assembly was rotated until a digital display of 0.500 for the Ejector Assembly and 1.500 for the Septum Assembly was obtained. The encoder was clamped in this position. This position is called the "neutral" position. Micrometer readings were taken of the flange separations on the Motor Drive Assembly and the Position Indicator Bellows Assembly. The motor devices were then energized to drive the magnet "towards the beam" for a total distance of 1/2-in. The drives were then utilized to drive the magnet out "from the beam" the total distance of two inches. Micrometer measurements were taken in 1/4-in. increments. The attached calibration chart records the decitrak readout (Travel) and compares the corresponding micrometer readout.

The Ejector and Septum Magnets can be "skewed" by energizing one of the drive assemblies while the other drive remains fixed. Skew limit switches operated by a Differential Bar Assembly restrict the amount of "skew" to protect internal water and electrical connections. The Septum Assembly may be "skewed" a total of 3/16-in. and the Ejector Assembly is limited to 3/8-in.

Separate limit switches prevent damage of the drive systems, bellows assemblies and position indicator assemblies. These switches sever the power applied to the Slo-syn motors and are set to trip at each end of the 2-in. range.


Distribution:

AGS Mechanical Engineers
AGS Operations Coordinators
AGS Administrative Group
AGS Division Heads
M. Barton
L. Blumberg
J. Curtiss
J. Fox
W. Gelfers
W. Glenn
J. Herrera
G. Levine
R. Nawrocky
E. Raka
A. Soukas
T. Toohig

F 10 EJECTOR ASSEMBLY

F. PALLAS

" NEUTRAL POSITION "

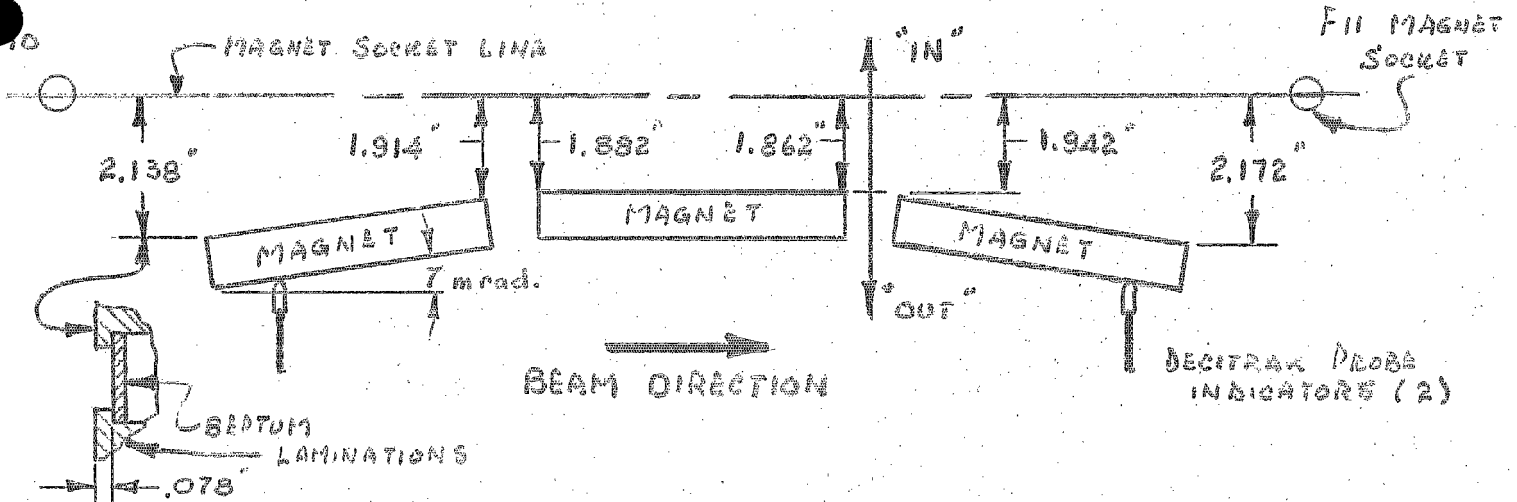

" NEUTRAL POSITION " IDENTIFIES UPSTREAM END OF EJECTOR MAGNET ASSEMBLY AS 2.138 INCHES FROM MAGNET SOCKET LINE AND DOWNSTREAM END OF ASSEMBLY AS 2.172 INCHES FROM MAGNET SOCKET LINE TO FACE OF STEEL.

FOR OPERATION -


DECITRAK READOUT OF :- 0.500 INDICATES " NEUTRAL POSITION "
 0.000 OR 3.600 INDICATES MAXIMUM " IN " POSITION
 2.000 INDICATES MAXIMUM " OUT " POSITION

LIMIT SWITCHES ARE SET AT :- 1.910" FOR MAXIMUM " OUT " TRAVEL FROM BEAM.
 0.500 " NEUTRAL POSITION "
 0.042 FOR MAXIMUM " IN " TRAVEL " TO " BEAM.

MAGNET ASSEMBLY MAY BE SKEWED A MAXIMUM OF $\frac{3}{8}$ ". ADDITIONAL LIMIT SWITCHES SET TO A DIFFERENTIAL BAR RESTRICT THIS MOVEMENT TO $\pm \frac{3}{16}$ ".

FIG. 1

F5 SEPTUM ASSEMBLY

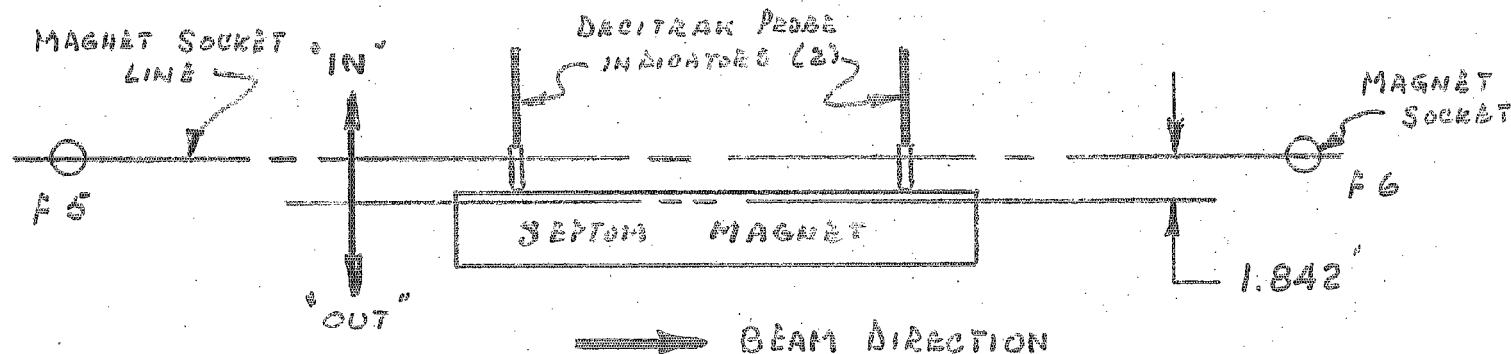"NEUTRAL POSITION"

"NEUTRAL POSITION" IDENTIFIES FACE OF COPPER SEPTUM AS 1.842"
FROM MAGNET SOCKET LINE.

FOR OPERATION -

DECITRAK READOUT OF: 1.500 INDICATES "NEUTRAL POSITION".
2.000 INDICATES MAXIMUM "IN" POSITION.
0.000 OR 3.600 INDICATES MAXIMUM
"OUT" POSITION.

LIMIT SWITCHES ARE SET AT :- 0.022 FOR MAXIMUM "OUT" TRAVEL
"FROM" BEAM.

1.500 "NEUTRAL POSITION"

1.892 FOR MAXIMUM "IN" TRAVEL
"TO" BEAM.

MAGNET ASSEMBLY MAY BE SKEWED A MAXIMUM OF $\frac{3}{16}$ ".

ADDITION LIMIT SWITCHES SET TO A DIFFERENTIAL BAR


RESTRICT THIS MOVEMENT TO $\pm \frac{3}{32}$.

BROOKHAVEN NATIONAL LABORATORY

BY PALLAS DATE _____
 CHKD. BY _____ DATE _____

SUBJECT SLOW EXTERNAL BEAM
INSTRUMENT CALIBRATION
 DEPT. OR PROJECT _____

SHEET NO. _____ OF _____
 JOB NO. _____

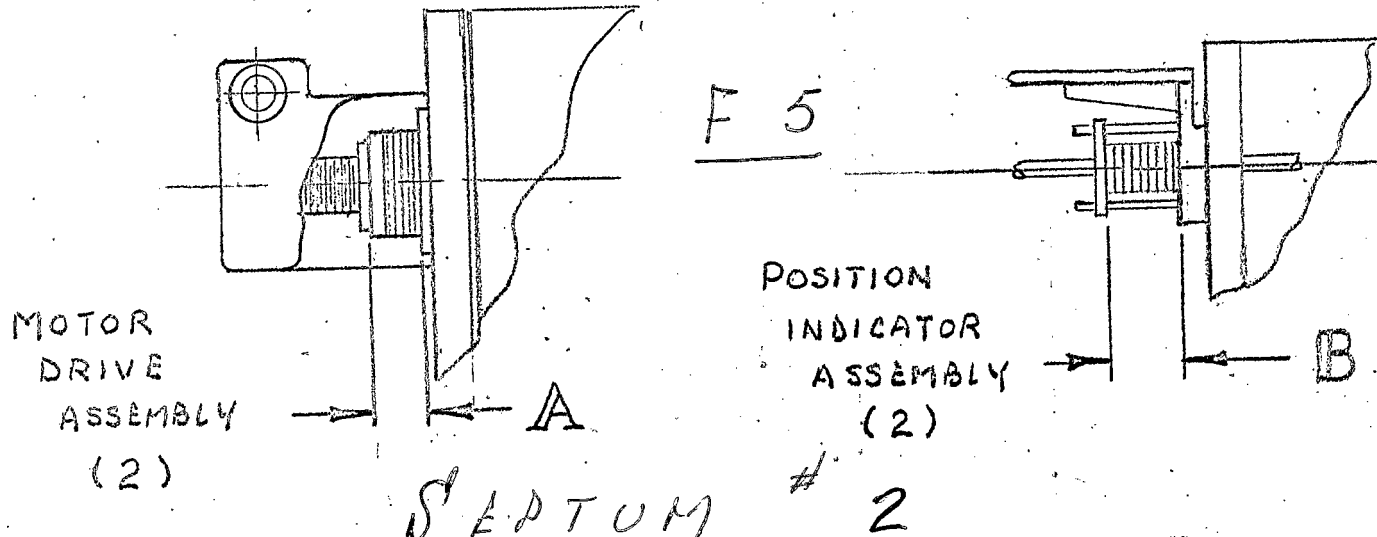

C A L I B R A T I O N					
MOTOR DRIVE ASSY		DECITRAK READ.		POS. INDICATOR	
DIMENSION "A"		I N C H E S		DIMENSION "B"	
DOWNSTREAM	UPSTREAM	DOWNSTREAM	UPSTREAM	DOWNSTREAM	UPSTREAM
1.937	1.954	1.900	1.904	4.056	4.041
2.098	2.109	1.750	1.746	3.901	3.903
2.346	2.363	1.500	1.502	3.654	3.644
2.589	2.599	1.250	1.250	3.405	3.377
2.837	2.859	1.000	1.000	3.152	3.142
3.091	3.107	0.754	0.750	2.902	2.888
3.355	3.370	0.500	0.500	2.648	2.639
3.591	3.605	0.254	0.250	2.408	2.395

TO BEAM ↑
 NEUTRAL
 ↓ FROM BEAM

CALIBRATED 18 JUNE 1968.

DIMENSIONS "A" & "B" ARE PHYSICAL MEASUREMENTS
 TAKEN WITH AN "INSIDE" MICROMETER.

DESIGN TOTAL TRAVEL = 2 INCHES.

APPROX. TIME REQUIRED = 8 MINUTES

LIMITS ARE SET TO TRIP AT :-
 1.896 DOWNSTREAM } IN TO BEAM
 1.892 UPSTREAM }
 TOTAL "SKBW" LIMIT = 3/16" 0.020 DOWNSTREAM } FROM BEAM


BROOKHAVEN NATIONAL LABORATORY

BY PALLAS DATE _____
 CHKD. BY _____ DATE _____

SUBJECT SLOW EXTERNAL BEAM
INSTRUMENT CALIBRATION

SHEET NO. _____ OF _____
 JOB NO. _____

DEPT. OR PROJECT _____

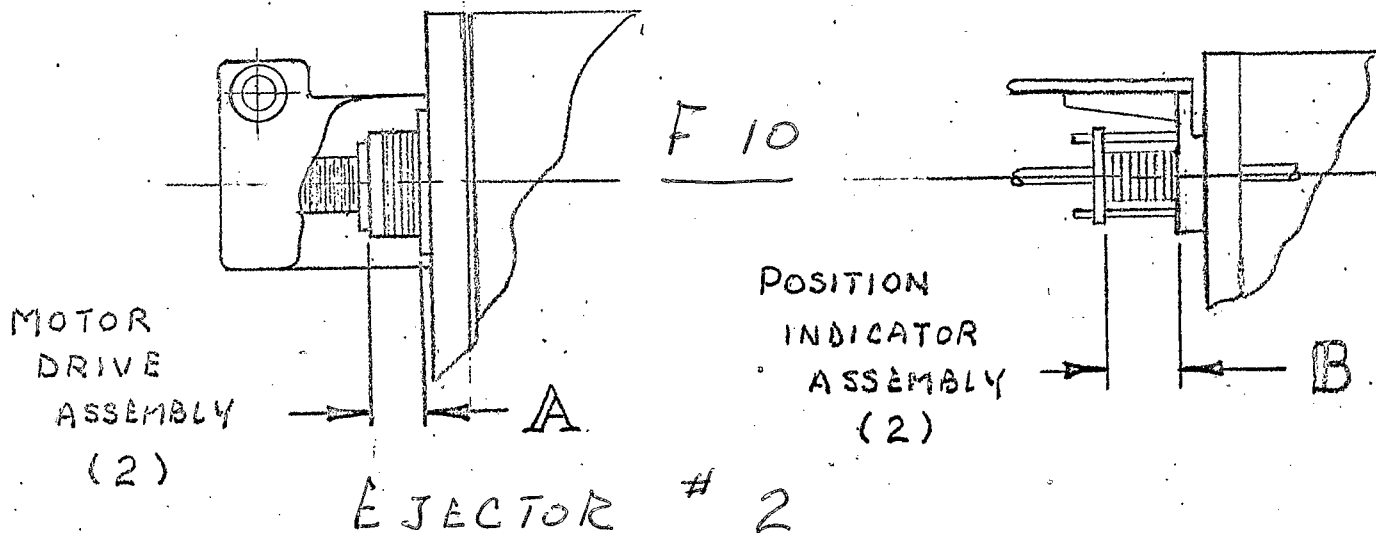

C A L I B R A T I O N					
MOTOR DRIVE ASSY		DECITRAK READ.		POS. INDICATOR	
DIMENSION "A"		I N C H E S		DIMENSION "B"	
DOWNSTREAM	UPSTREAM	DOWNSTREAM	UPSTREAM	DOWNSTREAM	UPSTREAM
1.963	1.991	0.125	0.122	2.287	2.241
2.098	2.126	0.250	0.253	2.413	2.369
2.348	2.375	0.500	0.500	2.652	2.611
2.590	2.618	0.750	0.754	2.905	2.861
2.837	2.863	1.000	1.000	3.114	3.156
3.094	3.121	1.250	1.250	3.362	3.406
3.340	3.367	1.500	1.503	3.656	3.616
3.596	3.621	1.751	1.750	3.906	3.864
3.758	3.785	1.908	1.908	4.064	4.026

TO BEAM ↑
 NEUTRAL
 ↓ FROM BEAM

CALIBRATED 18 JUNE 1968

DIMENSIONS "A" & "B" ARE PHYSICAL MEASUREMENTS
 TAKEN WITH AN "INSIDE" MICROMETER.

DESIGN TOTAL TRAVEL = 2 INCHES.

APPROX. TIME REQUIRED = 8 MINUTES

LIMITS ARE SET TO TRIP AT :-


1.911" DOWNSTREAM	} FROM BEAM.
1.910" UPSTREAM	
0.045" DOWNSTREAM	} TO BEAM.
0.042" UPSTREAM	

TOTAL "SKEW" LIMIT = 3/8

F10 EJECTOR VACUUM BOX #1


UPSTREAM SURVEY IN RING

3.3.68 F. DALLAS

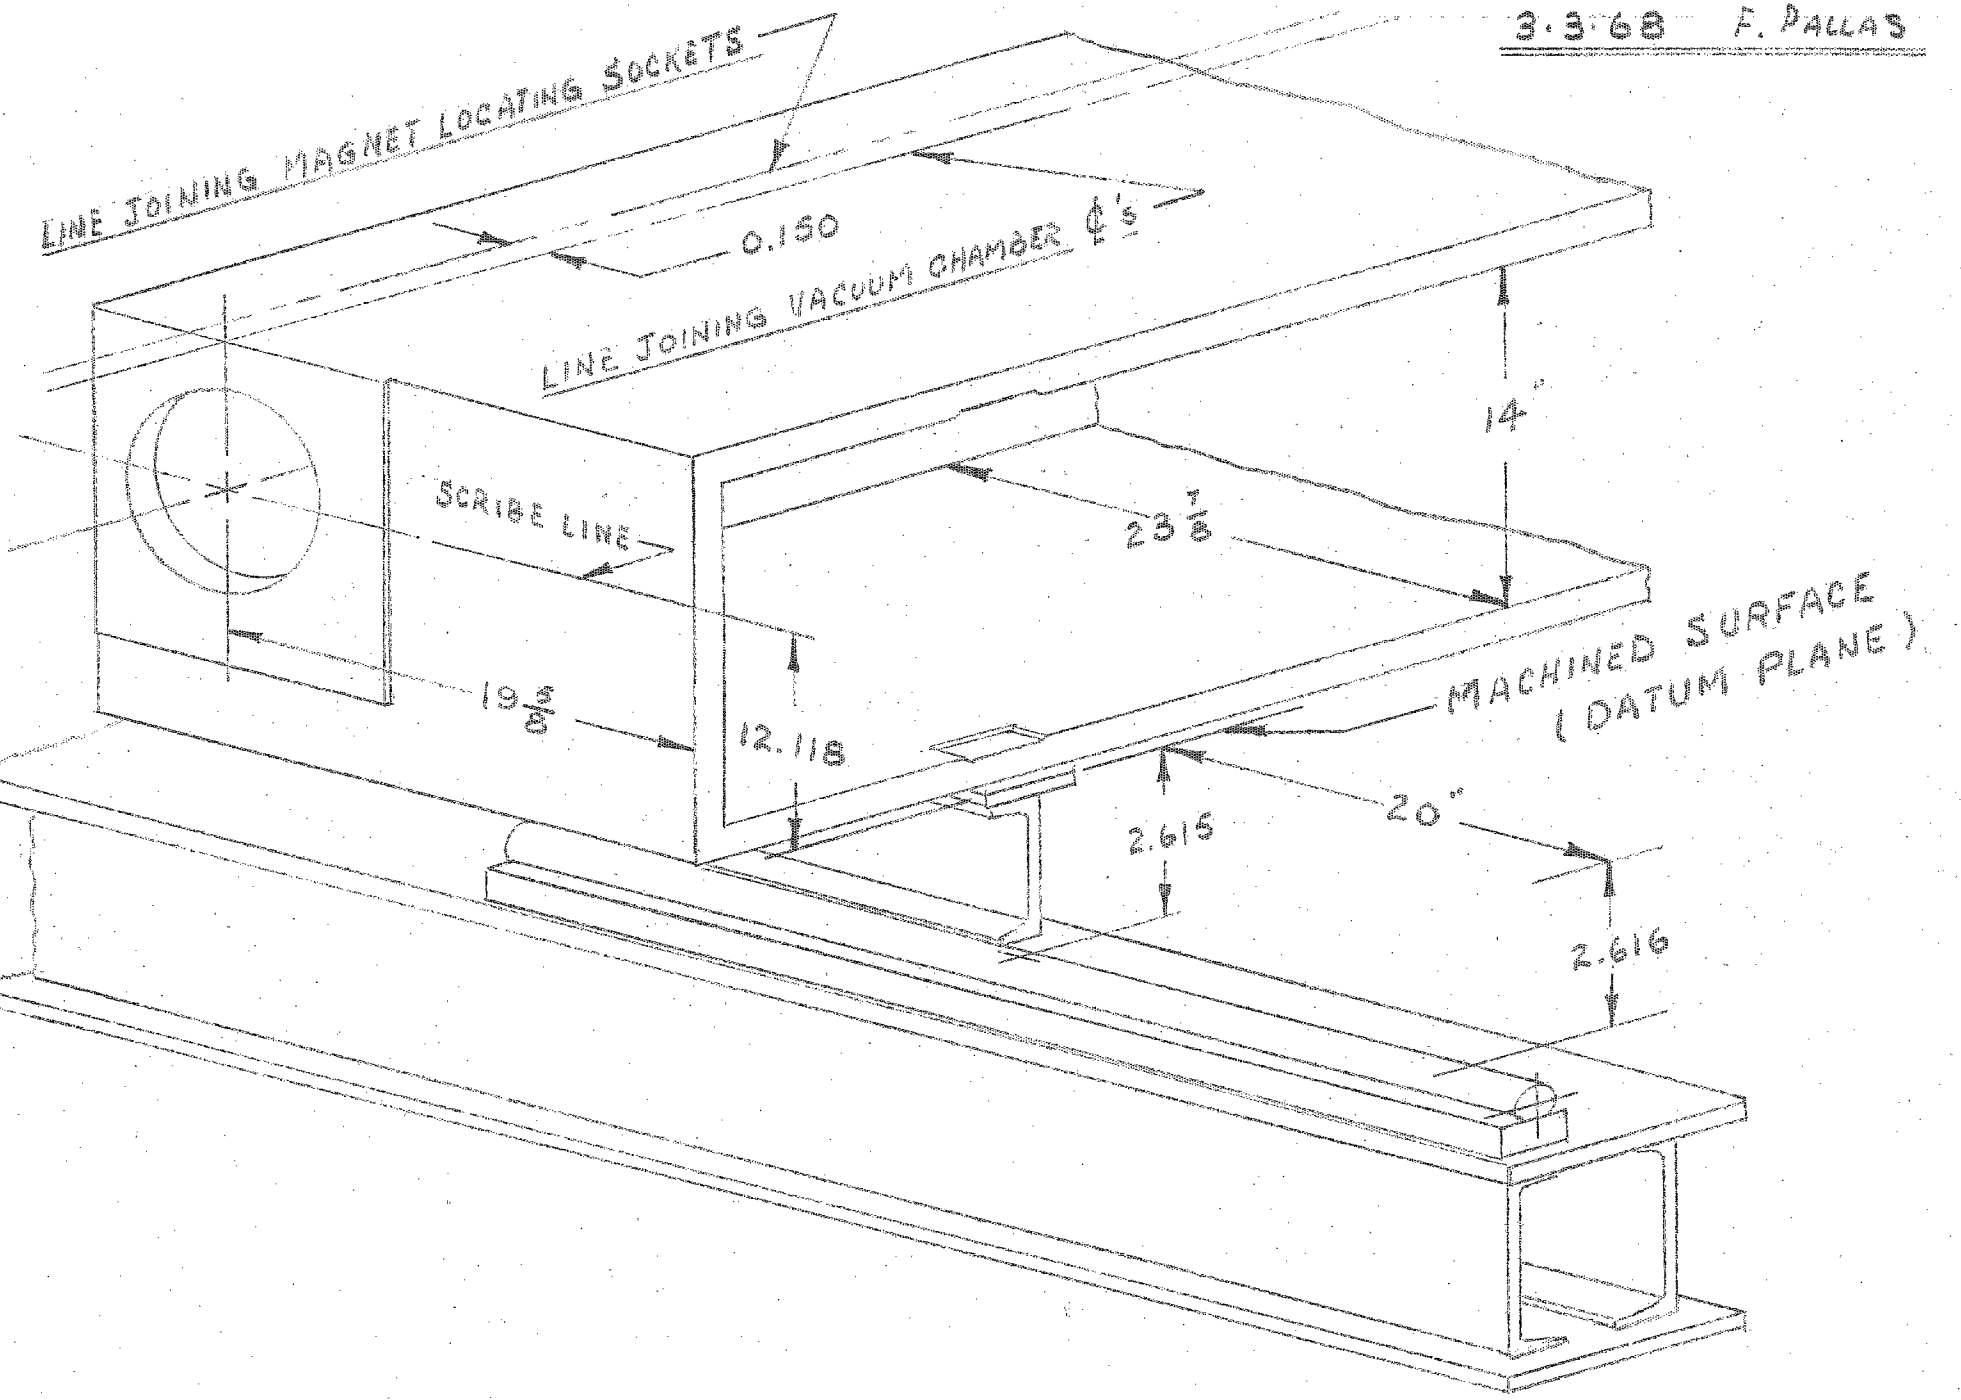


F10 EJECTOR VACUUM BOX # 1

DOWNSTREAM SURVEY IN RING

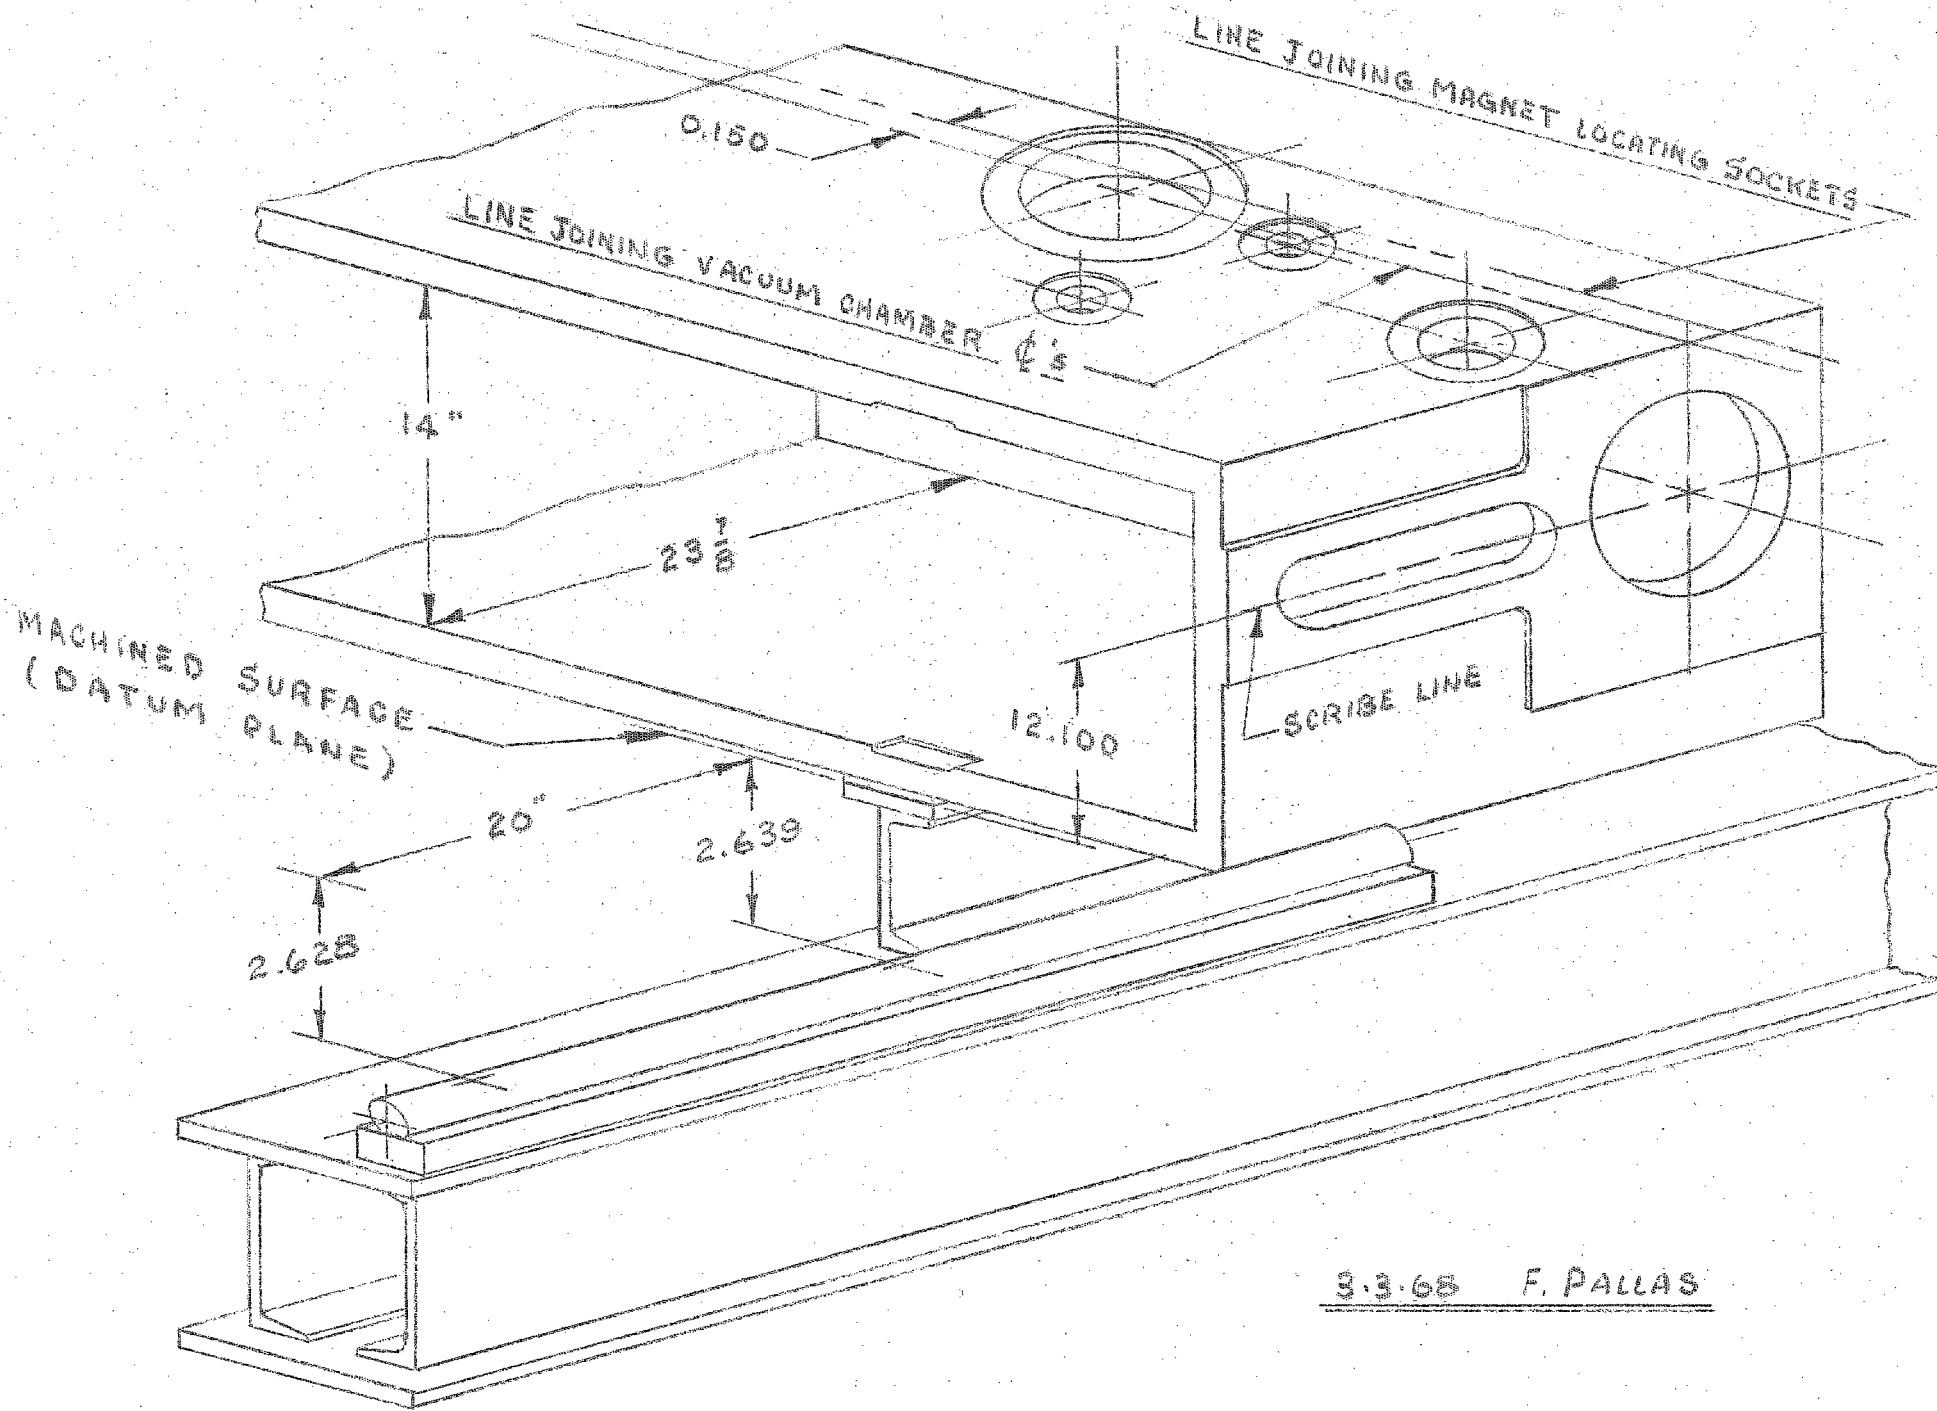

3.3.68 F. PALLAS

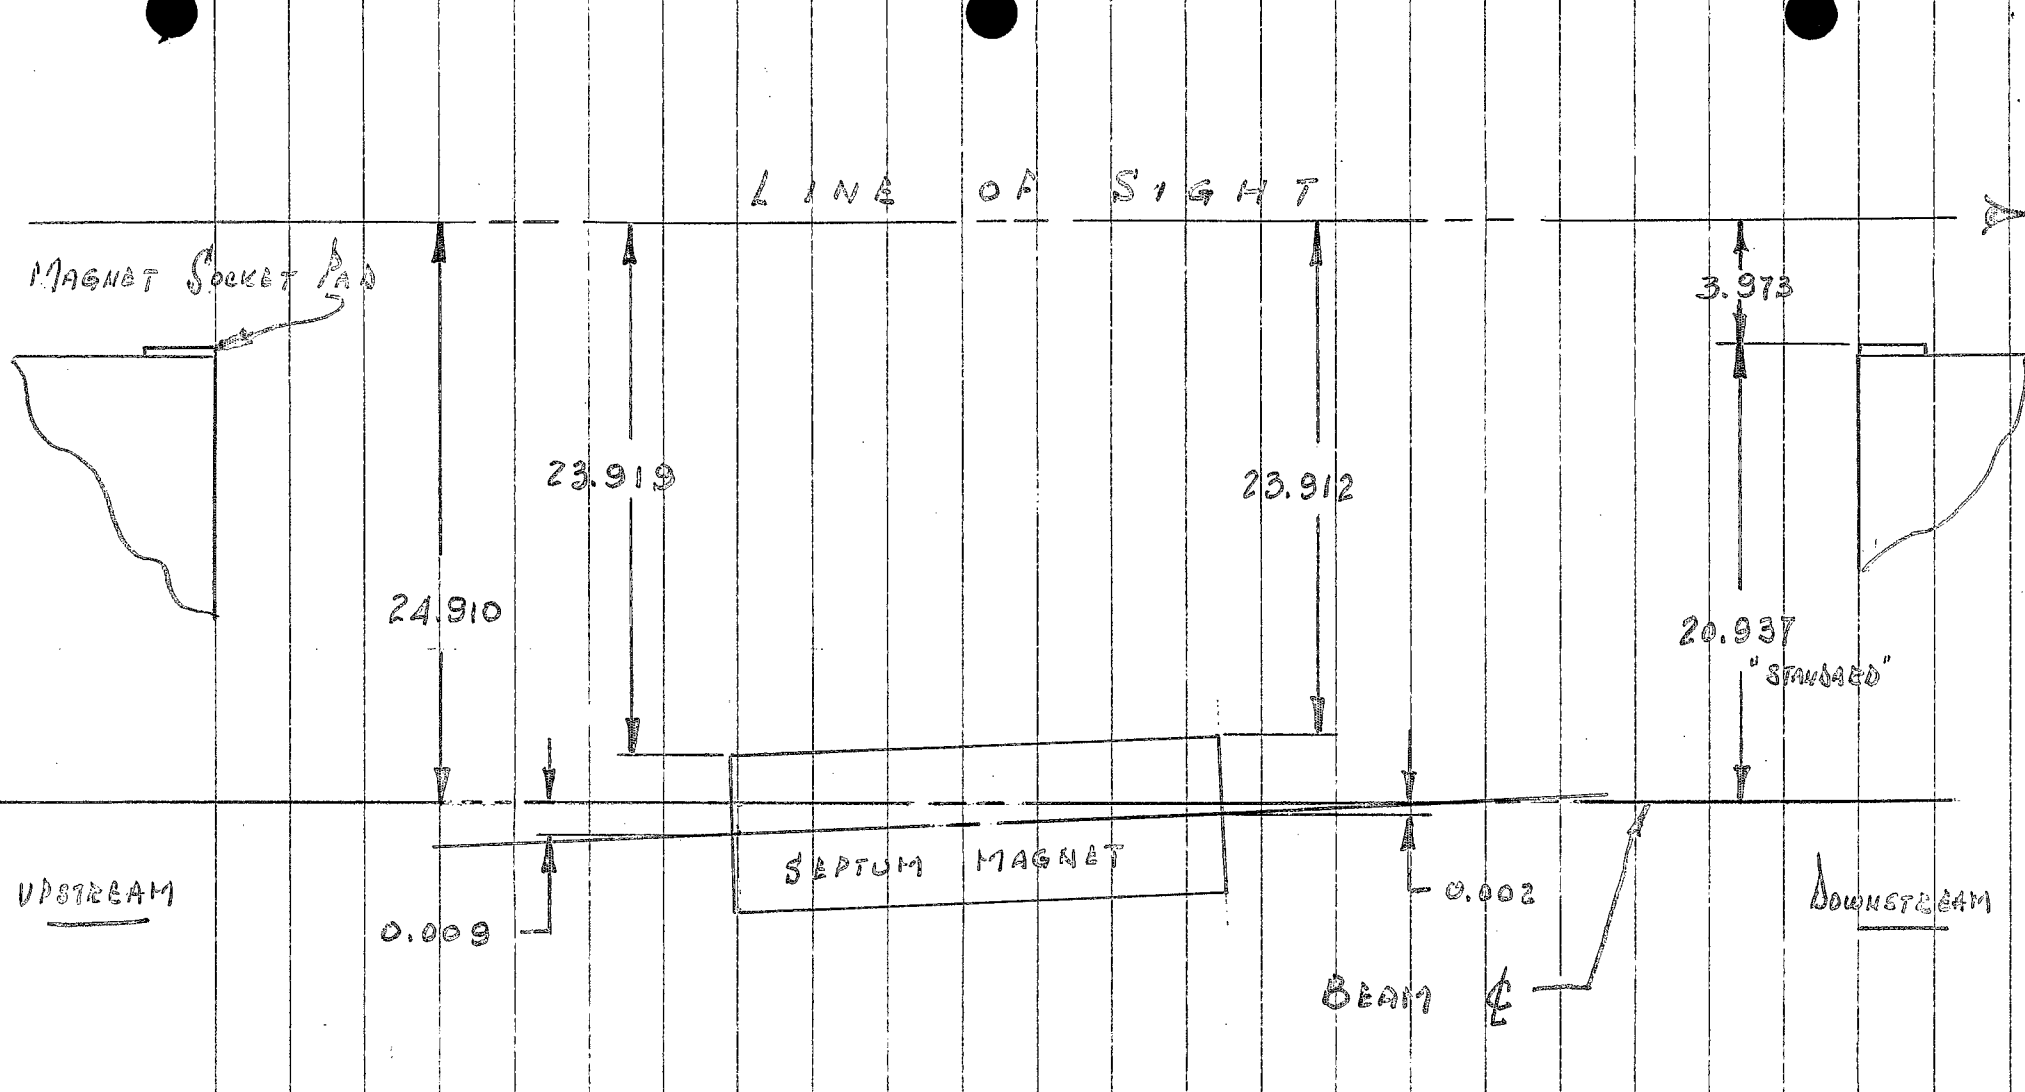

UPSTREAM

DOWNSTREAM

SEPTUM MAGNET

BEAM

"STANDARD"

LINE OF SIGHT

MAGNET SOCKET PAD

24.910

23.919

23.912

3.973

20.937

0.009

0.002


F 5 SEPTUM MAGNET

SURVEY 3.20.68

A. PALLAS

RING INSTALLATION

THE DISPLACEMENT SHOWN IN THIS SKETCH
IN RED, WAS COLLECTED 18 JUNE 1968

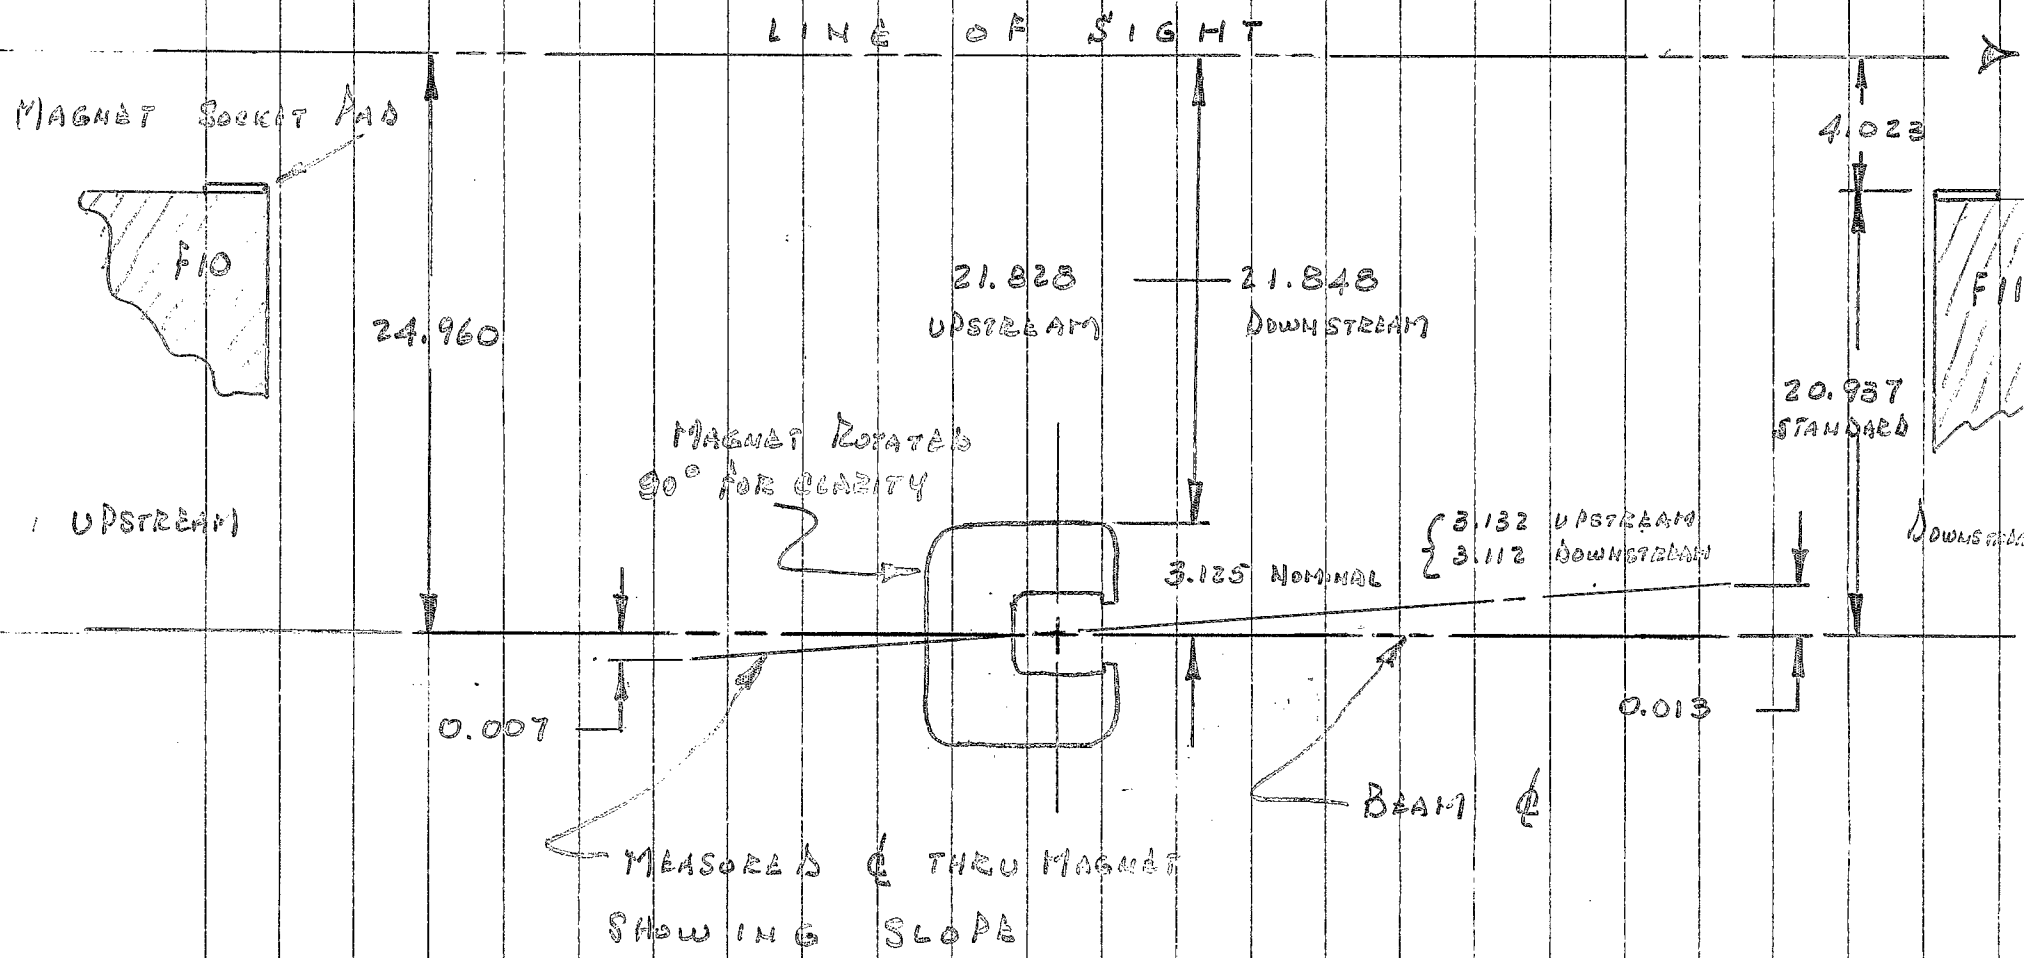

THE DISPLACEMENT SHOWN IN THIS SKETCH
 IN RED, WAS CORRECTED 18 JUNE 1968.

F10 SECTOR MAGNET
 SURVEY 3.20.68.
 F. PALLAS
RING INSTALLATION