



Brookhaven  
National Laboratory

BNL-101492-2014-TECH  
AD/AP 2;BNL-101492-2013-IR

## Network and communication

Z. Parsa

April 1987

Collider Accelerator Department  
**Brookhaven National Laboratory**

**U.S. Department of Energy**

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

## **DISCLAIMER**

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

ADD - AP TN 2  
May 1987



Network &  
Communications

Compiled  
by

ZOHREH PARSA

BROOKHAVEN NATIONAL LABORATORY  
ACCELERATOR DEVELOPMENT DEPARTMENT

ZOHREH PARSA  
Accelerator Development Department  
Brookhaven National Laboratory  
Upton, New York 11973

I. Introduction

This overview provides some information on Networking and Communication at Brookhaven National Laboratory. It is a collection of information from Users, Manuals, and Help files. This is edited for the proceedings of the Uton LUG (Local Users Group), Detailed informations should be made available by the networking group at the Applied Math Department. Our speciall thanks to R. Imossi for providing the information on "ENLDAG Networks", and D. Stampf for information on KERMIT.

Section ii, gives an overview of the facilities, and section iii describes the "ENLDAG Network". Informations on the Enlcluster is given in section iv , "IBM 3090" in section v, PC file transfer in section vi. and UNIX VAX in section vii.


ii) OVERVIEW OF ENL - COMPUTER FACILITIES

Following shows the link between the major facilities available at Brookhaven National Laboratory. These includes the NSIS computing facility, the Central Scientific Computing facility (AMD) and the AGS Computing Facility (see sec. ii), etc.

# BROOKHAVEN NATIONAL LABORATORY


\* VMS to VMS DECNET  
 \* VMS to UNIX TCP/IP or UUCP  
 \* UNIX to UNIX TCP/IP or UUCP

19.2 KB DECNET  
 On-Site Links  
 56 KB DECNET  
 On-Site Links

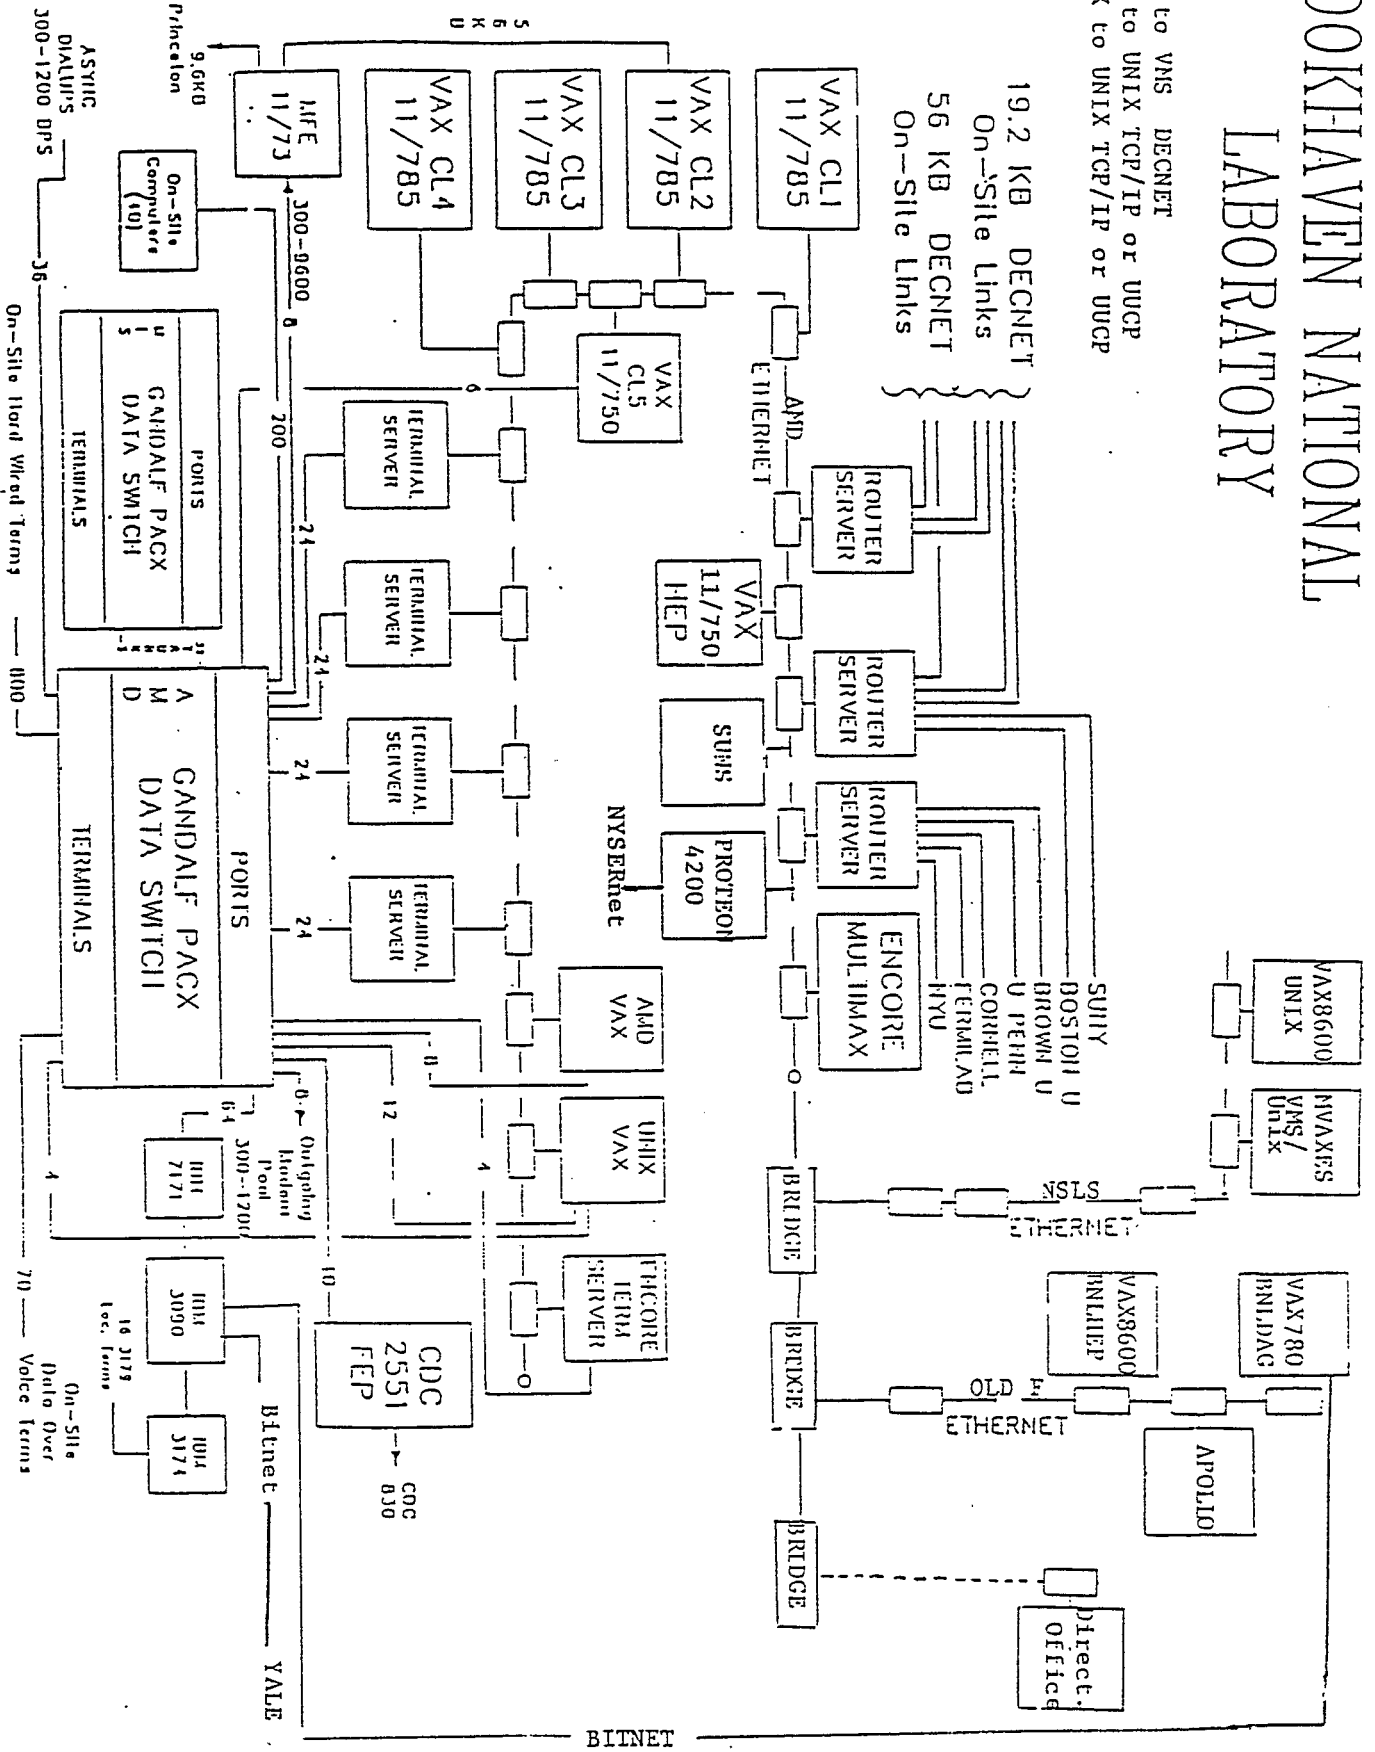

BITNET

# CENTRAL SCIENTIFIC COMPUTING FACILITY

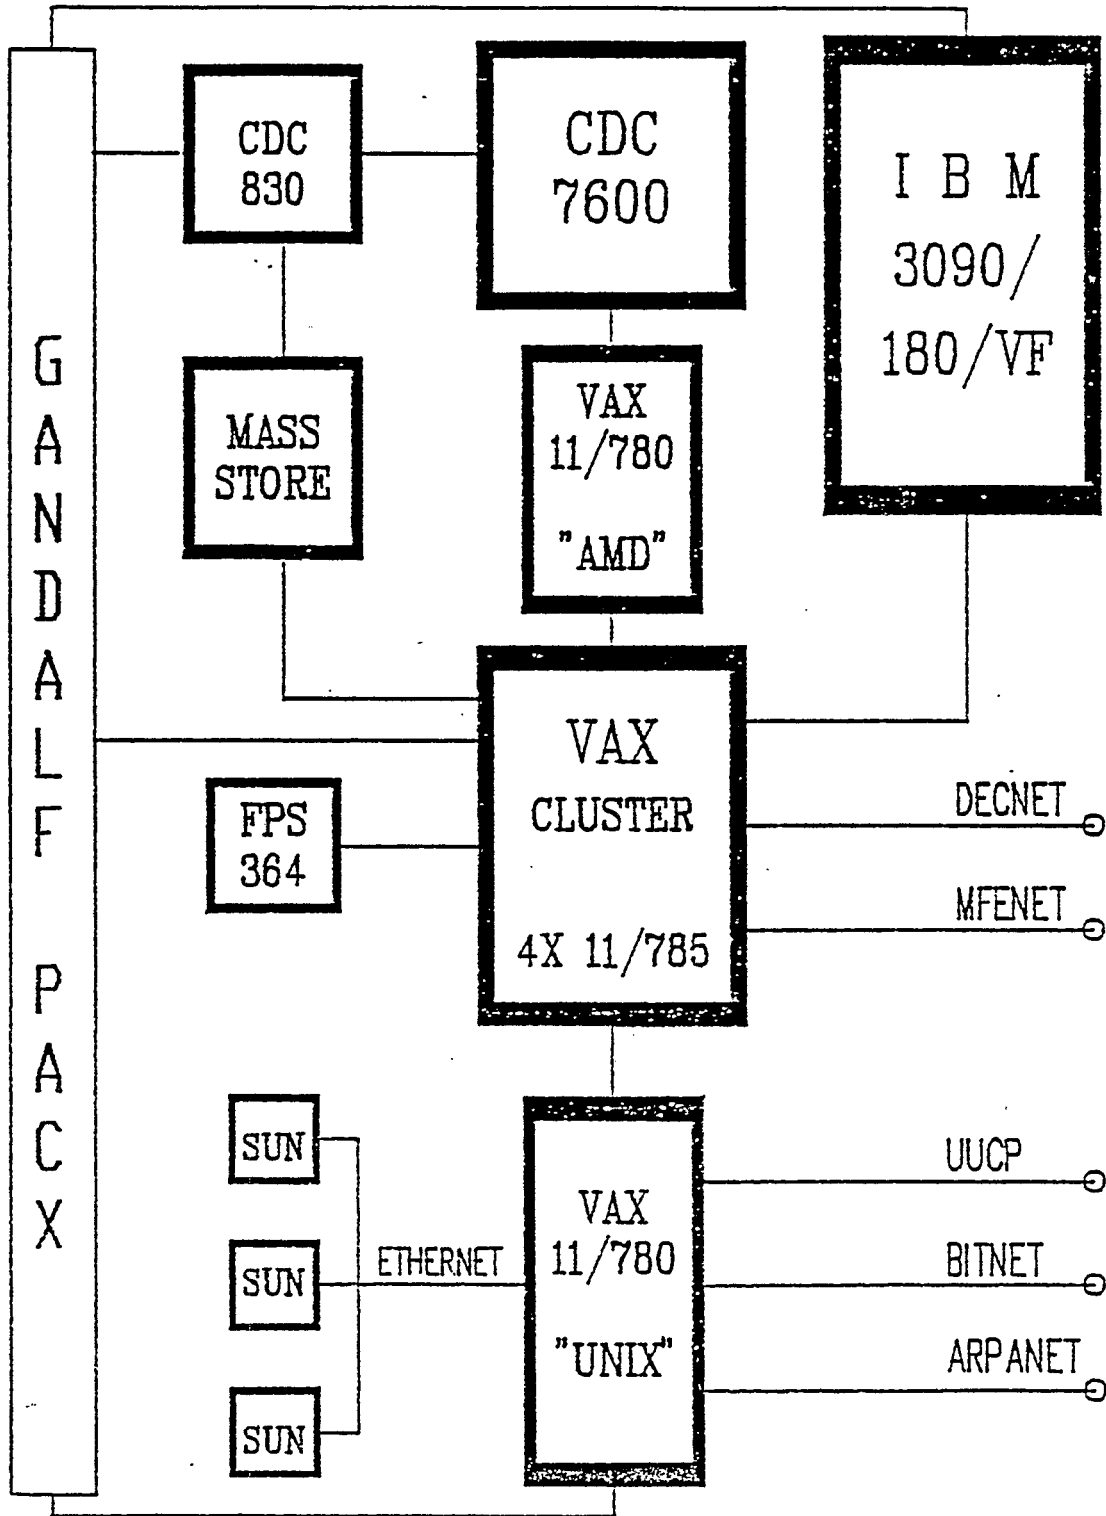

SECTION ii

## I. Networks Introduction:

There are four major world-wide networks:

TCP-IP  
BITNET  
DECnet  
and  
UUCP

1. TCP-IP: Internet, Arpanet, Milnet, Nysernet, NSFnet, CSNET, X25net, EDVNET. Also there are programs that use TCP-IP such as TELNET, FTP, etc.
2. Bitnet: RSCS, VNET, Netnorth, EARNnet, JNET, KNET.
3. DECnet: Hepnet, Physnet, Span, CCNET.
4. UUCP: Usenet.

## II. Network Capabilities:

There are many network capabilities such as task to task communication, remote job submittal, record level access, etc., however, the main functions are file transfer, mail, and remote login. Remember even though your computer may be connected to a particular network, it may have only one of the possible network functions. This is true of many networks only mail is possible.

## III. ENLDAG Network Capabilities.

The ENLDAG VAX is directly connected to all networks except UUCP which is a Unix specific network, however, even UUCP is indirectly accessible through a gateway - (see GMAIL).

## IV. ENLDAG Network commands:

Nodes	remote login	file transfer	mail *
DECnet	\$ SET HOST node	\$ COPY ...	\$ MAIL — — —
Bitnet	not available	\$ SEND/FILE **	\$ MAIL > SEND To:BITNET%"..."

TCP-IP	\$ TELENET node	\$ FTP node	\$ MAIL > SEND To:EXOS%"..."
UUCP	not available	not available	\$ GMAIL > SEND To: ...UUCP

...=username@node, e.g. parsa@bnlcl1

\* Note: It is recommended that GMAIL be used for all network mailing instead of mail.

\*\* Note: BITNET can transfer only one way, out.

#### V. GMAIL:

GMAIL (Gateway Mail) is an intelligent mailing program on VAX computers. It's equivalent on IBM computers is SENDGATE. GMAIL is patterned closely after VMS MAIL, but it takes the worry and confusion away from a user on how and what network to use when sending mail to a friend on a remote computer. All four major networks are handled. For example:

```

$ GMAIL
> HELP                ! get help in general
> HELP GATEWAYS      ! get help on gateways
> SEND
To username@node.uucp ! UUCP mode
.....
> SEND
To username@node.mil  ! Milnet mode
.....
> SEND
To BNLCL1::username  ! DECnet mode
.....
> SEND
To user@BNLMVA.BITNET ! ENL IEM 3090

```

#### VI. References:

##### 1) DECnet:

VMS Mail Utility manual  
VMS Phone Utility manual  
VMS DCL Dictionary

##### Interactive help:

```

$ HELP COPY
$ HELP MAIL
$ HELP SET HOST

```



## \$ HELP PHONE

## 2) Bitnet:

ENLDAG::BNL\$MANUAL:BITNET.MAN  
 ENLDAG::BNL\$MANUAL:GMAIL.MAN  
 JNET Users Guide

## Interactive help:

\$ HELP SEND  
 \$ HELP RECEIVE

## 3) TCP-IP:

ENLDAG::BNL\$MANUAL:INTERNET.MAN  
 EXOS TCP/IP Network Software Reference Manual

## 4) UUCP:

See the section on Unix-Vax

## VII. Labnode - Network Table:

Lab Nodes		Network			
node	type	DECnet	Bitnet	TCP-IP	UUCP
ENLCL1	VAXVMS	X		X	
ENLCL2	VAXVMS	X		X	
ENLCL3	VAXVMS	X		X	
ENLCL4	VAXVMS	X		X	
ENLDAG	VAXVMS	X	X	X	
all other lab VAXes		X			
ENLVMA	IBM 3090		X	X	
ENL-GW	VAX/UNIX		X	X	X
ENL-APPOLLO	Appollo node			X	
SUN work stations				X	X

Section ivBNLCluster Network

Protocol	Node	Remote Login	File Transfer	Mail
DECnet	All	SET HOST node	COPY	Mail
TCP/IP	All	TELENET node	FTP node	Mail   >SEND   TO:EXOS%"User@node"
MFEnet	ENLCL2	Yes	Yes	Yes
Kermit	All	No	Yes	No?
Bitnet	None	-	-	-

For example, to send a message to ENL (UNIX VAX) node to username PARSA

```
$ MAIL
MAIL> SEND
TO: EXOS%"PARSA@BNL"
SUBJ: .....

.....
.....
ctrl Z      (to end)
or ctrl C   (to cancel)
```

More detailed information is given in section iii, (ENLDAG) that may be used.

SECTION v

COMMUNICATION TO AND FROM IEM 3090

COMMUNICATIONS

1. BITNET This is now available on the IBM. The node to use is BNLVMA.

2. TCPIP is the protocol between the VAX CLUSTER and the IBM. It can transfer files in both directions. There are on-line HELP files available under HELP FTP or HELP TELNET. In all cases enter LOCAL\_FILE in the form FILENAME.EXT. To use it:

VAX → IBM

LOG onto VAX CLUSTER (any node)

FTP BNLVMA↵

ftp> It will ask you to LOG onto the IBM

—

—

SEND LOCAL\_FILENAME REMOTE\_FILENAME

—

—

ftp>QUIT↵ to leave FTP

DO NOT DO *cntrl*Y OR YOU WILL BE LEFT LOGGED ONTO THE IBM

If you do you must call the computer operators and ask them to

FORCE you out of the IBM.

IBM → VAX

FTP BNLCL1(2,3,4)↵

it will ask you to log onto the CLUSTER

ftp:

PUT LOCAL\_FILE <REMOTE\_FILE>←

ftp:

QUIT←

SECTION viPC FILE TRANSFER

There are several ways of file transfer to and from PCs and main frames, (e.g. IBM-PCs to (and from) VAXes). One of the commonly used programs is the IBM-PC-Intercome (ic) program (which emulates the PC to a VT100 terminal), and another is the program KERMIT.

EXAMPLES:I. FILE TRANSFER VIA INTERCOME (Version 3.+, some of the keys differ in older versions)

1. Use "ic"
2. Login
3. Press F9 {on PC, to get the MENUE}
4. Press F10 {twice and turn on the GANDALF}
  
5. Login to the Main Frame (e.g. VAX)
  
6. Press F9 {on PC, to get the MENUE} then  
Press F5 {file function key} and then  
Press F2 {start collecting text, key}  
or Press F3 {for appending text to an existing file}
  
7. Press F10 {on PC twice}' to get back to the HOST  
computer (e.g. VAX) and give commands, e. g.  
\$ type VAXfilename (you want to transfer).
8. Press F9 {on PC to get back the MENUE} then  
Press F5 {file function, key} and then  
Press F6 {save collected text, key}
  
9. Press F10 {on PC twice}, to get back to the HOST  
computer to logout, if the transfer is  
completed, or continue with other works.



```

; VAX tries to "shake hands" with the
; PC program.

ctrl-]C ; Back the the PC
KERMIT-86> rec ; and tell it to receive a file. It
; will have the same name as the VAX
; file and will be place in the
; default directory. A bell will ring
; when the transfer is complete.

KERMIT-86> conn ; re-connect to the VAX
C-KERMIT> set file type binary ; Prepare to transfer a binary file
C-KERMIT> rec ; now receiving a file.

ctrl-]C ; Back to the PC
KERMIT-86> send command.com ; As an example...
; Again, a bell will ring when complete.

KERMIT-86> conn ; Back to the VAX
C-KERMIT> exit
BNLVAX<2> logout

ctrl-]C ; Back the the micro

KERMIT-86> exit

A>

```

That is all there is to it. Remember that kermit is a communications protocol and not a program. The kermit programs that exist are all different and have been written by different people at different times. None of them are exactly like any other, and not all offer the same features. (I have known one or two that offered no features including file transfer!) Also, none of them was written at BNL. Still every implementation should be able to communicate with every other versions.

SECTION viiI. Communication on UNIX (ENL node)

This section provides some information on the UNIX mail, including examples and useful commands.

1. netexec will execute a command on the specified networked system, for example bldag.
  - Either netexec bldag 'show users'
  - or netexec bldag show users will work.
  - netexec bldag 'show time' gives the time.
2. netwrite will let you write on a user's terminal on a networked system.
3. query lets you know whether the connection to bldag is up, just type
  - q sy
4. vlpr and tlpr appear to route print files, via uux, to the VAX cluster print queues for the versatec and talaris printers, respectively.

In order to send mail to someone on the cluster, use:

```
mail USERNAME@bnl-cl1.ARPA
```

For example

```
mail ZOHREH@bnl-cl1.ARPA
```

---

We thank R. Thomas and others for information on Unix.