

Booster Coordinates

Z. Parsa

January 1986

Collider Accelerator Department
Brookhaven National Laboratory

U.S. Department of Energy

USDOE Office of Science (SC)

Notice: This technical note has been authored by employees of Brookhaven Science Associates, LLC under Contract No.DE-AC02-76CH00016 with the U.S. Department of Energy. The publisher by accepting the technical note for publication acknowledges that the United States Government retains a non-exclusive, paid-up, irrevocable, world-wide license to publish or reproduce the published form of this technical note, or allow others to do so, for United States Government purposes.

DISCLAIMER

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or any third party's use or the results of such use of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof or its contractors or subcontractors. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

BOOSTER COORDINATES

*Booster Technical Note
No. 3*

*Z. Parsa and F. Dell
January 17, 1986*

*HIGH ENERGY FACILITIES
Brookhaven National Laboratory
Upton, N.Y. 11973*

ABSTRACT

THIS NOTE DESCRIBES THE COORDINATES OF THE AGS - BOOSTER IN THE BOOSTER CENTERED FRAME OF REFERENCE WITH AXES IN THE NORTH (X) AND EAST (Y) DIRECTIONS. TRANSFORMATION FROM THE BOOSTER CENTERED FRAME TO THE AGS AND BNL GRIDS ARE DISCUSSED, AND THE COORDINATES OF THE MACHINE WITH RESPECT TO THESE FRAMES ARE GIVEN.

I. INTRODUCTION

In this note we describe the coordinates of the AGS - Booster with respect to three reference frames. In section II we give the coordinates of the Machine in the Booster reference frame with axes in the North (X) and East (Y) directions, with the unit of length expressed in meters.

In section III, the transformation from the Booster centered reference frame to the AGS and BNL grids are discussed. Then in Section IV, the coordinates of the Booster with respect to these frames are tabulated, (in inches and feet units respectively).

Layout of the Booster lattice [1,2] showing relative position of magnets and the labeling convention of the lattice and its superperiods are also included (see Figures 1-3).

II. BOOSTER CENTERED COORDINATE SYSTEM

The coordinates of the Booster lattice in the Booster centered coordinate system (with East (X) and North (Y) axes where the length is measured in meters) using Tape 5 [3] of program SYNCH, were generated assuming that:

1. The magnets have sharp edges where the field becomes zero.
2. The values listed in Table I correspond to the coordinates of an on-axis point of the downstream end of that element when viewed in a clockwise direction.

We note that, the effect of the earth's curvature for the Booster is negligible.

III. TRANSFER OF COORDINATES TO AGS AND BNL GRID

We can use the following transformation from the Booster centered frame of reference to that of AGS and BNL grids assuming that the axes of the Booster centered coordinate system are parallel to those of 1) AGS and 2) BNL grids. Here X_{BST} and Y_{BST} are the x and y distances expressed in the Booster coordinate system, with E and N as the East and North coordinates and EO and NO are the the coordinates of the Booster in the 1) AGS [E(inch),N(inch)] and 2) BNL [E(feet),N(feet)] grids respectively, (see Table II [4]):

1. AGS GRID

$$E(\text{inch}) = EO_{AGS}(\text{inch}) + X_{BST}(\text{inch})$$

$$N(\text{inch}) = NO_{AGS}(\text{inch}) + Y_{BST}(\text{inch})$$

$$EO_{AGS}(\text{inch}) = 1153.6786$$

$$NO_{AGS}(\text{inch}) = 15452.8$$

2. BNL GRID

$$E(\text{feet}) = EO_{BNL}(\text{feet}) + X_{BST}(\text{feet})$$

$$N(\text{feet}) = NO_{BNL}(\text{feet}) + Y_{BST}(\text{feet})$$

$$EO_{BNL}(\text{feet}) = 99,180.5694 \text{ feet, and}$$

$$NO_{BNL}(\text{feet}) = 105,920.3314 \text{ feet .}$$

where the values for EO and NO were obtained from Fig.3, [5], (using the conversion factor of 2.54 cm/inch). Note that the origins of the two systems are different.

AKNOWLEDGEMENT:

We thank E. Courant, and other members of the Booster Design study group for discussions and their efforts. We also thank Ms. K. Brown for our drawings.

REFERENCES:

-
1. Booster Lattice, Booster Tech. Note No. 1, E. Courant and Z. Parsa, (January 1986).
 2. Booster Parameters, Booster Tech. Note No. 2, Z. Parsa, (January 1986).
 3. Using DUAO:[PARSA1.BOOSTER]SYNBOOST.DAT, a tape 5 [BSTR5, E. Courant] was generated.
 4. Obtained from Y.Y. LEE, private communication.
 5. Construction map for the Booster; J. Feldman, P. Mohn and M. Schaeffer.

TABLE I

ELEMENT	X (M)	Y (M)	E-AGS (IN)	N-AGS (IN)	ANGLE	S (ORBIT)
0						
1	31.86063	-5.55399	2408.03542	15234.13914	99.89	0.000
2	31.82006	-5.80257	2406.43829	15224.35226	100.33	.252
3	31.77174	-6.09866	2404.53601	15212.69543	100.87	.552
4	31.18098	-8.42167	2381.27751	15121.23823	105.11	2.952
5	30.85098	-9.36565	2368.28561	15084.07355	106.89	3.952
6	30.76787	-9.60342	2365.01327	15074.71270	107.33	4.204
7	30.68475	-9.84118	2361.74094	15065.35184	107.78	4.456
8	30.58575	-10.12438	2357.84336	15054.20244	108.32	4.756
9	29.60057	-12.30951	2319.05684	14968.17347	112.58	7.156
10	29.11167	-13.18185	2299.80873	14933.82943	114.36	8.156
11	28.98853	-13.40157	2294.96062	14925.17902	114.81	8.408
12	28.86539	-13.62129	2290.11250	14916.52862	115.26	8.659
13	27.05645	-16.84895	2218.89450	14789.45565	121.91	12.359
14	26.93331	-17.06867	2214.04638	14780.80524	122.36	12.611
15	26.81016	-17.28839	2209.19827	14772.15483	122.82	12.863
16	26.66349	-17.55009	2203.42383	14761.85162	123.35	13.163
17	25.31384	-19.53095	2150.28779	14683.86484	127.65	15.563
18	24.68088	-20.30514	2125.36832	14653.38496	129.44	16.563
19	24.52146	-20.50014	2119.09173	14645.70783	129.90	16.815
20	24.36203	-20.69514	2112.81514	14638.03071	130.35	17.067
21	24.17215	-20.92740	2105.33930	14628.88675	130.88	17.367
22	22.49902	-22.64380	2039.46825	14561.31174	135.18	19.767
23	21.74125	-23.29632	2009.63459	14535.62213	136.98	20.767
24	21.55038	-23.46067	2002.12024	14529.15156	137.43	21.019
25	21.35952	-23.62502	1994.60589	14522.68099	137.88	21.271
26	18.55575	-26.03933	1884.22134	14427.62945	144.53	24.971
27	18.36489	-26.20368	1876.70699	14421.15888	144.98	25.223
28	18.17402	-26.36804	1869.19264	14414.68832	145.42	25.474
29	17.94669	-26.56379	1860.24254	14406.98143	145.96	25.774
30	16.00093	-27.96359	1783.63794	14351.87143	150.22	28.174
31	15.14136	-28.47460	1749.79557	14331.75266	152.00	29.174
32	14.92486	-28.60331	1741.27277	14326.68525	152.45	29.426
33	14.70835	-28.73203	1732.74898	14321.61784	152.89	29.678
34	14.45048	-28.88533	1722.59657	14315.58221	153.42	29.978
35	12.29121	-29.92598	1637.58601	14274.61170	157.67	32.378
36	11.35596	-30.27997	1600.76518	14260.67508	159.44	33.378
	11.12040	-30.36913	1591.49093	14257.16479	159.89	33.630

TABLE I

	ELEMENT	X (M)	Y (M)	E-AGS(IN)	N-AGS(IN)	ANGLE	S (ORBIT)
37	GD	10. 88483	-30. 45830	1582. 21648	14253. 65450	160. 33	33. 882
38	S30	10. 60426	-30. 56449	1571. 17043	14249. 47352	160. 87	34. 182
39	BEND	8. 29709	-31. 21438	1480. 33693	14223. 88737	165. 11	36. 582
40	S100	7. 31458	-31. 40059	1441. 65542	14216. 55635	166. 89	37. 582
41	GF	7. 06711	-31. 44749	1431. 91251	14214. 70984	167. 33	37. 834
42	GF	6. 81964	-31. 49439	1422. 16961	14212. 86334	167. 78	38. 086
43	S30	6. 52488	-31. 55025	1410. 56515	14210. 66404	168. 32	38. 386
44	BEND	4. 13991	-31. 78963	1316. 66862	14201. 23967	172. 58	40. 786
45	S100	3. 13999	-31. 80240	1277. 30175	14200. 73700	174. 36	41. 786
46	GD	2. 88814	-31. 80562	1267. 38622	14200. 61039	174. 81	42. 037
47	GD	2. 63628	-31. 80883	1257. 47069	14200. 48378	175. 26	42. 289
48	S370	-1. 06341	-31. 85607	1111. 81327	14198. 62389	181. 91	45. 989
49	GF	-1. 31527	-31. 85929	1101. 89774	14198. 49728	182. 36	46. 241
50	GF	-1. 56712	-31. 86251	1091. 98221	14198. 37067	182. 82	46. 493
51	S30	-1. 86710	-31. 86634	1080. 17215	14198. 21987	183. 35	46. 793
52	BEND	-4. 25741	-31. 68793	986. 06560	14205. 24364	187. 65	49. 193
53	S100	-5. 24435	-31. 52687	947. 20951	14211. 58459	189. 44	50. 193
54	GD	-5. 49294	-31. 48630	937. 42263	14213. 18171	189. 90	50. 445
55	GD	-5. 74152	-31. 44574	927. 63576	14214. 77884	190. 35	50. 697
56	S30	-6. 03761	-31. 39742	915. 97893	14216. 68113	190. 88	50. 997
57	BEND	-8. 36062	-30. 80665	824. 52173	14239. 93962	195. 18	53. 397
58	S100	-9. 30460	-30. 47666	787. 35705	14252. 93153	196. 98	54. 397
59	GF	-9. 54237	-30. 39354	777. 99619	14256. 20386	197. 43	54. 649
60	GF	-9. 78013	-30. 31042	768. 63534	14259. 47620	197. 88	54. 901
61	S370	-13. 27287	-29. 08945	631. 12602	14307. 54625	204. 53	58. 601
62	GD	-13. 51064	-29. 00633	621. 76517	14310. 81858	204. 98	58. 852
63	GD	-13. 74840	-28. 92321	612. 40431	14314. 09092	205. 42	59. 104
64	S30	-14. 03160	-28. 82421	601. 25491	14317. 98849	205. 96	59. 404
65	BEND	-16. 21673	-27. 83903	515. 22594	14356. 77501	210. 22	61. 804
66	S100	-17. 08907	-27. 35013	480. 88190	14376. 02312	212. 00	62. 804
67	GF	-17. 30879	-27. 22699	472. 23149	14380. 87124	212. 45	63. 056
68	GF	-17. 52851	-27. 10385	463. 58109	14385. 71936	212. 89	63. 308
69	S30	-17. 79021	-26. 95718	453. 27787	14391. 49379	213. 42	63. 608
70	BEND	-19. 77108	-25. 60752	375. 29109	14444. 62983	217. 67	66. 008
71	S100	-20. 54527	-24. 97457	344. 81121	14469. 54930	219. 44	67. 008
72	GD	-20. 74027	-24. 81514	337. 13409	14475. 82589	219. 89	67. 260

TABLE I

	ELEMENT	X (M)	Y (M)	E-AGS (IN)	N-AGS (IN)	ANGLE	S (ORBIT)
73	GD	-20.93527	-24.65572	329.45697	14482.10248	220.33	67.512
74	S30	-21.16752	-24.46583	320.31300	14489.57832	220.87	67.812
75	BEND	-22.88393	-22.79271	252.73799	14555.44937	225.11	70.212
76	S100	-23.53644	-22.03493	227.04838	14585.28303	226.89	71.212
77	GF	-23.70080	-21.84407	220.57781	14592.79738	227.33	71.464
78	GF	-23.86515	-21.65320	214.10724	14600.31174	227.78	71.716
79	S30	-24.06090	-21.42587	206.40036	14609.26183	228.32	72.016
80	BEND	-25.46070	-19.48011	151.29036	14685.86643	232.58	74.416
81	S100	-25.97171	-18.62054	131.17159	14719.70780	234.36	75.416
82	GD	-26.10043	-18.40404	126.10418	14728.23160	234.81	75.667
83	GD	-26.22914	-18.18753	121.03677	14736.75940	235.26	75.919
84	S370	-28.11990	-15.00712	46.59735	14861.98848	241.91	79.619
85	GF	-28.24861	-14.79062	41.52994	14870.49227	242.36	79.871
86	GF	-28.37732	-14.57411	36.46252	14879.01607	242.82	80.123
87	S30	-28.53063	-14.31624	30.42689	14889.16848	243.35	80.423
88	BEND	-29.57128	-12.15697	-10.54362	14974.17903	247.65	82.823
89	S100	-29.92527	-11.22172	-24.48024	15010.99987	249.44	83.823
90	GD	-30.01443	-10.98616	-27.99053	15020.27411	249.90	84.075
91	GD	-30.10359	-10.75059	-31.50081	15029.54836	250.35	84.327
92	S30	-30.20979	-10.47002	-35.68180	15040.59461	250.88	84.627
93	BEND	-30.85968	-8.16285	-61.26795	15131.42812	255.18	87.027
94	S100	-31.04589	-7.18034	-68.59897	15170.10963	256.98	88.027
95	GF	-31.09279	-6.93287	-70.44547	15179.85253	257.43	88.279
96	GF	-31.13969	-6.68540	-72.29197	15189.59944	257.88	88.531
97	S370	-31.82866	-3.05011	-99.41675	15332.71703	264.53	92.231
98	GD	-31.87556	-2.80264	-101.26325	15342.45993	264.98	92.482
99	GD	-31.92246	-2.55517	-103.10975	15352.20284	265.42	92.734
100	S30	-31.97832	-2.26041	-105.30906	15363.80729	265.96	93.034
101	BEND	-32.21770	1.2456	-114.73342	15457.70382	270.22	95.434
102	S100	-32.23047	1.12448	-115.36271	15497.07069	272.00	96.434
103	GF	-32.23368	1.37633	-115.36271	15506.98622	272.44	96.686
104	GF	-32.23690	1.62818	-115.48932	15516.90175	272.89	96.938
105	S30	-32.24073	1.92816	-115.64012	15528.71181	273.42	97.238
106	BEND	-32.06233	4.31847	-108.61635	15622.81837	277.67	99.638
107	S100	-31.90127	5.30541	-102.27540	15661.67446	279.44	100.638
108	GD	-31.86070	5.55400	-100.67827	15671.46133	279.89	100.890

TABLE I

	ELEMENT	X (M)	Y (M)	E-AGS(IN)	N-AGS(IN)	ANGLE	S (ORBIT)
109	GD	-31.82013	5.80258	-99.08114	15681.24821	280.33	101.142
110	S30	-31.77182	6.09867	-97.17886	15692.90503	280.87	101.442
111	BEND	-31.18105	8.42168	-73.92036	15784.34224	285.11	103.842
112	S100	-30.85105	9.36566	-60.92846	15821.52692	286.89	104.842
113	QF	-30.76794	9.60343	-57.65612	15830.88777	287.33	105.094
114	GF	-30.68482	9.84120	-54.38379	15840.24862	287.78	105.346
115	S30	-30.58582	10.12439	-50.48621	15851.39803	288.32	105.646
116	BEND	-29.60064	12.30953	-11.69969	15937.42699	292.58	108.046
117	S100	-29.11174	13.18186	7.54842	15971.77104	294.36	109.046
118	GD	-28.98860	13.40158	12.39653	15980.42145	294.81	109.297
119	GD	-28.86546	13.62131	17.24465	15989.07185	295.26	109.549
120	S370	-27.05652	16.84896	88.46265	16116.14482	301.91	113.249
121	QF	-26.93338	17.06868	93.31077	16124.79523	302.36	113.501
122	QF	-26.81024	17.28840	98.15888	16133.44563	302.82	113.753
123	S30	-26.66357	17.55010	103.93332	16143.74885	303.35	114.053
124	BEND	-25.31391	19.53096	157.06936	16221.73563	307.65	116.453
125	S100	-24.68096	20.30515	181.98883	16252.21551	309.44	117.453
126	GD	-24.52153	20.50015	188.26542	16259.89263	309.90	117.705
127	GD	-24.36211	20.69515	194.54201	16267.56975	310.35	117.957
128	S30	-24.17222	20.92741	202.01785	16276.71372	310.88	118.257
129	BEND	-22.49909	22.64381	267.88890	16344.28873	315.18	120.657
130	S100	-21.74132	23.29633	297.72256	16369.97833	316.98	121.657
131	QF	-21.55045	23.46068	305.23691	16376.44890	317.43	121.909
132	QF	-21.35959	23.62503	312.75126	16382.91947	317.88	122.161
133	S370	-18.55582	26.03934	423.13581	16477.97101	324.53	125.861
134	GD	-18.36496	26.20370	430.65016	16484.44158	324.98	126.112
135	GD	-18.17409	26.36805	438.16451	16490.91215	325.42	126.364
136	S30	-17.94676	26.56380	447.11461	16498.61903	325.96	126.664
137	BEND	-16.00100	27.96360	523.71921	16553.72904	330.22	129.064
138	S100	-15.14143	28.47461	557.56058	16573.84780	332.00	130.064
139	QF	-14.92493	28.60333	566.08438	16578.91522	332.44	130.316
140	QF	-14.70842	28.73204	574.60817	16583.98263	332.89	130.568
141	S30	-14.45055	28.88534	584.76058	16590.01826	333.42	130.868
142	BEND	-12.29129	29.92599	669.77114	16630.98877	337.67	133.268
143	S100	-11.35604	30.27998	706.59197	16644.92539	339.44	134.268
144	GD	-11.12047	30.36915	715.86622	16648.43568	339.89	134.520

TABLE I

	ELEMENT	X (M)	Y (M)	E-AGS(IN)	N-AGS(IN)	ANGLE	S (ORBIT)
145	GD	-10.88490	30.45831	725.14047	16651.94596	340.33	134.772
146	S30	-10.60433	30.56450	736.18671	16656.12695	340.87	135.072
147	BEND	-8.29716	31.21439	827.02022	16681.71310	345.11	137.472
148	S100	-7.31465	31.40060	865.70173	16689.04412	346.89	138.472
149	GF	-7.06718	31.44750	875.44464	16690.89062	347.33	138.724
150	GF	-6.81971	31.49440	885.18754	16692.73712	347.78	138.976
151	S30	-6.52496	31.55027	896.79200	16694.93643	348.32	139.276
152	BEND	-4.13998	31.78964	990.68853	16704.36080	352.58	141.676
153	S100	-3.14006	31.80241	1030.05540	16704.86347	354.36	142.676
154	GD	-2.88821	31.80563	1039.97093	16704.99008	354.81	142.927
155	GD	-2.63636	31.80884	1049.88646	16705.11669	355.26	143.179
156	S370	1.06334	31.85609	1195.54388	16706.97658	1.91	146.879
157	GF	1.31520	31.85930	1205.45941	16707.10319	2.36	147.131
158	GF	1.56705	31.86252	1215.37494	16707.22980	2.82	147.383
159	S30	1.86703	31.86635	1227.18500	16707.38060	3.35	147.683
160	BEND	4.25733	31.68794	1321.29155	16700.35683	7.65	150.083
161	S100	5.24428	31.52688	1360.14764	16694.01588	9.44	151.083
162	GD	5.49286	31.48632	1369.93452	16692.41875	9.90	151.335
163	GD	5.74145	31.44575	1379.72139	16690.82163	10.35	151.587
164	S30	6.03753	31.39743	1391.37822	16688.91934	10.88	151.887
165	BEND	8.36055	30.80667	1482.83542	16665.66085	15.18	154.287
166	S100	9.30453	30.47667	1520.00010	16652.66894	16.98	155.287
167	GF	9.54230	30.39355	1529.36095	16649.39660	17.43	155.539
168	GF	9.78006	30.31044	1538.72181	16646.12427	17.88	155.791
169	S370	13.27280	29.08946	1676.23113	16598.05422	24.53	159.491
170	GD	13.51056	29.00634	1685.59198	16594.78188	24.98	159.742
171	GD	13.74833	28.92322	1694.95284	16591.50955	25.42	159.994
172	S30	14.03152	28.82422	1706.10224	16587.61198	25.96	160.294
173	BEND	16.21666	27.83905	1792.13121	16548.82545	30.22	162.694
174	S100	17.08900	27.35014	1826.47525	16529.57734	32.00	163.694
175	GF	17.30872	27.22700	1835.12566	16524.72923	32.44	163.946
176	GF	17.52844	27.10386	1843.77606	16519.88111	32.89	164.198
177	S30	17.79014	26.95719	1854.07928	16514.10668	33.42	164.498
178	BEND	19.77101	25.60753	1932.06606	16460.97064	37.67	166.898
179	S100	20.54519	24.97458	1962.54594	16436.05117	39.44	167.898
180	GD	20.74019	24.81515	1970.22306	16429.77458	39.89	168.150

TABLE I

	ELEMENT	X (M)	Y (M)	E-AGS(IN)	N-AGS(IN)	ANGLE	S (ORBIT)
181	QD	20. 93519	24. 65573	1977. 90018	16423. 49799	40. 33	168. 402
182	S30	21. 16745	24. 46584	1987. 04415	16416. 02215	40. 87	168. 702
183	BEND	22. 88385	22. 79272	2054. 61916	16350. 15110	45. 11	171. 102
184	S100	23. 53637	22. 03494	2080. 30877	16320. 31744	46. 89	172. 102
185	QF	23. 70072	21. 84408	2086. 77934	16312. 80309	47. 33	172. 354
186	QF	23. 86508	21. 65321	2093. 24990	16305. 28873	47. 78	172. 606
187	S30	24. 06083	21. 42588	2100. 95679	16296. 33863	48. 32	172. 906
188	BEND	25. 46062	19. 48012	2156. 06679	16219. 73404	52. 58	175. 306
189	S100	25. 97164	18. 62055	2176. 18556	16185. 89266	54. 36	176. 306
190	QD	26. 10035	18. 40405	2181. 25297	16177. 34887	54. 81	176. 557
191	QD	26. 22907	18. 18754	2186. 32038	16168. 84507	55. 26	176. 809
192	S370	28. 11983	15. 00713	2260. 75980	16043. 63199	61. 91	180. 509
193	QF	28. 24854	14. 79063	2265. 82721	16035. 10820	62. 36	180. 761
194	QF	28. 37725	14. 57412	2270. 89463	16026. 58440	62. 82	181. 013
195	S30	28. 53056	14. 31625	2276. 93026	16016. 43199	63. 35	181. 313
196	BEND	29. 57121	12. 15698	2317. 90077	15931. 42143	67. 65	183. 713
197	S100	29. 92520	11. 22174	2331. 83739	15894. 60060	69. 44	184. 713
198	QD	30. 01436	10. 98617	2335. 34767	15885. 32635	69. 90	184. 965
199	QD	30. 10352	10. 75060	2338. 85796	15876. 05211	70. 35	185. 217
200	S30	30. 20972	10. 47003	2343. 03895	15865. 00586	70. 88	185. 517
201	BEND	30. 85961	8. 16286	2368. 62510	15774. 17235	75. 18	187. 917
202	S100	31. 04581	7. 18035	2375. 95612	15735. 49084	76. 98	188. 917
203	QF	31. 09271	6. 93288	2377. 80262	15725. 74793	77. 43	189. 169
204	QF	31. 13962	6. 68541	2379. 64912	15716. 00503	77. 88	189. 421
205	S370	31. 82859	3. 05012	2406. 77390	15572. 88344	84. 53	193. 121
206	QD	31. 87549	2. 80265	2408. 62040	15563. 14054	84. 98	193. 372
207	QD	31. 92239	2. 55518	2410. 46690	15553. 39763	85. 42	193. 624
208	S30	31. 97825	2. 26043	2412. 66621	15541. 79318	85. 96	193. 924
209	BEND	32. 21763	-1. 12455	2422. 09057	15447. 89665	90. 22	196. 324
210	S100	32. 23040	-1. 12446	2422. 59325	15408. 52978	92. 00	197. 324
211	QF	32. 23361	-1. 37632	2422. 71986	15398. 61425	92. 44	197. 576
212	QF	32. 23683	-1. 62817	2422. 84647	15388. 69872	92. 89	197. 828
213	S30	32. 24066	-1. 92815	2422. 99727	15376. 88865	93. 42	198. 128
214	BEND	32. 06225	-4. 31845	2415. 97350	15282. 78210	97. 67	200. 528
215	S100	31. 90119	-5. 30540	2409. 63255	15243. 92601	99. 44	201. 528
216	QD	31. 86063	-5. 56399	2408. 03542	15234. 13914	99. 89	201. 780

TABLE II

APEX AGS COORD (INCHES)			APEX LAB COORD (FEET)		
	NORTH	EAST	NORTH	EAST	
F7	15495.25	2421.487	102441.2714	98623.24061	
F8	15329.52	2423.603	102427.4606	98623.41695	
A1	15165.94	2396.908	102413.8290	98621.19241	
A2	15009.49	2342.214	102400.7909	98616.63457	
A3					
A4	14720.53	2180.268	102376.7111	98603.13907	
A5	14592.21	2075.361	102366.0181	98594.39678	
A6					
A7	14376.07	1824.352	102348.0062	98573.47937	
A8	14291.37	1681.884	102340.9481	98561.60708	
B1	14232.70	1526.874	102336.0588	98548.68953	
B2	14201.84	1364.030	102333.4870	98535.11921	
B3					
B4	14197.61	1032.813	102333.1345	98507.51775	
B5	14224.30	869.2342	102335.3590	98493.88619	
B6					
B7	14333.61	556.5451	102344.4681	98467.82876	
B8	14414.65	411.9614	102351.2208	98455.78012	
C1	14519.55	283.6453	102359.9631	98445.08711	
C2	14645.15	175.4957	102370.4294	98436.07464	
C3					
C4	14929.88	6.224075	102394.1567	98421.96867	
C5	15084.89	-52.4471	102407.0743	98417.07940	
C6					
C7	15410.34	-114.127	102434.1952	98411.93939	
C8	15576.07	-116.243	102448.0060	98411.76304	
D1	15739.65	-89.5489	102461.6375	98413.98758	
D2	15896.10	-34.8548	102474.6757	98418.54542	
D3					
D4	16185.06	127.0910	102498.7555	98432.04092	
D5	16313.38	231.9985	102509.4485	98440.78321	
D6					
D7	16529.52	483.0075	102527.4604	98461.70062	
D8	16614.22	625.4750	102534.5185	98473.57291	
E1	16672.89	780.4856	102539.4077	98486.49046	
E2	16703.75	943.3294	102541.9796	98500.06078	
E3					
E4	16707.98	1274.546	102542.3321	98527.66224	
E5	16681.29	1438.125	102540.1075	98541.29381	
E6					
E7	16571.98	1750.814	102530.9984	98567.35123	
E8	16490.94	1895.398	102524.2458	98579.39987	
F1	16386.04	2023.714	102515.5035	98590.09288	
F2	16260.44	2131.864	102505.0372	98599.10535	
F3					
F4	15975.71	2301.135	102481.3099	98613.21132	
F5	15820.70	2359.807	102468.3923	98618.10059	
F6					
CENTER			15452.8 NORTH (INCHES)		
COORD			1153.68 EAST (INCHES)		
CIRCUMFERENCE=			201.78 METERS		
ANGLE BETWEEN FA JUNCTION AND EAST IS			0.161764 RADIANS		

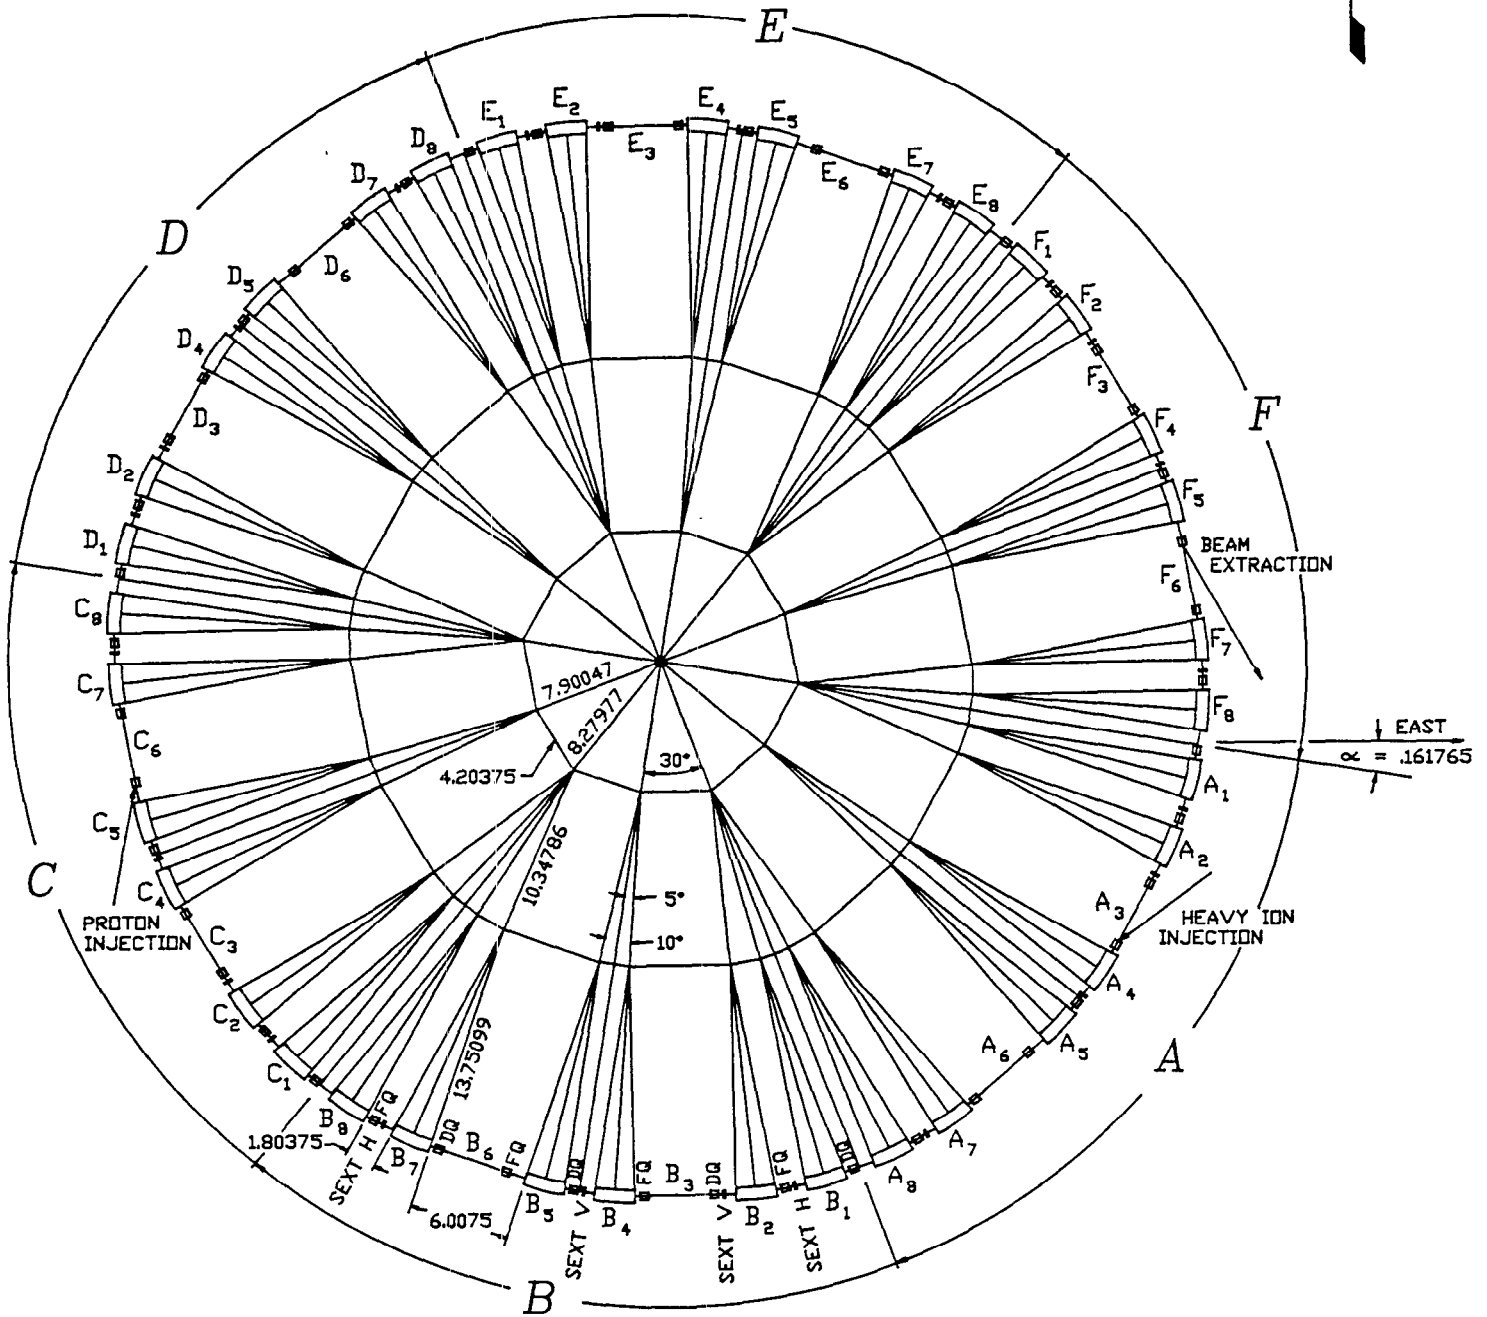


FIG. 1 Overall Layout of the AGS Booster

0 5
METERS

NOTE: ALL DIMENSIONS ARE IN METERS

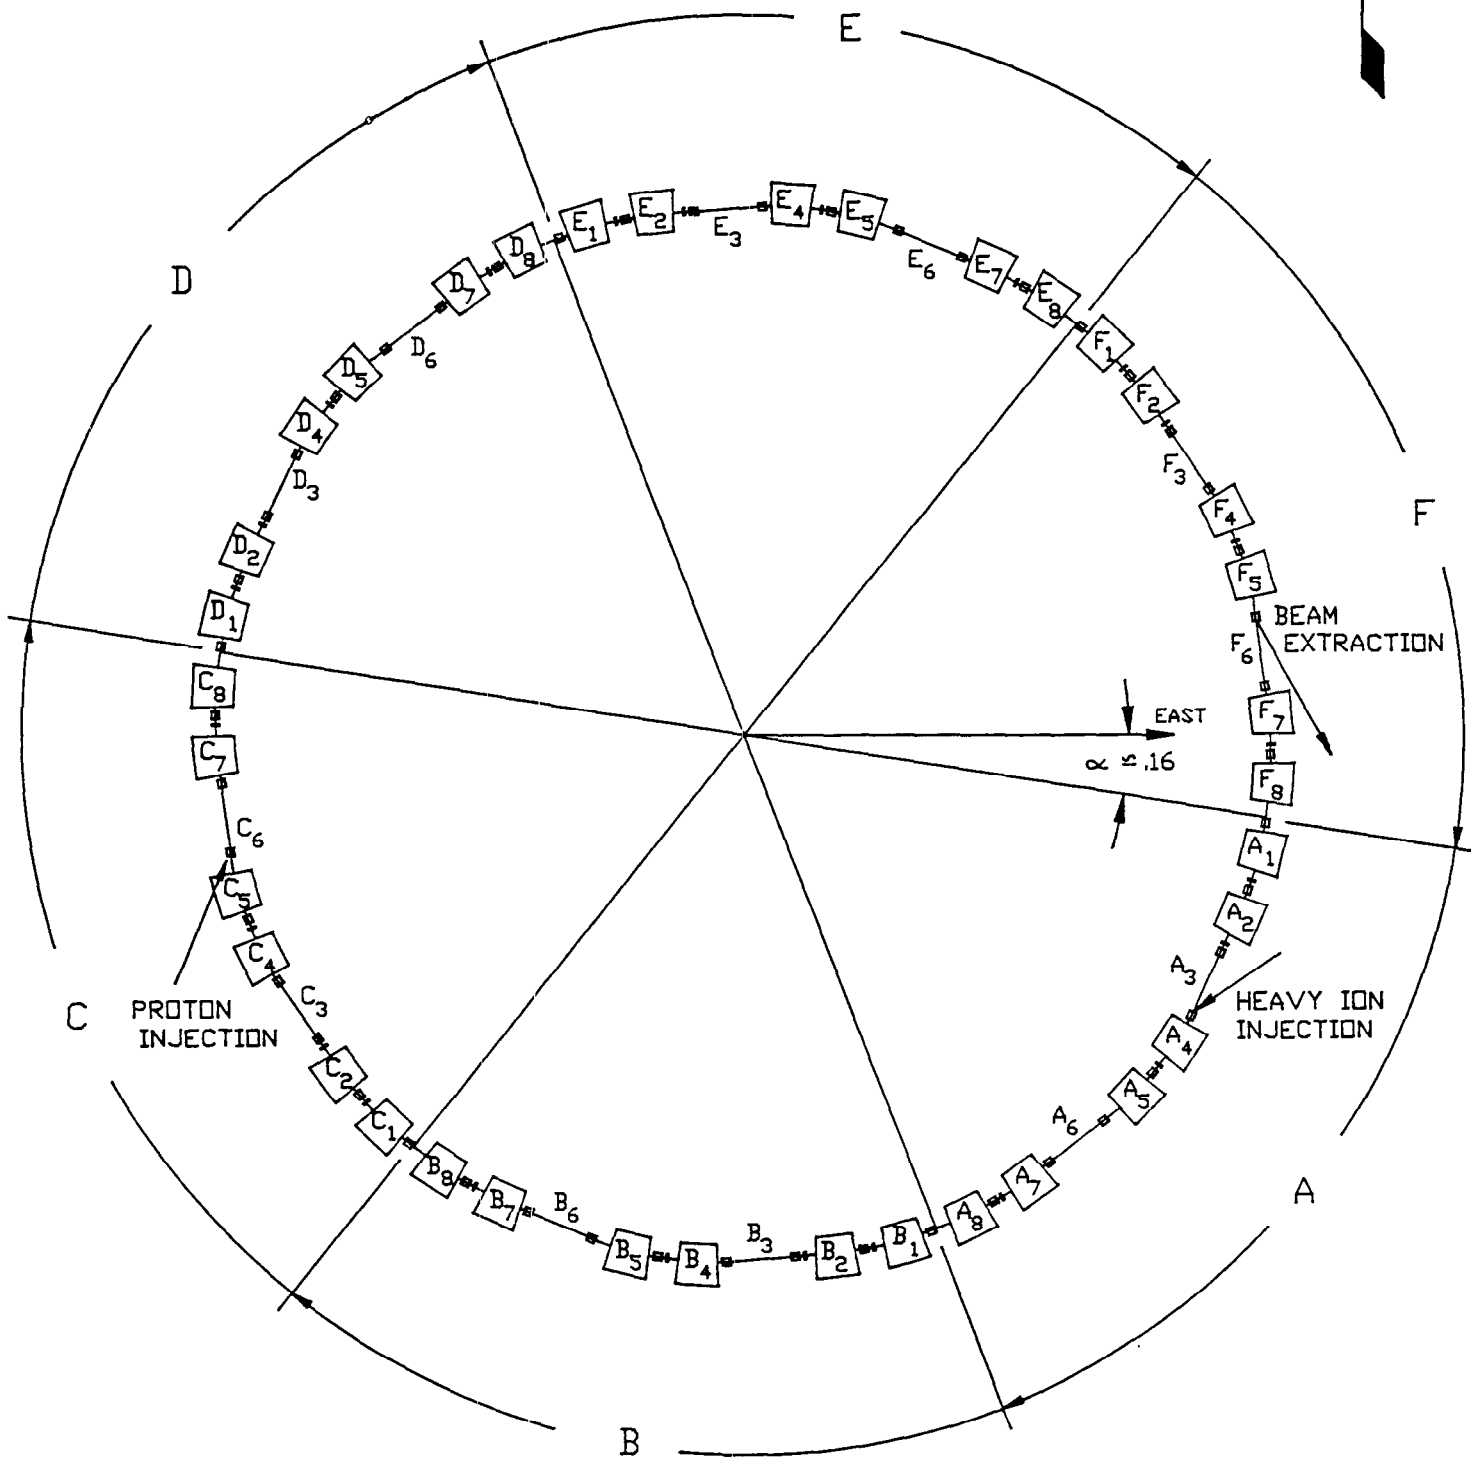



Fig.2 Layout of the AGS Booster showing the relative position of magnets (e.g. Dipole Apex locations) and labeling convention of the Booster Superperiods. (A to F, with the Beam in the Clockwise direction).

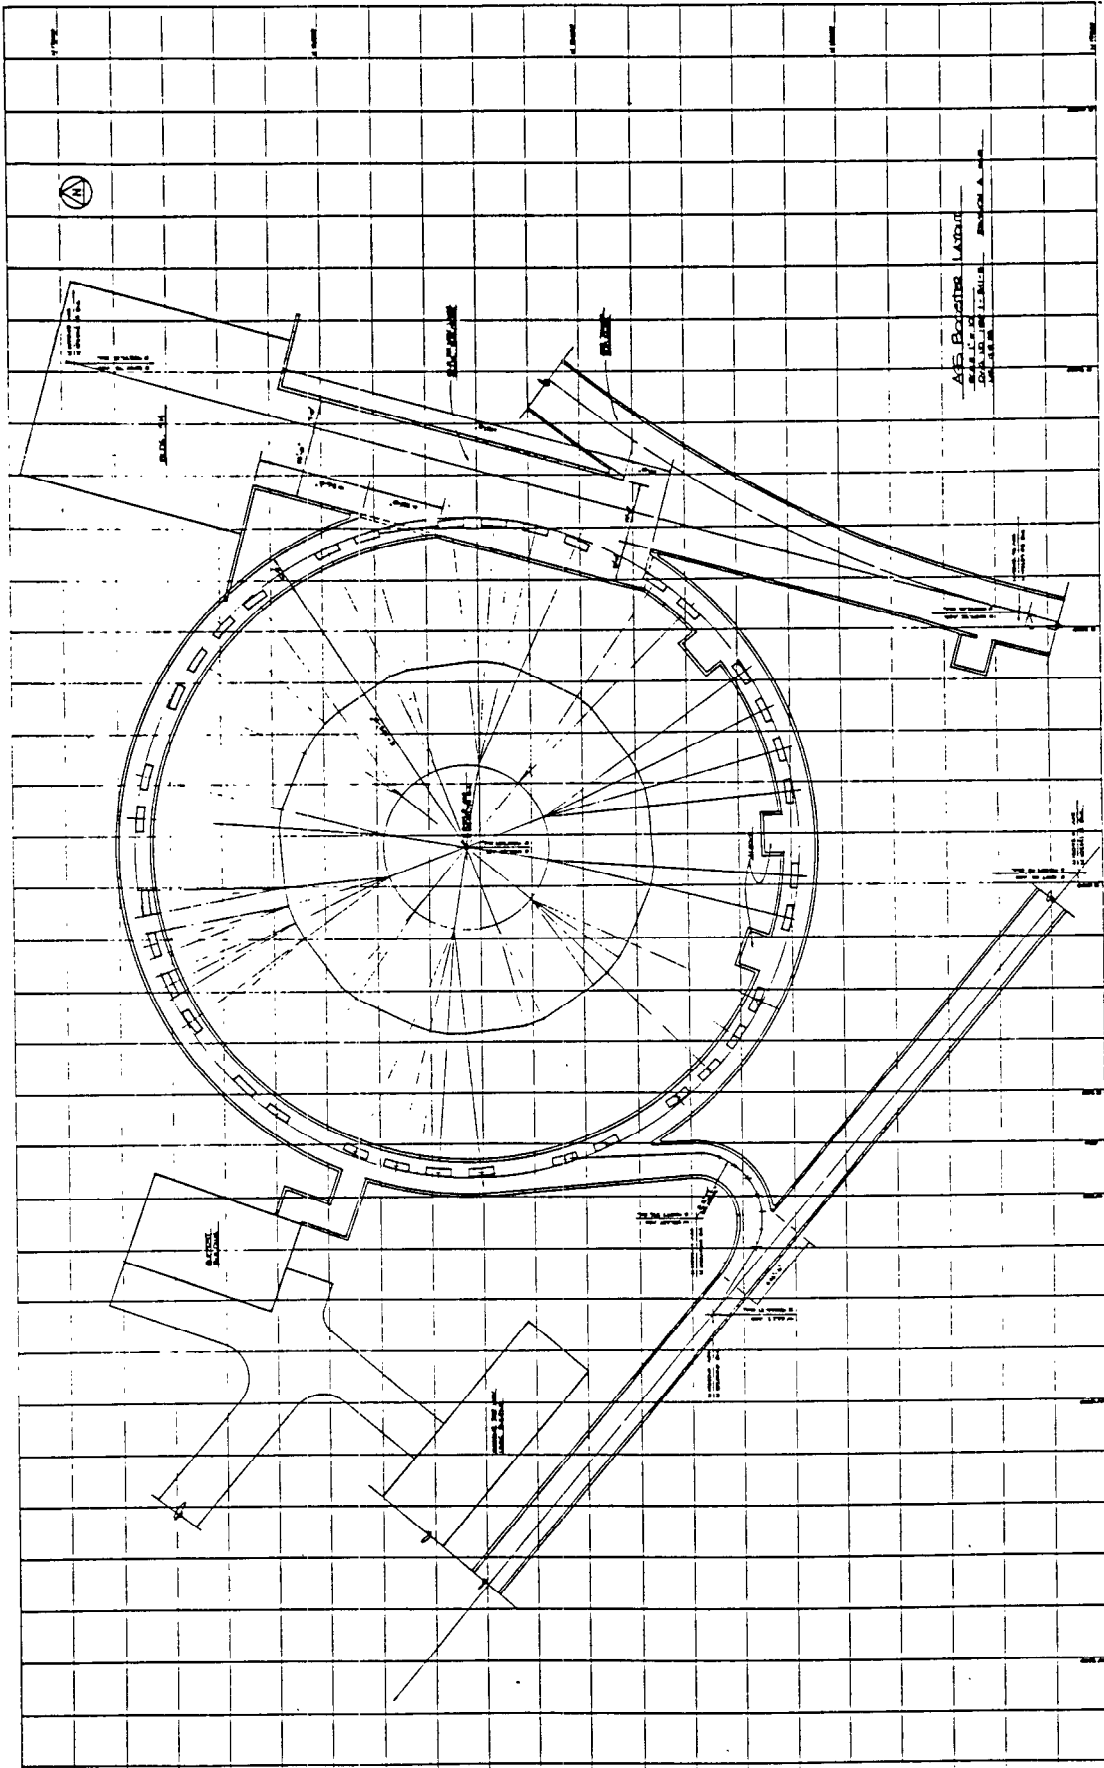


Fig. 3 Construction map of AGS Booster